

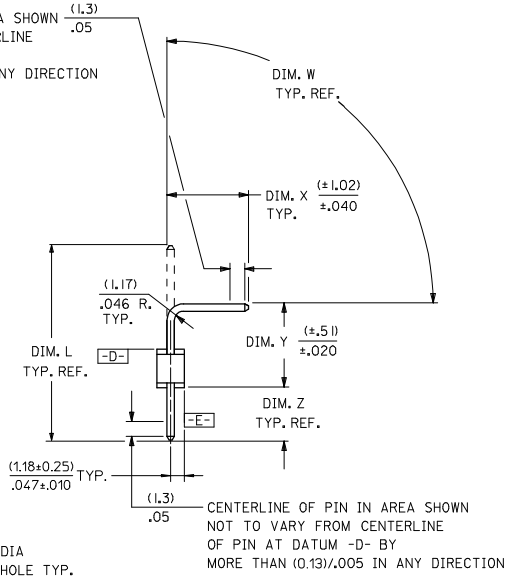


13 12 11 10 9 8 7 6 5 4 3 2 1

CENTERLINE OF PIN IN AREA SHOWN
NOT TO VARY FROM CENTERLINE
OF PIN AT DATUM -E- BY
MORE THAN (0.20)/.008 IN ANY DIRECTION



CENTERLINE OF PIN IN AREA SHOWN
NOT TO VARY FROM CENTERLINE
OF PIN AT DATUM -D- BY
MORE THAN (0.13)/.005 IN ANY DIRECTION



PCB LAYOUT: COMPONENT SIDE
TYPICAL PCB THICKNESS: (1.57)/.062

- NOTES:
- MATERIAL: NYLON, UL 94V-0, COLOR WHITE
 - FINISH:
 - (102) OVERALL TIN: 0.00508/0.000200 MIN. OVER COPPER UNDERPLATE: 0.00254/0.000100 MIN.
 - (103) OVERALL TIN: 0.00508/0.000200 MIN. OVER COPPER UNDERPLATE: 0.00127/0.000050 MIN.
 - (501) OVERALL GOLD: 0.00051/0.000020 MIN. OVER NICKEL UNDERPLATE: 0.00076/0.000030 MIN.
 - (503) OVERALL GOLD: 0.00076/0.000030 MIN. OVER NICKEL UNDERPLATE: 0.00127/0.000050 MIN.
 - (508) OVERALL GOLD: 0.00076/0.000030 MIN. OVER NICKEL UNDERPLATE: 0.00076/0.000030 MIN.
 - (516) OVERALL GOLD: 0.00025/0.000010 MIN. OVER NICKEL UNDERPLATE: 0.00076/0.000030 MIN.
 - PARTS CONFORM TO PRODUCT SPECIFICATION PS-10-07.
 - PACKAGING INFORMATION: SEE LEGEND.
 - PINS MUST CONFORM TO SOLDERABILITY SPECIFICATION SMES-152.
 - PIN PUSHOUT FORCE: 2 LBS. MIN.
 - PARTS ARE STACKABLE END TO END AND SIDE TO SIDE ON (2.54)/100 CENTERS.
 - THE PRIMARY SHIPPING CARTON WILL BE LABELED, "COMPLIANT TO ROHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC." CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD PLATING.
 - PARTS CONFORM TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

A-4094-N	*	*	*
NO. OF CKTS.			
VERSION			
LETTER CHANGES WHEN PIN NO. OR PRESS DIM. CHANGES.			
PLATING CODE			
SEE NOTE 2			
SECONDARY OPERATIONS			
CODE	PACKAGE		
BLANK	BULK PER PK-4094-001		
A	PK-40873-0020		

CKTS. NO. OF	DIM. B	DIM. A
2	.100 ± .002 (2.54 ± .05)	.190 ± .008 (4.83 ± .20)
3	.200 ± .005 (5.08 ± .13)	.290 ± .008 (7.37 ± .20)
4	.300 ± .005 (7.62 ± .13)	.390 ± .008 (9.91 ± .20)
5	.400 ± .005 (10.16 ± .13)	.490 ± .008 (12.45 ± .20)
6	.500 ± .006 (12.70 ± .15)	.590 ± .009 (14.99 ± .23)
7	.600 ± .006 (15.24 ± .15)	.690 ± .009 (17.53 ± .23)
8	.700 ± .006 (17.78 ± .15)	.790 ± .009 (20.07 ± .23)
9	.800 ± .007 (20.32 ± .18)	.890 ± .010 (22.61 ± .25)
10	.900 ± .007 (22.86 ± .18)	.990 ± .010 (25.15 ± .25)
11	1.000 ± .007 (25.40 ± .18)	1.090 ± .010 (27.69 ± .25)
12	1.100 ± .008 (27.94 ± .20)	1.190 ± .011 (30.23 ± .28)
13	1.200 ± .008 (30.48 ± .20)	1.290 ± .011 (32.77 ± .28)
14	1.300 ± .008 (33.02 ± .20)	1.390 ± .011 (35.31 ± .28)
15	1.400 ± .008 (35.56 ± .20)	1.490 ± .011 (37.85 ± .28)
16	1.500 ± .008 (38.10 ± .20)	1.590 ± .011 (40.39 ± .28)
17	1.600 ± .009 (40.64 ± .23)	1.690 ± .012 (42.93 ± .30)
18	1.700 ± .009 (43.18 ± .23)	1.790 ± .012 (45.47 ± .30)
19	1.800 ± .009 (45.72 ± .23)	1.890 ± .012 (48.01 ± .30)
20	1.900 ± .009 (48.26 ± .23)	1.990 ± .012 (50.55 ± .30)
21	2.000 ± .010 (50.80 ± .25)	2.090 ± .013 (53.09 ± .33)
22	2.100 ± .010 (53.34 ± .25)	2.190 ± .013 (55.63 ± .33)
23	2.200 ± .010 (55.88 ± .25)	2.290 ± .013 (58.17 ± .33)
24	2.300 ± .010 (58.42 ± .25)	2.390 ± .013 (60.71 ± .33)
25	2.400 ± .011 (60.96 ± .28)	2.490 ± .014 (63.25 ± .36)
26	2.500 ± .011 (63.50 ± .28)	2.590 ± .014 (65.79 ± .36)
27	2.600 ± .011 (66.04 ± .28)	2.690 ± .014 (68.33 ± .36)
28	2.700 ± .011 (68.58 ± .28)	2.790 ± .014 (70.87 ± .36)

14	AD1
13	AD1
12	AD1
11	AD1
10	AD1
9	AD1
8	AD1
7	AD1
6	AD1
5	AD1
4	AD1
3	AD1
2	AD1
1	AD3
SHEET	REV.

ADD 1:18 DIMENSION EC NO: UCP2009-0323 DRAWING: GERRILL 2008/08/22 CHK: CHOKRIPPER 2008/08/26 APPR: ESMITH 2008/08/27 AD3	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED): mm INCH		DIMENSION STYLE MM/IN		SCALE ---		DESIGN UNITS INCH		THIRD ANGLE PROJECTION			
		4 PLACES ±--- ±--- 3 PLACES ±--- ±.005		DRAWN BY: KSS DATE: 1984/09/10		FILE:		WAFER ASSY FLAT MINI KK (4030 WITH BENT PINS) 4094 SERIES DRAWING					
		2 PLACES ±0.13 ±.01 1 PLACE ±0.25 ±---		CHECKED BY: NP DATE: 1984/09/10		APPROVED BY: KJA DATE: 1984/09/10		MOLEX INCORPORATED					
		ANGULAR ±1/2°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SDA-4094		SHEET NO. 1 OF 14			

1b_frame_C.P.M.E.T Rev. D 2004/04/02 12 11 10 9 8 7 6 5 4 3 2 1

		13	12	11	10	9	8	7	6	5	4	3	2	1			
		ENG. NO.	PIN NO.	DIM. L	DIM. X	DIM. Z	DIM. Y	DIM. W	DIM. T	ENG. NO.	PIN NO.	DIM. L	DIM. X	DIM. Z	DIM. Y	DIM. W	DIM. T
J	A-4094-NA102	2766-3(I02)	(17.45) .687	(9.30) .366	(3.15) .124	(6.30) .248	90°			A-4094-NCM501	2766-1(I50 I)	(14.22) .560	(4.47) .176	(5.92) .233	(5.11) .201	90°	
	A-4094-NA501	2766-3(I50 I)	(17.45) .687	(9.30) .366	(3.15) .124	(6.30) .248	90°			A-4094-NCN501	2766-53(I50 I)	(20.85) .821		SEE SHT. 7		90°	
I	A-4094-NAB102	2766-40(I02)	(23.80) .937	(14.99) .590	(3.78) .149	(6.30) .248	90°			A-4094-NCR501	2766-73(I50 I)	(22.71) .894	(13.92) .548	(3.48) .137	(6.60) .260	90°	
	A-4094-NAC102	2766-54(I02)	(17.86) .703	(9.68) .381	(4.32) .170	(5.13) .202	90°			A-4094-NCS501	4166-74(I50 I)	(31.24) 1.230	(22.23) .875	(3.71) .146	(6.60) .260	90°	
	A-4094-NAJ102	2766-8(I02)	(21.39) .842	(10.19) .401	(4.09) .161	(8.41) .331	90°			A-4094-NCV501	2766-28(I50 I)	(15.88) .625	(7.65) .301	(3.23) .127	(6.30) .248	90°	
	A-4094-NAL102	2766-8(I02)	(21.39) .842	(12.47) .491	(3.91) .154	(6.30) .248	90°			A-4094-NCY508				SEE SHT. 8		90°	
H	A-4094-NAM102	2766-3(I02)	(17.45) .687	(4.93) .194	(7.29) .287	(6.53) .257	90°			A-4094-NCZ501	2766-3(I50 I)	(17.45) .687	(9.30) .366	(2.31) .091	(7.11) .280	90°	
	A-4094-NAP102	2766-3(I02)	(17.45) .687	(8.41) .331	(3.78) .149	(6.55) .258	90°			A-4094-NJ102	2766-28(I02)	(15.88) .625	(6.63) .261	(3.02) .119	(9.73) .383	55°	
	A-4094-NB102	2766-43(I02)	(13.46) .530	(4.85) .191	(3.61) .142	(6.30) .248	90°			A-4094-NM102	2766-3(I02)	(17.45) .687	(7.44) .293	(2.84) .112	(8.46) .333	90°	
G	A-4094-NBE102	2766-37(I02)	(20.32) .800	(11.53) .454	(3.56) .140	(6.50) .256	90°			A-4094-NR102	2766-37(I02)	(20.32) .800	(12.24) .482	(3.07) .121	(6.30) .248	90°	
	A-4094-NBE501	2766-37(I50 I)	(20.32) .800	(11.53) .454	(3.56) .140	(6.50) .256	90°			A-4094-NRG501	2766-53(I50 I)	(20.85) .821	(12.32) .485	(3.53) .139	(6.30) .248	90°	
	A-4094-NBF102	2766-4(I02)	(18.69) .736	(9.30) .366	(2.79) .110	(7.87) .310	90°			A-4094-NW102	2766-37(I02)	(20.32) .800	(9.30) .366	(3.61) .142	(8.71) .343	90°	
	A-4094-NBF501	2766-4(I50 I)	(18.69) .736	(9.30) .366	(2.79) .110	(7.87) .310	90°			A-4094-NZ102	2766-3(I02)	(17.45) .687	(5.13) .202	(7.95) .313	(5.66) .223	90°	
F	A-4094-NBH102	2766-37(I02)	(20.32) .800	(11.71) .461	(2.31) .091	(7.57) .298	90°			A-4094-NH102	2766-1(I02)	(14.22) .560	(5.23) .206	(3.96) .156	(6.30) .248	90°	
	A-4094-NBK103	4166-1(I103)	(16.51) .650	(5.00) .197	(7.67) .302	(5.13) .202	90°			A-4094-NDA102	4166-38(I02)	(27.00) 1.063	(9.30) .366	(3.15) .124	(15.82) .623	90°	
	A-4094-NBJ102	2766-4(I02)	(18.69) .736	(9.42) .371	(3.63) .143	(6.93) .273	90°			A-4094-NDB102	4166-30(I02)	(30.48) 1.200	(9.30) .366	(3.07) .121	(19.38) .763	90°	
E	A-4094-NBJ501	2766-4(I50 I)	(18.69) .736	(9.42) .371	(3.63) .143	(6.93) .273	90°			A-4094-NDC102	2766-40(I02)	(23.80) .937	(12.70) .500	(3.15) .124	(9.22) .363	90°	
	A-4094-NBL102	2766-8(I02)	(21.39) .842	(3.81) .150	(3.05) .120	(17.60) .693	25°			A-4094-NA508	2766-3(I508)	(17.45) .687	(9.30) .366	(3.15) .124	(6.30) .248	90°	
	A-4094-NBM102	2766-28(I02)	(15.88) .625	(5.79) .228	(4.06) .160	(6.30) .248	139°			A-4094-NDD102	2766-60(I02)	(23.24) .915	(9.53) .375	(8.64) .340	(6.35) .250	90°	
D	A-4094-NBP102	2766-3(I02)	(17.45) .687	(9.07) .357	(7.87) .310	(5.82) .229	105°			A-4094-NAR102	2766-26(I02)	(14.99) .590	(4.06) .160	(8.03) .316	(4.09) .161	90°	
	A-4094-NBR501	2766-52(I50 I)	(14.61) .575	(9.30) .366	(1.63) .064	(4.90) .193	90°			A-4094-NAT102	2766-4(I02)	(18.69) .736	(8.26) .325	(3.28) .129	(12.75) .502	45°	
	A-4094-NBT102	2766-39(I02)	(12.70) .500	(6.38) .251	(2.79) .110	(4.78) .188	90°			A-4094-NAT501	2766-4(I50 I)	(18.69) .736	(8.26) .325	(3.28) .129	(12.75) .502	45°	
C	A-4094-NCA102	2766-57(I02)	(13.84) .545	(5.23) .206	(3.61) .142	(6.30) .248	90°			A-4094-NDE501	2766-73(I50 I)	(22.71) .894	(9.98) .393	(3.00) .118	(11.00) .433	90°	
	A-4094-NCC102	2766-73(I02)	(22.71) .894	(10.74) .423	(3.25) .128	(13.61) .536	60°			A-4094-NDF102	2766-16(I02)	(22.23) .875	(6.12) .241	(11.05) .435	(6.35) .250	90°	
	A-4094-NCE102	2766-54(I02)	(17.86) .703	(9.14) .360	(3.91) .154	(6.10) .240	90°			A-4094-NDG102	2766-39(I02)	(12.70) .500	(4.60) .181	(3.10) .122	(6.30) .248	90°	
B	A-4094-NCM102	2766-1(I02)	(14.22) .560	(4.47) .176	(5.92) .233	(5.11) .201	90°			A-4094-NBK102	4166-1(I02)	(16.51) .650	(5.00) .197	(7.67) .302	(5.13) .202	90°	

UPDATE TITLE BLOCK EC NO. UCP2005-2329 DRAWN BY 2005/07/28 CHECKED BY 2005/07/27 APPROVED BY 2005/07/27 APPR: F.S.M.T.H.	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0 ▽=0 ▽=0	4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± 0.13 ± 0.1 1 PLACE ± 0.25 ± --- ANGULAR ±1/2°	MM/IN DRAWN BY DATE KSS 1984/09/10 CHECKED BY DATE NP 1984/09/10 APPROVED BY DATE KJA 1984/09/10	---	---	---
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. SEE CHART	DOCUMENT NO. SDA-4094	SHEET NO. 2 OF 14	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

13		12		11		10		9		8		7		6		5		4		3		2		1	
A-4094-NA I02				A-4094-NA50 I				A-4094-NAB I02				A-4094-NAC I02				A-4094-NAJ I02				A-4094-NAL I02					
PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.		
22-05-2021	A-4094-2A I02	22-12-2021	A-4094-2A50 I	22-05-2026	A-4094-2AB I02									22-05-3038	A-4094-2AJ I02	22-05-2027	A-4094-2AL I02								
22-05-2031	A-4094-3A I02	22-12-2031	A-4094-3A50 I	22-05-2036	A-4094-3AB I02									22-05-3038	A-4094-3AJ I02	22-05-2037	A-4094-3AL I02								
22-05-2041	A-4094-4A I02	22-12-2041	A-4094-4A50 I	22-05-2046	A-4094-4AB I02									22-05-3048	A-4094-4AJ I02	22-05-2047	A-4094-4AL I02								
22-05-2051	A-4094-5A I02	22-12-2051	A-4094-5A50 I	22-05-2056	A-4094-5AB I02									22-05-3058	A-4094-5AJ I02	22-05-2057	A-4094-5AL I02								
22-05-2061	A-4094-6A I02	22-12-2061	A-4094-6A50 I	22-05-2066	A-4094-6AB I02									22-05-3068	A-4094-6AJ I02	22-05-2067	A-4094-6AL I02								
22-05-2071	A-4094-7A I02	22-12-2071	A-4094-7A50 I	22-05-2076	A-4094-7AB I02									22-05-3078	A-4094-7AJ I02	22-05-2077	A-4094-7AL I02								
22-05-2081	A-4094-8A I02	22-12-2081	A-4094-8A50 I	22-05-2086	A-4094-8AB I02									22-05-3088	A-4094-8AJ I02	22-05-2087	A-4094-8AL I02								
22-05-2091	A-4094-9A I02	22-12-2091	A-4094-9A50 I	22-05-2096	A-4094-9AB I02									22-05-3098	A-4094-9AJ I02	22-05-2097	A-4094-9AL I02								
22-05-2101	A-4094-10A I02	22-12-2101	A-4094-10A50 I	22-05-2106	A-4094-10AB I02									22-05-3108	A-4094-10AJ I02	22-05-2107	A-4094-10AL I02								
22-05-2111	A-4094-11A I02	22-12-2111	A-4094-11A50 I	22-05-2116	A-4094-11AB I02									22-05-3118	A-4094-11AJ I02	22-05-2117	A-4094-11AL I02								
22-05-2121	A-4094-12A I02	22-12-2121	A-4094-12A50 I	22-05-2126	A-4094-12AB I02									22-05-3128	A-4094-12AJ I02	22-05-2127	A-4094-12AL I02								
22-05-2131	A-4094-13A I02	22-12-2131	A-4094-13A50 I	22-05-2136	A-4094-13AB I02									22-05-3138	A-4094-13AJ I02	22-05-2137	A-4094-13AL I02								
22-05-2141	A-4094-14A I02	22-12-2141	A-4094-14A50 I	22-05-2146	A-4094-14AB I02									22-05-3148	A-4094-14AJ I02	22-05-2147	A-4094-14AL I02								
22-05-2151	A-4094-15A I02	22-12-2151	A-4094-15A50 I	22-05-2156	A-4094-15AB I02									22-05-3158	A-4094-15AJ I02	22-05-2157	A-4094-15AL I02								
22-05-2161	A-4094-16A I02	22-12-2161	A-4094-16A50 I	22-05-2166	A-4094-16AB I02									22-05-3168	A-4094-16AJ I02	22-05-2167	A-4094-16AL I02								
22-05-2171	A-4094-17A I02	22-12-2171	A-4094-17A50 I	22-05-2176	A-4094-17AB I02									22-05-3178	A-4094-17AJ I02	22-05-2177	A-4094-17AL I02								
22-05-2181	A-4094-18A I02	22-12-2181	A-4094-18A50 I	22-05-2186	A-4094-18AB I02									22-05-3188	A-4094-18AJ I02	22-05-2187	A-4094-18AL I02								
22-05-2191	A-4094-19A I02	22-12-2191	A-4094-19A50 I	22-05-2196	A-4094-19AB I02									22-05-3198	A-4094-19AJ I02	22-05-2197	A-4094-19AL I02								
22-05-2201	A-4094-20A I02	22-12-2201	A-4094-20A50 I	22-05-2206	A-4094-20AB I02									22-05-3208	A-4094-20AJ I02	22-05-2207	A-4094-20AL I02								
22-05-2211	A-4094-21A I02	22-12-2211	A-4094-21A50 I	22-05-2216	A-4094-21AB I02									22-05-3218	A-4094-21AJ I02	22-05-2217	A-4094-21AL I02								
22-05-2221	A-4094-22A I02	22-12-2221	A-4094-22A50 I	22-05-2226	A-4094-22AB I02									22-05-3228	A-4094-22AJ I02	22-05-2227	A-4094-22AL I02								
22-05-2231	A-4094-23A I02	22-12-2231	A-4094-23A50 I	22-05-2236	A-4094-23AB I02									22-05-3238	A-4094-23AJ I02	22-05-2237	A-4094-23AL I02								
22-05-2241	A-4094-24A I02	22-12-2241	A-4094-24A50 I	22-05-2246	A-4094-24AB I02									22-05-3248	A-4094-24AJ I02	22-05-2247	A-4094-24AL I02								
22-05-2251	A-4094-25A I02	22-12-2251	A-4094-25A50 I	22-05-2256	A-4094-25AB I02									22-05-3258	A-4094-25AJ I02	22-05-2257	A-4094-25AL I02								
22-05-2261	A-4094-26A I02	22-12-2261	A-4094-26A50 I	22-05-2266	A-4094-26AB I02									22-05-3268	A-4094-26AJ I02	22-05-2267	A-4094-26AL I02								
22-05-2271	A-4094-27A I02	22-12-2271	A-4094-27A50 I	22-05-2276	A-4094-27AB I02									22-05-3278	A-4094-27AJ I02	22-05-2277	A-4094-27AL I02								
22-05-2281	A-4094-28A I02	22-12-2281	A-4094-28A50 I	22-05-2286	A-4094-28AB I02									22-05-3288	A-4094-28AJ I02	22-05-2287	A-4094-28AL I02								

UPDATE TITLE BLOCK EC NO. UCP2005-2329 DRAWN BY 2005/07/26 CHKD BY CHKCS/SH/01 APPR BY FSW/TH 2005/07/27	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr><td>4 PLACES</td><td>±</td><td>---</td><td>±</td><td>---</td></tr> <tr><td>3 PLACES</td><td>±</td><td>---</td><td>±</td><td>---</td></tr> <tr><td>2 PLACES</td><td>±</td><td>---</td><td>±</td><td>---</td></tr> <tr><td>1 PLACE</td><td>±</td><td>---</td><td>±</td><td>---</td></tr> </table>	4 PLACES	±	---	±	---	3 PLACES	±	---	±	---	2 PLACES	±	---	±	---	1 PLACE	±	---	±	---	DIMENSION STYLE MM/IN	SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
	4 PLACES	±	---	±	---																					
	3 PLACES	±	---	±	---																					
	2 PLACES	±	---	±	---																					
1 PLACE	±	---	±	---																						
DRAWN BY KSS CHECKED BY NP APPROVED BY KJA	DATE 1984/09/10 DATE 1984/09/10 DATE 1984/09/10	TITLE WAFER ASSY FLAT MINI KK (4030 WITH BENT PINS) 4094 SERIES DRAWING	MOLEX INCORPORATED	MATERIAL NO. SEE CHART SIZE C	DOCUMENT NO. SDA-4094	SHEET NO. 4 OF 14																				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS																										
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																										

tb_frame_C_P_ME_T
Rev. D 2004/04/02