

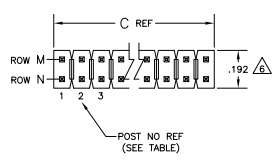


REV	DATE	DESCRIPTION	BY	APP
AD 00				
P2		REVISED PER ECO-11-004820	11MR11	RK HMR

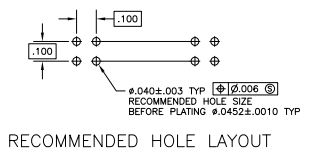

- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- POINT OF MEASUREMENT FOR PLATING THICKNESS.
- OBsolete PART NUMBER.
- RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- FOR 2 POSITION PART ONLY, THE NOTED DIMENSION IS .184
- $\varnothing .020 \text{ (M)}$ FOR KINKED TAILS
- OBsolete PARTS: OBsolete CIS STREAMLINING PER D.RENAUD/D.SINISI

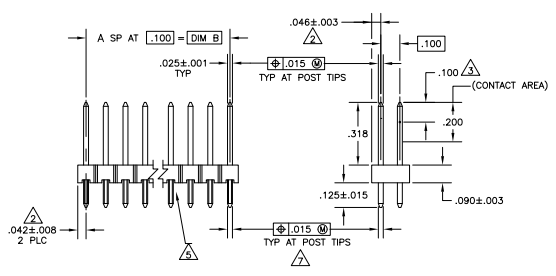

	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
OBsolete	3.284	3.200	32	66	2-104433-4
	1.784	1.700	17	36	2-104433-3
	3.484	3.400	34	70	2-104433-2
	2.184	2.100	21	44	2-104433-1
	3.984	3.900	39	80	2-104433-0
OBsolete	2.984	2.900	29	60	1-104433-9
	2.484	2.400	24	50	1-104433-8
	1.984	1.900	19	40	1-104433-7
	1.684	1.600	16	34	1-104433-6
OBsolete	1.484	1.400	14	30	1-104433-5
	1.384	1.300	13	28	1-104433-4
	1.284	1.200	12	26	1-104433-3
	1.184	1.100	11	24	1-104433-2
OBsolete	1.084	1.000	10	22	1-104433-1
	.984	.900	9	20	1-104433-0
OBsolete	.884	.800	8	18	1-104433-9
	.784	.700	7	16	1-104433-8
OBsolete	.684	.600	6	14	1-104433-7
	.584	.500	5	12	1-104433-6
	.484	.400	4	10	1-104433-5
	.384	.300	3	8	1-104433-4
	.284	.200	2	6	1-104433-3
	.184	.100	1	4	1-104433-2
	.084	---	---	2	1-104433-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

INCHES	MM	SCALE	DATE
1" = 1"	1:1	ASSEMBLY	11/11/11

TE Connectivity
 TE Connectivity
 HEADER ASSY, MOD II,
 BREAKAWAY, DEL ROW, 100X.100 C
 VERT. .025 SQ POSTS, WITH RETENTION FEATURE

SIZE: 4.1
 SHEET: 1 OF 1
 P2