



THIS DRAWING IS UNAPPROVED FOR PUBLICATION
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD	00	REVISED PER EDD-11-004917			

- △ POINT OF MEASUREMENT FOR PLATING THICKNESS
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 3. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- △ FINISH: POSTS: .00030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .00050 NICKEL
- △ FINISH: POSTS: .00030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .00050 NICKEL
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

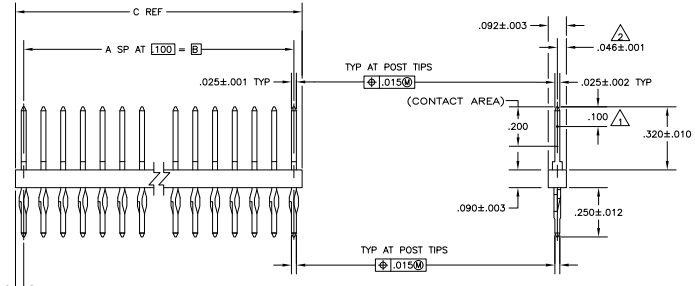

RECOMMENDED HOLE LAYOUT

PLATING	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
△ OBSOLETE	.284	.200	2	3	9-103336-0
△ OBSOLETE	.684	.600	6	7	8-103336-9
△ OBSOLETE	.484	.400	4	5	8-103336-8
△ OBSOLETE	.584	.500	5	6	8-103336-7
△ OBSOLETE	.384	.300	3	4	8-103336-6
△ OBSOLETE	.084	0	0	1	8-103336-5
△	.184	.100	1	2	8-103336-4
△	3.984	3.900	39	40	8-103336-3
△	3.584	3.500	35	36	7-103336-9
△ OBSOLETE	3.184	3.100	31	32	7-103336-5
△ OBSOLETE	2.984	2.900	29	30	7-103336-3
△ OBSOLETE	2.484	2.400	24	25	6-103336-8
△ OBSOLETE	1.984	1.900	19	20	6-103336-3
△ OBSOLETE	1.884	1.800	18	19	6-103336-2
△ OBSOLETE	1.784	1.700	17	18	6-103336-1
△ OBSOLETE	1.684	1.600	16	17	6-103336-0
△	1.584	1.500	15	16	5-103336-9
△	1.484	1.400	14	15	5-103336-8
△ OBSOLETE	1.384	1.300	13	14	5-103336-7
△	1.284	1.200	12	13	5-103336-6
△	1.184	1.100	11	12	5-103336-5
△	1.084	1.000	10	11	5-103336-4
△ OBSOLETE	.984	.900	9	10	5-103336-3
△ OBSOLETE	.884	.800	8	9	5-103336-2
△ OBSOLETE	.784	.700	7	8	5-103336-1

△	.284	.200	2	3	4-103336-0
△	.684	.600	6	7	3-103336-9
△	.484	.400	4	5	3-103336-8
△	.584	.500	5	6	3-103336-7
△	.384	.300	3	4	3-103336-6
△ OBSOLETE	.084	0	0	1	3-103336-5
△	.184	.100	1	2	3-103336-4
△	3.984	3.900	39	40	3-103336-3
△ OBSOLETE	3.584	3.500	35	36	3-103336-2
△ OBSOLETE	3.184	3.100	31	32	3-103336-1
△ OBSOLETE	2.984	2.900	29	30	2-103336-3
△ OBSOLETE	2.984	2.900	29	30	2-103336-2
△ OBSOLETE	2.884	2.800	28	29	2-103336-2
△ OBSOLETE	2.784	2.700	27	28	2-103336-1
△ OBSOLETE	2.684	2.600	26	27	2-103336-0
△ OBSOLETE	2.584	2.500	25	26	1-103336-9
△ OBSOLETE	2.484	2.400	24	25	1-103336-8
△ OBSOLETE	2.384	2.300	23	24	1-103336-7
△ OBSOLETE	2.284	2.200	22	23	1-103336-6
△ OBSOLETE	2.184	2.100	21	22	1-103336-5
△ OBSOLETE	2.084	2.000	20	21	1-103336-4
△	1.984	1.900	19	20	1-103336-3
△ OBSOLETE	1.884	1.800	18	19	1-103336-2
△ OBSOLETE	1.784	1.700	17	18	1-103336-1
△ OBSOLETE	1.684	1.600	16	17	1-103336-0
△	1.584	1.500	15	16	103336-9
△	1.484	1.400	14	15	103336-8
△	1.384	1.300	13	14	103336-7
△	1.284	1.200	12	13	103336-6
△	1.184	1.100	11	12	103336-5
△	1.084	1.000	10	11	103336-4
△ OBSOLETE	.984	.900	9	10	103336-3
△ OBSOLETE	.884	.800	8	9	103336-2
△ OBSOLETE	.784	.700	7	8	103336-1

THIS DRAWING IS A CONTROLLED DOCUMENT. THE MIDDLE COPY IS THE MASTER COPY. THE ORIGINAL IS THE MASTER COPY.

UNSHROUDED, COMPLIANT PIN, SINGLE ROW, 100 X 1000/A, WITH 625 SQ POSTS

SIZE: 100 X 1000/A, WITH 625 SQ POSTS

DATE: 10/07/79

REVISED PER EDD-11-004917

103336-3

CUSTOMER DRAWING

DATE: 4.1

SHEET: 1 OF 1

APP: HX