
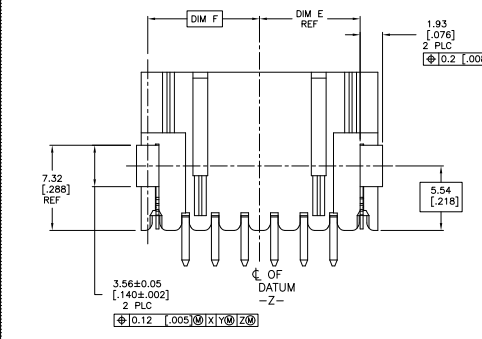
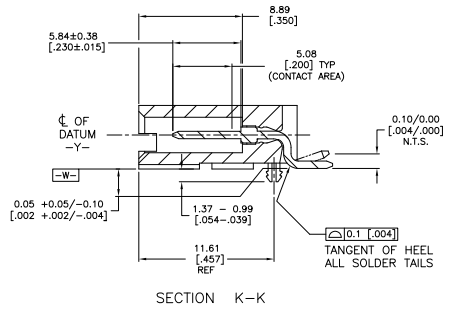
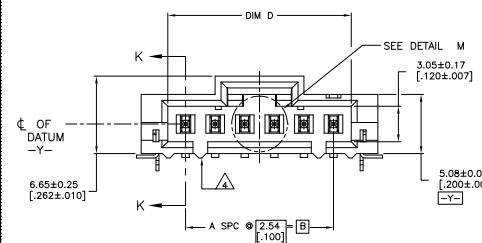
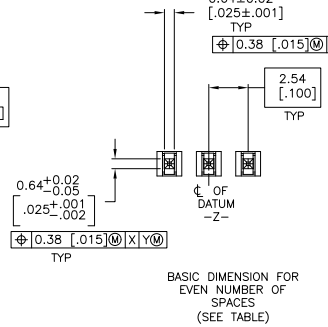



THIS DRAWING IS UNPUBLISHED
 UNLESS OTHERWISE SPECIFIED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD	00	REVISED PER ESD-11-004917			

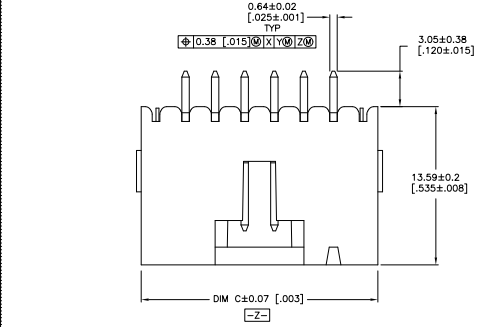

- △ HOUSING: HIGH TEMPERATURE THERMOPLASTIC, COLOR-BLACK. POST: BRASS.
- △ POST: 0.000762 [.000030] MIN GOLD ON THE CONTACT AREA. 0.00254-0.00508 [.000100-.000200] MIN MATTE TIN-LEAD ON THE SOLDER LEADS, ALL OVER 0.00127 [.000050] NICKEL.
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY THE CUSTOMER.
- △ TWO POLARIZATION SLOTS ON ASSEMBLIES WITH FOUR OR MORE POSITIONS.
- △ POST: 0.000762 [.000030] MIN GOLD ON THE CONTACT AREA. 0.00254-0.00508 [.000100-.000200] MIN MATTE TIN ON THE SOLDER LEADS, ALL OVER 0.00127 [.000050] NICKEL.

SEE TABLE ON SHEET #3


THIS DRAWING IS A CONTROLLED DOCUMENT.		REV	DATE	DESCRIPTION	BY	CHK	APP
UNLESS OTHERWISE SPECIFIED	ALL DIMENSIONS ARE IN INCHES	AD	00	REVISED PER ESD-11-004917			

UNLESS OTHERWISE SPECIFIED	UNLESS OTHERWISE SPECIFIED	UNLESS OTHERWISE SPECIFIED	UNLESS OTHERWISE SPECIFIED
UNLESS OTHERWISE SPECIFIED	UNLESS OTHERWISE SPECIFIED	UNLESS OTHERWISE SPECIFIED	UNLESS OTHERWISE SPECIFIED


UNLESS OTHERWISE SPECIFIED	UNLESS OTHERWISE SPECIFIED	UNLESS OTHERWISE SPECIFIED	UNLESS OTHERWISE SPECIFIED
UNLESS OTHERWISE SPECIFIED	UNLESS OTHERWISE SPECIFIED	UNLESS OTHERWISE SPECIFIED	UNLESS OTHERWISE SPECIFIED

THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	APP
AD 00		SEE SHEET 1		

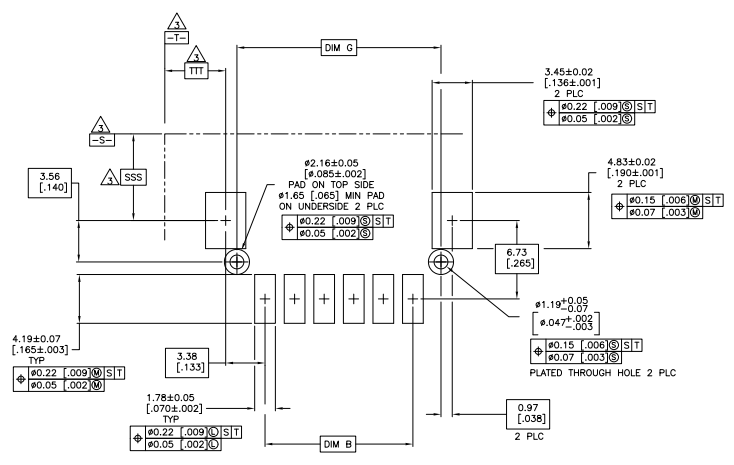


RECOMMENDED PC BOARD LAYOUT




POLARIZATION SLOT FOR TWO POSITION



POLARIZING SLOT FOR THREE POSITION



147278-1



147278-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV. 00	DATE	10/11/00	BY	TE Connectivity
DRAWN BY: [Signature]		DESIGNED BY: [Signature]	DATE	10/11/00	BY	TE Connectivity
CHECKED BY: [Signature]		APPROVED BY: [Signature]	DATE	10/11/00	BY	TE Connectivity
PART NUMBER: 108-25034		DESCRIPTION: HEADER ASSEMBLY, LATCHING, RIGHT ANGLE SURFACE MOUNT, WTE, AMPHIBIOUS	DATE	10/11/00	BY	TE Connectivity
DRAWING NO: A100779		REV. 00	DATE	10/11/00	BY	TE Connectivity
CUSTOMER DRAWING		DATE	10/11/00	BY	TE Connectivity	REV. 00

△	88	65.79 [2.590]	33.73 [1.328]	32.77 [1.290]	64.01 [2.520]	68.58 [2.700]	60.96 [2.400]	24	25	2-147323-4
△	88	63.25 [2.490]	32.46 [1.278]	31.50 [1.240]	61.47 [2.420]	66.04 [2.600]	58.42 [2.300]	23	24	2-147323-3
△	88	60.71 [2.390]	31.19 [1.228]	30.23 [1.190]	58.93 [2.320]	63.50 [2.500]	55.88 [2.200]	22	23	2-147323-2
△	88	58.17 [2.290]	29.92 [1.178]	28.96 [1.140]	56.39 [2.220]	60.96 [2.400]	53.34 [2.100]	21	22	2-147323-1
△	88	55.63 [2.190]	28.65 [1.128]	27.69 [1.090]	53.85 [2.120]	58.42 [2.300]	50.80 [2.000]	20	21	2-147323-0
△	72	53.09 [2.090]	27.38 [1.078]	26.42 [1.040]	51.31 [2.020]	55.88 [2.200]	48.26 [1.900]	19	20	1-147323-9
△	72	50.55 [1.990]	26.11 [1.028]	25.15 [1.000]	48.77 [1.920]	53.34 [2.100]	45.72 [1.800]	18	19	1-147323-8
△	72	48.01 [1.890]	24.84 [1.078]	23.88 [1.040]	46.23 [1.820]	50.80 [2.000]	43.18 [1.700]	17	18	1-147323-7
△	72	45.47 [1.790]	23.57 [1.028]	22.61 [1.000]	43.69 [1.720]	48.26 [1.900]	40.64 [1.600]	16	17	1-147323-6
△	72	42.93 [1.690]	22.30 [1.028]	21.34 [1.000]	41.15 [1.620]	45.72 [1.800]	38.10 [1.500]	15	16	1-147323-5
△	72	40.39 [1.590]	21.03 [1.028]	20.07 [1.000]	38.61 [1.520]	43.18 [1.700]	35.56 [1.400]	14	15	1-147323-4
△	56	37.85 [1.490]	19.76 [1.028]	18.80 [1.000]	36.07 [1.420]	40.64 [1.600]	33.02 [1.300]	13	14	1-147323-3
△	56	35.31 [1.390]	18.49 [1.028]	17.53 [1.000]	33.53 [1.320]	38.10 [1.500]	30.48 [1.200]	12	13	1-147323-2
△	56	32.77 [1.290]	17.22 [1.028]	16.26 [1.000]	30.99 [1.220]	35.56 [1.400]	27.94 [1.100]	11	12	1-147323-1
△	56	30.23 [1.190]	15.95 [1.028]	14.99 [1.000]	28.45 [1.120]	33.02 [1.300]	25.40 [1.000]	10	11	1-147323-0
△	44	27.69 [1.090]	14.68 [1.028]	13.72 [1.000]	25.91 [1.020]	30.48 [1.200]	22.86 [1.000]	9	10	147323-9
△	44	25.15 [1.000]	13.41 [1.028]	12.45 [1.000]	23.37 [1.020]	27.94 [1.100]	20.32 [1.000]	8	9	147323-8
△	44	22.61 [1.000]	12.14 [1.028]	11.18 [1.000]	20.83 [1.020]	25.40 [1.000]	17.78 [1.000]	7	8	147323-7
△	44	20.07 [1.000]	10.87 [1.028]	9.91 [1.000]	18.29 [1.020]	22.86 [1.000]	15.24 [1.000]	6	7	147323-6
△	44	17.53 [1.000]	9.60 [1.028]	8.64 [1.000]	15.75 [1.020]	20.32 [1.000]	12.70 [1.000]	5	6	147323-5
△	32	14.99 [1.000]	8.33 [1.028]	7.37 [1.000]	13.21 [1.020]	17.78 [1.000]	10.16 [1.000]	4	5	147323-4
△	24	12.45 [1.000]	7.06 [1.028]	6.10 [1.000]	10.67 [1.020]	15.24 [1.000]	7.62 [1.000]	3	4	147323-3
△	24	9.91 [1.000]	5.79 [1.028]	4.83 [1.000]	8.13 [1.020]	12.70 [1.000]	5.08 [1.000]	2	3	147323-2
△	24	7.37 [1.000]	4.52 [1.028]	3.56 [1.000]	5.59 [1.020]	10.16 [1.000]	2.54 [1.000]	1	2	147323-1
PLATING	EAI 481 TAPE WIDTH mm	G	F	E	D	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. SHEET 1 OF 1. DATE: 10/20/11. BY: [Signature].

TE Connectivity
 108-25034
 HEADER ASSEMBLY, LATCHING, RIGHT ANGLE SURFACE MOUNT, WTE, AMPHOBY

DATE: 10/20/11
 DRAWING NO: 108-25034
 CUSTOMER DRAWING

THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	APP
AD	00			
SEE SHEET 1				

△	88	65.79 [2.590]	33.73 [1.328]	32.77 [1.290]	64.01 [2.520]	68.58 [2.700]	60.96 [2.400]	24	25	7-147323-4
△	88	63.25 [2.490]	32.46 [1.278]	31.50 [1.240]	61.47 [2.420]	66.04 [2.600]	58.42 [2.300]	23	24	7-147323-3
△	88	60.71 [2.390]	31.19 [1.228]	30.23 [1.190]	58.93 [2.320]	63.50 [2.500]	55.88 [2.200]	22	23	7-147323-2
△	88	58.17 [2.290]	29.92 [1.178]	28.96 [1.140]	56.39 [2.220]	60.96 [2.400]	53.34 [2.100]	21	22	7-147323-1
△	88	55.63 [2.190]	28.65 [1.128]	27.69 [1.090]	53.85 [2.120]	58.42 [2.300]	50.80 [2.000]	20	21	7-147323-0
△	72	53.09 [2.090]	27.38 [1.078]	26.42 [1.040]	51.31 [2.020]	55.88 [2.200]	48.26 [1.900]	19	20	6-147323-9
△	72	50.55 [1.990]	26.11 [1.028]	25.15 [.990]	48.77 [1.920]	53.34 [2.100]	45.72 [1.800]	18	19	6-147323-8
△	72	48.01 [1.890]	24.84 [.978]	23.88 [.940]	46.23 [1.820]	50.80 [2.000]	43.18 [1.700]	17	18	6-147323-7
△	72	45.47 [1.790]	23.57 [.928]	22.61 [.890]	43.69 [1.720]	48.26 [1.900]	40.64 [1.600]	16	17	6-147323-6
△	72	42.93 [1.690]	22.30 [.878]	21.34 [.840]	41.15 [1.620]	45.72 [1.800]	38.10 [1.500]	15	16	6-147323-5
△	72	40.39 [1.590]	21.03 [.828]	20.07 [.790]	38.61 [1.520]	43.18 [1.700]	35.56 [1.400]	14	15	6-147323-4
△	56	37.85 [1.490]	19.76 [.778]	18.80 [.740]	36.07 [1.420]	40.64 [1.600]	33.02 [1.300]	13	14	6-147323-3
△	56	35.31 [1.390]	18.49 [.728]	17.53 [.690]	33.53 [1.320]	38.10 [1.500]	30.48 [1.200]	12	13	6-147323-2
△	56	32.77 [1.290]	17.22 [.678]	16.26 [.640]	30.99 [1.220]	35.56 [1.400]	27.94 [1.100]	11	12	6-147323-1
△	56	30.23 [1.190]	15.95 [.628]	14.99 [.590]	28.45 [1.120]	33.02 [1.300]	25.40 [1.000]	10	11	6-147323-0
△	44	27.69 [1.090]	14.68 [.578]	13.72 [.540]	25.91 [1.020]	30.48 [1.200]	22.86 [.900]	9	10	5-147323-9
△	44	25.15 [.990]	13.41 [.528]	12.45 [.490]	23.37 [.920]	27.94 [1.100]	20.32 [.800]	8	9	5-147323-8
△	44	22.61 [.890]	12.14 [.478]	11.18 [.440]	20.83 [.820]	25.40 [1.000]	17.78 [.700]	7	8	5-147323-7
△	44	20.07 [.790]	10.87 [.428]	9.91 [.390]	18.29 [.720]	22.86 [.900]	15.24 [.600]	6	7	5-147323-6
△	44	17.53 [.690]	9.60 [.378]	8.64 [.340]	15.75 [.620]	20.32 [.800]	12.70 [.500]	5	6	5-147323-5
△	32	14.99 [.590]	8.33 [.328]	7.37 [.290]	13.21 [.520]	17.78 [.700]	10.16 [.400]	4	5	5-147323-4
△	24	12.45 [.490]	7.06 [.278]	6.10 [.240]	10.67 [.420]	15.24 [.600]	7.62 [.300]	3	4	5-147323-3
△	24	9.91 [.390]	5.79 [.228]	4.83 [.190]	8.13 [.320]	12.70 [.500]	5.08 [.200]	2	3	5-147323-2
△	24	7.37 [.290]	4.52 [.178]	3.56 [.140]	5.59 [.220]	10.16 [.400]	2.54 [.100]	1	2	5-147323-1
PLATING	EAI 481 TAPE WIDTH mm	G	F	E	D	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE: 10/20/09		BY: [Signature]	
DRAWN BY: [Signature]		CHECKED BY: [Signature]		DATE: 10/20/09	
DESIGNED BY: [Signature]		APPROVED BY: [Signature]		DATE: 10/20/09	
JOB NO: 108-25034		CUSTOMER: [Signature]		DATE: 10/20/09	
DRAWING NO: [Signature]		REV: A1		DATE: 10/20/09	
PART NO: [Signature]		REV: 1:1		DATE: 10/20/09	
DATE: 10/20/09		REV: 4		DATE: 10/20/09	
DATE: 10/20/09		REV: 4		DATE: 10/20/09	
DATE: 10/20/09		REV: 4		DATE: 10/20/09	
DATE: 10/20/09		REV: 4		DATE: 10/20/09	