THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,1998.
© COPYRIGHT 1998 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD
A	SEE PCN E000-0681-96	26.06.96	Pawlik	-
B	SEE PCN E000-1328-96	05 NOV 96	Pawlik	-
C	SEE PCN E000-0265-97-1	03 MAR 97	Pawlik	-
C1	SEE PCN E000-0355-97-2	25 MAR 97	Pawlik	-
C2	SEE PCN E000-1328-97-1	25 NOV 97	Hentges	-
C3	SEE PCN E000-1328-97-1	09 DEC 97	Hentges	-
C4	SEE PCN E000-1406-97-3	18 DEZ 97	Pawlik	-
C5	SEE PCN E000-0366-98-135	12 JUN 98	WWWE	-
D	SEE PCN E000-0265-99-2	05 FEB 99	Reh	-
D1	SEE PCN E000-1627-99-1	26 AUG 99	Ho.	-
D2	SEE PCN E000-1762-99-1	06 SEP 99	Ho.	-
E	SEE PCN E000-1647-00	19 JULY 00	GRU	-
E1	SEE PCN E900-1841-00	15 AUG 00	A.RI	-
F	SEE PCN E900-3397-01	15 NOV 01	Grl.	-
F1	SEE PCN E000-0098-02	12 FEB 02	H.M.	T.K.
F2	SEE PCN E000-2080-02	25 JUN 02	A.RI	HSCH
F3	SEE PCN E940-0448-04	26 FEB 04	HSCH	VB
G	SEE PCN E940-1352-04	22-JUN-04	HSCH	VB
H	SEE PCN E940-0227-05	31-JAN-05	HSCH	VB

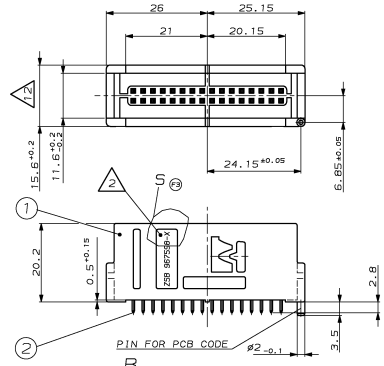







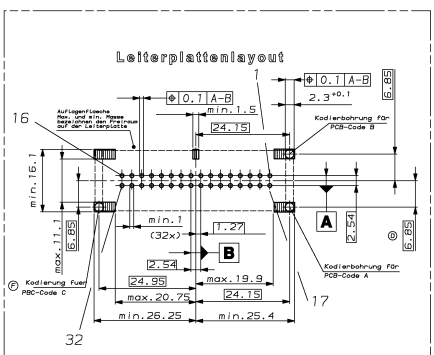

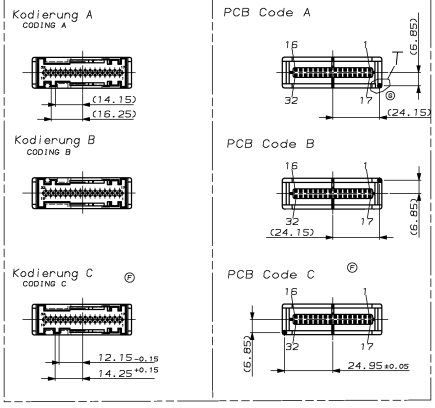

Bemerkungen
NOTES

- P3 △1 AMP-Logo or tyco-Logo / AMP-LOGO OR tyco-LOGO
- △2 Bestell-Nummer / ORDER-NUMBER
- △3 Werkzeugaenderungsindex fuer Gehaeuse / REVISIONS-NUMBER FOR HOUSING
- △4 Werkstoffkennzeichnung / MATERIAL MARKING
- △5 –
- △6 Nestmarkierung / CAVITY MARKING
- △7 Produktions-Datum / PRODUCTION-DATE
- △8 Verpackung in Karton / PACKAGING IN CARTON
- △9 Verpackung in Siemens-KLT / PACKAGING IN SIEMENS-KLT
- △10 Verarbeitungsspez. nur für General Motors, APPLICATION SPEC. ONLY FOR GENERAL MOTORS; 114-18174-1
  Allgemeine Verarbeitungsspez.; UNIVERSAL APPLICATION SPEC.; 114-18174-0
- △11 Produktspez. nur für General Motors; PRODUCT SPEC. ONLY FOR GENERAL MOTORS; 108-18547-1
  Allgemeine Produktspez.; UNIVERSAL PRODUCT SPEC.; 108-18547-0
- G △12 Bis max. 16.2 und min. 15.2 aufgrund Verzug zulaessig / DIM. MAX.16.2 AND MIN. 15.2 PERMITTED IN FACT OF WARPAGE

H F △3	–	1-967598-5 CODING C	B	C	32	CuSn6	2-4µm PRE TIN PLATED	AMPMODU II PIN 0.63	2
					1	PA 66	BLACK	PIN HEADER , 32 POS.	1
H F △3	–	0-967598-5 CODING C	B	C	32	CuSn6	2-4µm PRE TIN PLATED	AMPMODU II PIN 0.63	2
					1	PA 66	BLACK	PIN HEADER , 32 POS.	1
H △3	–	1-967598-4 CODING B	C	B	32	CuSn6	2-4µm PRE TIN PLATED	AMPMODU II PIN 0.63	2
					1	PA 66	BLUE	PIN HEADER , 32 POS.	1
E1 NICHT VERFUEGBAR -OBSOLETE-	–	1-967598-3 CODING A	B	B	32	CuSn6	2-4µm PRE TIN PLATED	AMPMODU II PIN 0.63	2
					1	PA 66	GREY	PIN HEADER , 32 POS.	1
NICHT VERFUEGBAR -OBSOLETE-	–	1-967598-2 CODING B	D	A	32	CuSn6	2-4µm PRE TIN PLATED	AMPMODU II PIN 0.63	2
					1	PA 66	BLUE	PIN HEADER , 32 POS.	1
G △3	–	1-967598-1 CODING A	E	A	32	CuSn6	2-4µm PRE TIN PLATED	AMPMODU II PIN 0.63	2
					1	PA 66	GREY	PIN HEADER , 32 POS.	1
H △3	–	0-967598-4 CODING B	C	B	32	CuSn6	2-4µm PRE TIN PLATED	AMPMODU II PIN 0.63	2
					1	PA 66	BLUE	PIN HEADER , 32 POS.	1
E1 NICHT VERFUEGBAR -OBSOLETE-	–	0-967598-3 CODING B	B	B	32	CuSn6	2-4µm PRE TIN PLATED	AMPMODU II PIN 0.63	2
					1	PA 66	GREY	PIN HEADER , 32 POS.	1
NICHT VERFUEGBAR -OBSOLETE-	–	0-967598-2 CODING B	D	A	32	CuSn6	2-4µm PRE TIN PLATED	AMPMODU II PIN 0.63	2
					1	PA 66	BLUE	PIN HEADER , 32 POS.	1
G △3	–	0-967598-1 CODING A	E	A	32	CuSn6	2-4µm PRE TIN PLATED	AMPMODU II PIN 0.63	2
					1	PA 66	GREY	PIN HEADER , 32 POS.	1
CUSTOMER PART NO	AMP PART NO	REV.	PCB Code	PCS.	MATERIAL	SURFACE COLOR		DESCRIPTION	ITEM NO

32POS. CONNECTOR CONTAINS:
32pol. Steckverbinder besteht aus .

X-967598-1 PINHEADER, CODING A, PCB CODE A / Stiftleiste, Kodierung A, PCB-Code A
X-967598-2 PINHEADER, CODING B, PCB CODE A / Stiftleiste, Kodierung B, PCB-Code A
X-967598-3 PINHEADER, CODING A, PCB CODE B / Stiftleiste, Kodierung A, PCB-Code B
X-967598-4 PINHEADER, CODING B, PCB CODE B / Stiftleiste, Kodierung B, PCB-Code B

967597-1 COVER WITH LEVER, CODING A / Abdeckk. m. Hebel, Kodierung A
967597-2 COVER WITH LEVER, CODING B / Abdeckk. m. Hebel, Kodierung B
OR/oder
929053-1 COVER WITH LEVER, CODING A / Abdeckk. m. Hebel, Kodierung A
929053-2 COVER WITH LEVER, CODING B / Abdeckk. m. Hebel, Kodierung B

968265-1 MQS SOCKET HSG., MQS-Buchsengehäuse

AMP 4005 REV 27AM98

F3 HIGH TEMPERATURE VERSION
SEE PN 1452368
Hochtemperatur Ausführung
siehe PN 1452368

–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–
CUSTOMER PART NO	AMP PART NO	REV.	PCS.	MATERIAL	SURFACE COLOR		DESCRIPTION		ITEM NO		

DIMENSIONING AND TOLERANCING ACCORDING TO ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH: SEE TABLE/siehe Tabelle
MATERIAL: SEE TABLE/siehe Tabelle

DRN: C.Pawlik 24 JAN 96
CHK: J.Kunze 24 JAN 96
APVD:
PRODUCT SPEC: –
APPLICATION SPEC: –
WEIGHT: 8.4g

tyco Electronics AMP GmbH
D - 64625 Bensheim

NAME: MODU II PIN HEADER , 32 POS.
MODU II Stiftwanne , 32 pol.

SIZE A1 | CAGE CODE 00779 | DRAWING NO 967598 | REVISION 1 | SHEET 1 OF 1

CUSTOMER DRAWING /KUNDENZEICHNUNG

Downloaded from Elcodis.com electronic components distributor