



THIS DRAWING IS UNPUBLISHED
 RELEASED FOR PUBLICATION
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 39					
1					
2					
3					
4					
5					
6					
7					
8					

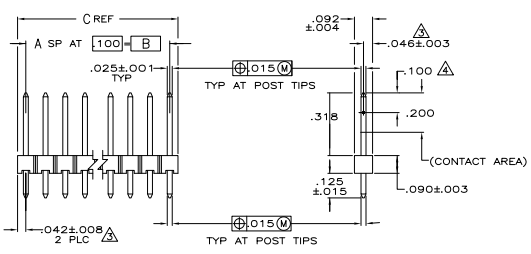

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
 - POINT OF MEASUREMENT FOR PLATING THICKNESS
 - OBsolete PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



RECOMMENDED HOLE LAYOUT

REV	DATE	DESCRIPTION	BY	CHK	APP
39					
40					
41					
42					
43					
44					
45					
46					
47					
48					
49					
50					
51					
52					
53					
54					
55					
56					
57					
58					
59					
60					
61					
62					

THIS DRAWING IS A CONTROLLED DOCUMENT.

DATE: 10-12-87
 BY: CLARK
 BY: BUCKNER
 BY: PFEIFER

REVISIONS: 10-12-87

DESCRIPTION: HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100

DATE: 10-12-87
 DRAWING NO: A100779
 CUSTOMER DRAWING: G=102972

REVISED PER: ECD-11-004587

DATE: 11MAR11
 BY: RCK
 APP: HMR