

4

3

2




1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © copyright by TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	REV	DATE	BY	CHK	APP
J	1				
F	4				

REVISIONS		DATE	BY	APP
DESCRIPTION	REVISION			
REVISED	ECR-08-011696	19MAY08	SF	KB

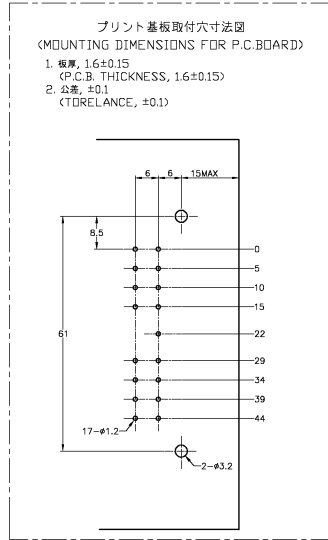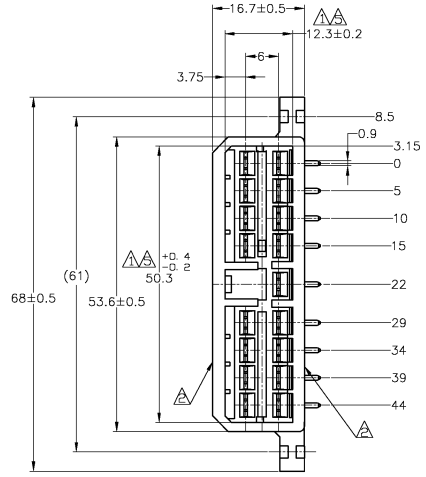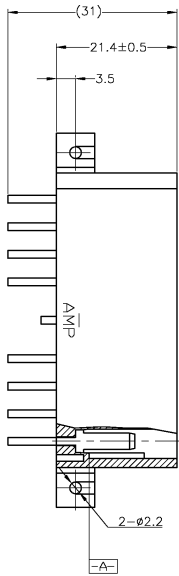

- 注記:
- △ 相手ハウジングと所定の機能を満たしてかみ合できること。
  - △ フードの反りは0.2以内。
  - 3 プリント基板への取付けは、JIS B1115 M3 1種のタッピングネジで締め付けた後はんだ付けする。
  - 4 適用製品規格: 108-5093
  - △ A-A 面より2mmの範囲で測定のこと。
  - 6 相手ハウジングとのかみ合力は、29.4N以下。但し、リセプタクルコンタクトは含まない。



- NOTE:
- △ IN COUPLING WITH THE PLUG HOUSING MATING SATISFIES FUNCTION
  - △ WARPAGE 0.2 MAX.
  - 3 SOLDERING AFTER MOUNTING P.C. BOARD BY 3mmDIA TAPPING SCREW, SPECIFIED IN JIS B1115
  - 4 PRODUCT SPEC NO. 108-5093
  - △ TO BE MEASURED WITHIN 2mm FROM A-A
  - 6 IN COUPLING WITH THE PLUG HOUSING MATING FORCE 29.4N MAX. WITHOUT RECEPTACLE CONTACT

CONTACT FINISH	CONTACT SIDE	COLOR	PART NUMBER	
SELECTIVE-TIN (MATTE)	SELECTIVE GOLD (0.38μm MIN.)	NATURAL	2-5171366-1	
SELECTIVE-TIN (MATTE)	SELECTIVE GOLD (0.76μm MIN.)	NATURAL	1-5171366-1	
OBsolete	TIN-LEAD	SELECTIVE GOLD (0.38μm MIN.)	YELLOW	2-171366-7
	TIN-LEAD	SELECTIVE GOLD (0.38μm MIN.)	GREEN	2-171366-4
	TIN-LEAD	SELECTIVE GOLD (0.38μm MIN.)	NATURAL	2-171366-1
OBsolete	TIN-LEAD	SELECTIVE GOLD (0.76μm MIN.)	GREEN	1-171366-4
	TIN-LEAD	SELECTIVE GOLD (0.76μm MIN.)	NATURAL	1-171366-1
OBsolete	PRE-TIN	PRE-TIN BRASS	GRAY	171366-6
	PRE-TIN		BLUE	171366-5
	PRE-TIN		GREEN	171366-4
	PRE-TIN		BROWN	171366-3
	PRE-TIN		BLACK	171366-2
	PRE-TIN		NATURAL	171366-1
SOLDERING SIDE 半田付け部	CONTACT SIDE 接触部	COLOR 色	PART NUMBER 製品番号	

THIS DRAWING IS A CONTROLLED DOCUMENT

DRW/REV: T. SHIOHARA 31A0097  
 CHK/APP: K. BELTSUI 31A0097  
 PROD/APP: K. BELTSUI 31A0097

TYCO ELECTRONICS CORPORATION  
 Tyco Electronics Corporation  
 Kawasaki, Japan

17P HORIZONTAL TYPE CAP HOUSING  
 MULTI-INTERLOCK CONN.  
 WIRE TO PCB

DATE: 00779  
 DRAWING NO: 171366

CUSTOMER DRAWING/DESENHO DE CLIENTE 2:1 SHEET 1 of 1 REV F.4

TOLERANCE UNLESS OTHERWISE SPECIFIED

0 ~ <math>5</math>	±0.2
5 ~ <math>30</math>	±0.25
30 ~ <math>100</math>	±0.3
100 ~	±0.5

ANGLE: ±3°

MATERIAL: NSG: 66 NYLON  
 CONTACT: BRASS

171366

A