
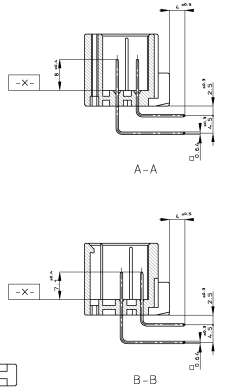


- 1 MUST BE KEPT BETWEEN ① AND 2  
 2 THE MATING PLUG HSE PART NUMBER: 17A516,17A515,17A514  
 3 RECOMMENDED MOUNTING SCREW: 3mm DIA. (MINIMUM) 17MM MAX.  
 PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1175, B1172  
 4 TIGHTENING TORQUE: 4N·m MAX. 1  
 5 APPLICABLE PRODUCT SPEC: NO. 108-5280  
 6 CIRCUIT NUMBER  
 7 POWER CIRCUIT NO. ①~⑥  
 8 SIGNAL CIRCUIT NO. ⑦~⑮  
 9 INDICATED PREFIX AND ID MARKS OF PRODUCT P/N BY COLOR HOT MARK  
 10 P/B SIDE OF GOLD PLATING TAB IS TIN PLATE  
 11 USING "X" REPLACE "-" (P/N MARK)  
 12 EXAMPLE: "100"
- ① 黒色 (Black) ② 白色 (White)  
 ③ 緑色 (Green) ④ 赤色 (Red)  
 ⑤ 黄色 (Yellow) ⑥ 灰色 (Gray)  
 ⑦ 青色 (Blue) ⑧ 紫色 (Purple)  
 ⑨ 透明 (Transparent) ⑩ 不明 (Unknown)
- △ 適用製品規格番号: 108-5280  
 △ 図面番号: 下巻第 2 の 2  
 △ カラーコード  
 △ カバーネット  
 △ P/N: 177609-2 (黒) / 177609-1 (白) / 177609-1 (透明) / 177609-1 (不明)



NO.	DESCRIPTION	REVISION	DATE	BY	CHK	DESCRIPTION
9	BLACK	①②③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲				WHITE
8	BLACK	①②③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲				WHITE
7	BLACK	①②③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲				WHITE
6	WHITE	①②③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲				GRAY
5	WHITE	①②③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲				GRAY
4	WHITE	①②③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲				GRAY
3	BLACK	①②③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲				GRAY
2	WHITE	①②③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲				GRAY
1	WHITE	①②③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲				GRAY
0	WHITE	①②③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲				GRAY
<p>△ P/N MARKING POSITION: ①②③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲</p> <p>△ P/N MARKING POSITION: ①②③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲</p>						

THIS DRAWING IS A CONTROLLED DOCUMENT

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

DATE: 04/10/07 BY: S.F. K.B.

PRODUCT: 64P070 SERIES HYBRID I/O CONN. 64POSITION CAP HOUSING ASSY

REVISION: 1

DATE: 04/10/07 BY: S.F. K.B.

PRODUCT: 64P070 SERIES HYBRID I/O CONN. 64POSITION CAP HOUSING ASSY