
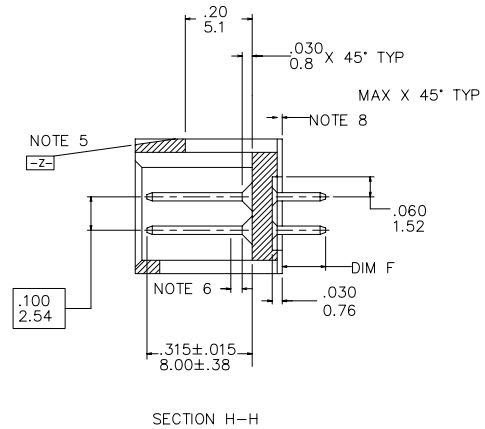
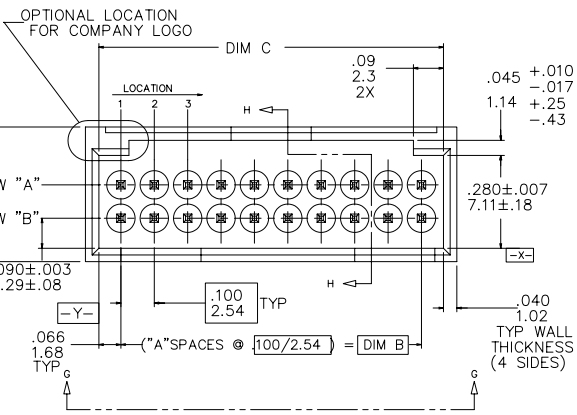



PRODUCT NUMBER
SEE TABLE

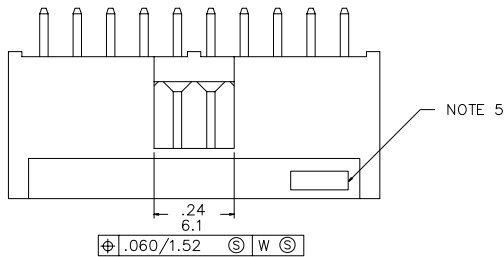

mat'l. code		surface		tolerance		projection		product family	
		ISO 1302 ✓		ISO 406		ISO 1101		HEADER	
ltr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM		title	
B	REDIM	MRC	9/19/90	angles	linear	.XX±.01/.3		STRAIGHT HEADER FOR	
C	M05-0089	MHT	5/26/05	0°±2'		.XXX±.005/.13		ROUND WIRE RECEPTACLE	
D	M07-0116	AGS	2/24/07			.XXXX±.0020/.051		scale 8:1	
		dr	M. CORNMAN	9/18/90		FCI		dwg no	
		enrg	M. LEACH	9/18/90				sheet 1 of 6 size	
		chr	M. LEACH	9/18/90				68666 A3	
		appd	M. LEACH	9/18/90				type Product Customer Drawing	
sheet index	revision sheet	D	D	D	D	D	D		
		1	2	3	4	5	6		

PDM: Rev:D STATUS:Released Printed: Oct 13, 2010

PRODUCT NUMBER
SEE TABLE

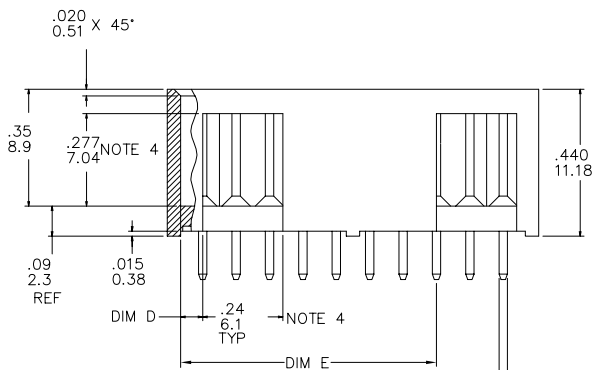

.025 SQUARE		0.64 REF, TYP (BOTH ENDS)	
⊕ .015 / .38 ⌀	Ⓜ	X	Ⓜ
⊕ .006 / .15 ⌀	Ⓜ	X	Ⓜ
		Y	Ⓜ
		Y	Ⓜ

VIEW G-G

NOTES:

1. TERMINAL MAT'L: 3/4 HARD PHOS. BRONZE ALLOY UNS-C51000.
2. TERMINAL PLATING; 30μ"/0.76μ PdNi OVER 50μ"/1.27μ Ni PLATING ON SWAGED TIPS MANUFACTURES OPTION.
3. MOLDING MAT'L; GLASS FILLED POLYESTER, FLAME RETARDANT PER UL-94V-0. COLOR BLACK.
- ④ .020/.51 MAX FLASH AROUND ALL WINDOWS.
- ⑤ COMPANY LOGO MOLDED IN ON DATUM SURFACE -Z- APPROX. AS SHOWN.
- ⑥ .030/.76 MAX FLASH PERMISSIBLE ON THIS END OF PINS.
7. OTHER PLATINGS ARE AVAILABLE ON 68663,68664 AND 68665.
8. .015/.38 MAX FLASH PERMISSIBLE ON THIS END OF PIN
- ⑨ ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
10. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
11. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.

mat'l. code		surface	tolerance	projection	product family
ISO 1302		ISO 1302	ISO 406	ISO 1101	HEADER
ltr	ecn no	dr	date	title	
D				STRAIGHT HEADER FOR	
tolerances unless otherwise specified				INCH/MM	ROUND WIRE RECEPTACLE
angles	linear		.XX±.01/.3	scale 8:1	
0°±2'			.XXX±.005/.13		
			.XXXX±.0020/.051		
dr	M. CORNMAN	9/18/90			sheet 2 of 6 size
enrg	M. LEACH	9/18/90			68666 A3
chr	M. LEACH	9/18/90			
appd	M. LEACH	9/18/90			type Product Customer Drawing
sheet index	revision sheet				

PRODUCT NO		NO.OF		A		DIM B		DIM C		DIM D		DIM E		DIM F		TERMINAL		POL. POS	
NOTE 9	POS	PINS	SPACES	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	PLATING	ROW A	ROW B	
68666-001	6	6	2	0.200	5.08	0.332	8.43	0.066	1.68	0.000	0.00	0.130	3.30	30u"/0.76µ GXT	----	----			
68666-002	8	8	3	0.300	7.62	0.432	10.97	0.066	1.68	0.000	0.00	0.130	3.30						
68666-003	10	10	4	0.400	10.16	0.532	13.51	0.166	4.22	0.000	0.00	0.130	3.30						
68666-004	12	12	5	0.500	12.70	0.632	16.05	0.166	4.22	0.000	0.00	0.130	3.30						
68666-005	14	14	6	0.600	15.24	0.732	18.59	0.266	6.76	0.000	0.00	0.130	3.30						
68666-006	16	16	7	0.700	17.78	0.832	21.13	0.266	6.76	0.000	0.00	0.130	3.30						
68666-007	18	18	8	0.800	20.32	0.932	23.67	0.366	9.30	0.000	0.00	0.130	3.30						
68666-008	20	20	9	0.900	22.86	1.032	26.21	0.066	1.68	0.766	19.46	0.130	3.30						
68666-009	22	22	10	1.000	25.40	1.132	28.75	0.066	1.68	0.866	22.00	0.130	3.30						
68666-010	24	24	11	1.100	27.94	1.232	31.29	0.066	1.68	0.966	24.54	0.130	3.30						
68666-011	26	26	12	1.200	30.48	1.332	33.83	0.066	1.68	1.066	27.08	0.130	3.30						
68666-012	28	28	13	1.300	33.02	1.432	36.37	0.066	1.68	1.166	29.62	0.130	3.30						
68666-013	30	30	14	1.400	35.56	1.532	38.91	0.066	1.68	1.266	32.16	0.130	3.30						
68666-014	32	32	15	1.500	38.10	1.632	41.45	0.066	1.68	1.366	34.70	0.130	3.30						
68666-015	34	34	16	1.600	40.64	1.732	43.99	0.066	1.68	1.466	37.24	0.130	3.30						
68666-016	36	36	17	1.700	43.18	1.832	46.53	0.066	1.68	1.566	39.78	0.130	3.30						
68666-017	38	38	18	1.800	45.72	1.932	49.07	0.066	1.68	1.666	42.32	0.130	3.30						
68666-018	40	40	19	1.900	48.26	2.032	51.61	0.066	1.68	1.766	44.86	0.130	3.30						
68666-019	42	42	20	2.000	50.80	2.132	54.15	0.066	1.68	1.866	47.40	0.130	3.30						
68666-020	44	44	21	2.100	53.34	2.232	56.69	0.066	1.68	1.966	49.94	0.130	3.30						
68666-021	46	46	22	2.200	55.88	2.332	59.23	0.066	1.68	2.066	52.48	0.130	3.30						
68666-022	48	48	23	2.300	58.42	2.432	61.77	0.066	1.68	2.166	55.02	0.130	3.30						
68666-023	50	50	24	2.400	60.96	2.532	64.31	0.066	1.68	2.266	57.56	0.130	3.30						
68666-024	52	52	25	2.500	63.50	2.632	66.85	0.066	1.68	2.366	60.10	0.130	3.30						
68666-025	54	54	26	2.600	66.04	2.732	69.39	0.066	1.68	2.466	62.64	0.130	3.30						
68666-026	56	56	27	2.700	68.58	2.832	71.93	0.066	1.68	2.566	65.18	0.130	3.30						
68666-027	58	58	28	2.800	71.12	2.932	74.47	0.066	1.68	2.666	67.72	0.130	3.30						
68666-028	60	60	29	2.900	73.66	3.032	77.01	0.066	1.68	2.766	70.26	0.130	3.30						
68666-029	62	62	30	3.000	76.20	3.132	79.55	0.066	1.68	2.866	72.80	0.130	3.30						
68666-030	64	64	31	3.100	78.74	3.232	82.09	0.066	1.68	2.966	75.34	0.130	3.30						
68666-031	66	66	32	3.200	81.28	3.332	84.63	0.066	1.68	3.066	77.88	0.130	3.30						
68666-032	68	68	33	3.300	83.82	3.432	87.17	0.066	1.68	3.166	80.42	0.130	3.30						
68666-033	70	70	34	3.400	86.36	3.532	89.71	0.066	1.68	3.266	82.96	0.130	3.30						
68666-034	72	72	35	3.500	88.90	3.632	92.25	0.066	1.68	3.366	85.50	0.130	3.30	30u"/0.76µ GXT	----	----			

mat'l. code	surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection ⊕	product family HEADER
ltr	ecn	no	dr	date
D				
tolerances unless otherwise specified		linear	INCH/MM	title STRAIGHT HEADER FOR ROUND WIRE RECEPTACLE
angles	0°±2'	.XX±.01/.3	scale 8:1	dwg no 68666
dr	M. CORNMAN	9/18/90	FCJ	sheet 3 of 6 size A3
enrg	M. LEACH	9/18/90		type Product Customer Drawing
chr	M. LEACH	9/18/90		
appd	M. LEACH	9/18/90		
sheet index	revision sheet			

PDM: Rev:D STATUS: Released Printed: Oct 13, 2010

REAR SLOT VIEW G-G														POL. POS		
PRODUCT NO	NO. OF		A	DIM B	DIM B	DIM C	DIM C	DIM D	DIM D	DIM E	DIM E	DIM F	DIM F	TERMINAL	POL. POS	
NOTE 9	POS	PINS	SPACES	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	PLATING	ROW A	ROW B
68666-035	6	6	2	0.200	5.08	0.332	8.43	0.066	1.68	0.000	0.00	0.155	3.94	30µ"/0.0.76µ GXT	- - -	- - -
68666-036	8	8	3	0.300	7.62	0.432	10.97	0.066	1.68	0.000	0.00	0.155	3.94			
68666-037	10	10	4	0.400	10.16	0.532	13.51	0.166	4.22	0.000	0.00	0.155	3.94			
68666-038	12	12	5	0.500	12.70	0.632	16.05	0.166	4.22	0.000	0.00	0.155	3.94			
68666-039	14	14	6	0.600	15.24	0.732	18.59	0.266	6.76	0.000	0.00	0.155	3.94			
68666-040	16	16	7	0.700	17.78	0.832	21.13	0.266	6.76	0.000	0.00	0.155	3.94			
68666-041	18	18	8	0.800	20.32	0.932	23.67	0.366	9.30	0.000	0.00	0.155	3.94			
68666-042	20	20	9	0.900	22.86	1.032	26.21	0.066	1.68	0.766	19.46	0.155	3.94			
68666-043	22	22	10	1.000	25.40	1.132	28.75	0.066	1.68	0.866	22.00	0.155	3.94			
68666-044	24	24	11	1.100	27.94	1.232	31.29	0.066	1.68	0.966	24.54	0.155	3.94			
68666-045	26	26	12	1.200	30.48	1.332	33.83	0.066	1.68	1.066	27.08	0.155	3.94			
68666-046	28	28	13	1.300	33.02	1.432	36.37	0.066	1.68	1.166	29.62	0.155	3.94			
68666-047	30	30	14	1.400	35.56	1.532	38.91	0.066	1.68	1.266	32.16	0.155	3.94			
68666-048	32	32	15	1.500	38.10	1.632	41.45	0.066	1.68	1.366	34.70	0.155	3.94			
68666-049	34	34	16	1.600	40.64	1.732	43.99	0.066	1.68	1.466	37.24	0.155	3.94			
68666-050	36	36	17	1.700	43.18	1.832	46.53	0.066	1.68	1.566	39.78	0.155	3.94			
68666-051	38	38	18	1.800	45.72	1.932	49.07	0.066	1.68	1.666	42.32	0.155	3.94			
68666-052	40	40	19	1.900	48.26	2.032	51.61	0.066	1.68	1.766	44.86	0.155	3.94			
68666-053	42	42	20	2.000	50.80	2.132	54.15	0.066	1.68	1.866	47.40	0.155	3.94			
68666-054	44	44	21	2.100	53.34	2.232	56.69	0.066	1.68	1.966	49.94	0.155	3.94			
68666-055	46	46	22	2.200	55.88	2.332	59.23	0.066	1.68	2.066	52.48	0.155	3.94			
68666-056	48	48	23	2.300	58.42	2.432	61.77	0.066	1.68	2.166	55.02	0.155	3.94			
68666-057	50	50	24	2.400	60.96	2.532	64.31	0.066	1.68	2.266	57.56	0.155	3.94			
68666-058	52	52	25	2.500	63.50	2.632	66.85	0.066	1.68	2.366	60.10	0.155	3.94			
68666-059	54	54	26	2.600	66.04	2.732	69.39	0.066	1.68	2.466	62.64	0.155	3.94			
68666-060	56	56	27	2.700	68.58	2.832	71.93	0.066	1.68	2.566	65.18	0.155	3.94			
68666-061	58	58	28	2.800	71.12	2.932	74.47	0.066	1.68	2.666	67.72	0.155	3.94			
68666-062	60	60	29	2.900	73.66	3.032	77.01	0.066	1.68	2.766	70.26	0.155	3.94			
68666-063	62	62	30	3.000	76.20	3.132	79.55	0.066	1.68	2.866	72.80	0.155	3.94			
68666-064	64	64	31	3.100	78.74	3.232	82.09	0.066	1.68	2.966	75.34	0.155	3.94			
68666-065	66	66	32	3.200	81.28	3.332	84.63	0.066	1.68	3.066	77.88	0.155	3.94			
68666-066	68	68	33	3.300	83.82	3.432	87.17	0.066	1.68	3.166	80.42	0.155	3.94			
68666-067	70	70	34	3.400	86.36	3.532	89.71	0.066	1.68	3.266	82.96	0.155	3.94			
68666-068	72	72	35	3.500	88.90	3.632	92.25	0.066	1.68	3.366	85.50	0.155	3.94	30µ"/0.76µ GXT	- - -	- - -

mat'l. code	surface	tolerance	projection	product family
ISO 1302	ISO 406	ISO 1101	⊕	HEADER
itr	ecn	no	dr	date
D				
tolerances unless otherwise specified		title		
angles	linear	.XX±.01/.3		
0°±2'		.XXX±.005/.13		
		.XXXX±.0020/.051		
dr	M. CORNMAN	9/18/90	scale 8:1	
enrg	M. LEACH	9/18/90	sheet4 of 6 size	
chr	M. LEACH	9/18/90	68666 A3	
appd	M. LEACH	9/18/90	type Product Customer Drawing	
sheet index	revision sheet			


PDM: Rev:D STATUS:Released Printed: Oct 13, 2010

REAR SLOT VIEW G-G														POL. POS			
PRODUCT NO	NO.OF		A	DIM B	DIM B	DIM C	DIM C	DIM D	DIM D	DIM E	DIM E	DIM F	DIM F	TERMINAL	PLATING	ROW A	ROW B
NOTE 9	POS	PINS	SPACES	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC				
68666-069	6	6	2	0.200	5.08	0.332	8.43	0.066	1.68	0.000	0.00	0.200	5.08	30µ"/0.76µ GXT	----	----	
68666-070	8	8	3	0.300	7.62	0.432	10.97	0.066	1.68	0.000	0.00	0.200	5.08				
68666-071	10	10	4	0.400	10.16	0.532	13.51	0.166	4.22	0.000	0.00	0.200	5.08				
68666-072	12	12	5	0.500	12.70	0.632	16.05	0.166	4.22	0.000	0.00	0.200	5.08				
68666-073	14	14	6	0.600	15.24	0.732	18.59	0.266	6.76	0.000	0.00	0.200	5.08				
68666-074	16	16	7	0.700	17.78	0.832	21.13	0.266	6.76	0.000	0.00	0.200	5.08				
68666-075	18	18	8	0.800	20.32	0.932	23.67	0.366	9.30	0.000	0.00	0.200	5.08				
68666-076	20	20	9	0.900	22.86	1.032	26.21	0.066	1.68	0.766	19.46	0.200	5.08				
68666-077	22	22	10	1.000	25.40	1.132	28.75	0.066	1.68	0.866	22.00	0.200	5.08				
68666-078	24	24	11	1.100	27.94	1.232	31.29	0.066	1.68	0.966	24.54	0.200	5.08				
68666-079	26	26	12	1.200	30.48	1.332	33.83	0.066	1.68	1.066	27.08	0.200	5.08				
68666-080	28	28	13	1.300	33.02	1.432	36.37	0.066	1.68	1.166	29.62	0.200	5.08				
68666-081	30	30	14	1.400	35.56	1.532	38.91	0.066	1.68	1.266	32.16	0.200	5.08				
68666-082	32	32	15	1.500	38.10	1.632	41.45	0.066	1.68	1.366	34.70	0.200	5.08				
68666-083	34	34	16	1.600	40.64	1.732	43.99	0.066	1.68	1.466	37.24	0.200	5.08				
68666-084	36	36	17	1.700	43.18	1.832	46.53	0.066	1.68	1.566	39.78	0.200	5.08				
68666-085	38	38	18	1.800	45.72	1.932	49.07	0.066	1.68	1.666	42.32	0.200	5.08				
68666-086	40	40	19	1.900	48.26	2.032	51.61	0.066	1.68	1.766	44.86	0.200	5.08				
68666-087	42	42	20	2.000	50.80	2.132	54.15	0.066	1.68	1.866	47.40	0.200	5.08				
68666-088	44	44	21	2.100	53.34	2.232	56.69	0.066	1.68	1.966	49.94	0.200	5.08				
68666-089	46	46	22	2.200	55.88	2.332	59.23	0.066	1.68	2.066	52.48	0.200	5.08				
68666-090	48	48	23	2.300	58.42	2.432	61.77	0.066	1.68	2.166	55.02	0.200	5.08				
68666-091	50	50	24	2.400	60.96	2.532	64.31	0.066	1.68	2.266	57.56	0.200	5.08				
68666-092	52	52	25	2.500	63.50	2.632	66.85	0.066	1.68	2.366	60.10	0.200	5.08				
68666-093	54	54	26	2.600	66.04	2.732	69.39	0.066	1.68	2.466	62.64	0.200	5.08				
68666-094	56	56	27	2.700	68.58	2.832	71.93	0.066	1.68	2.566	65.18	0.200	5.08				
68666-095	58	58	28	2.800	71.12	2.932	74.47	0.066	1.68	2.666	67.72	0.200	5.08				
68666-096	60	60	29	2.900	73.66	3.032	77.01	0.066	1.68	2.766	70.26	0.200	5.08				
68666-097	62	62	30	3.000	76.20	3.132	79.55	0.066	1.68	2.866	72.80	0.200	5.08				
68666-098	64	64	31	3.100	78.74	3.232	82.09	0.066	1.68	2.966	75.34	0.200	5.08				
68666-099	66	66	32	3.200	81.28	3.332	84.63	0.066	1.68	3.066	77.88	0.200	5.08				
68666-100	68	68	33	3.300	83.82	3.432	87.17	0.066	1.68	3.166	80.42	0.200	5.08				
68666-101	70	70	34	3.400	86.36	3.532	89.71	0.066	1.68	3.266	82.96	0.200	5.08				
68666-102	72	72	35	3.500	88.90	3.632	92.25	0.066	1.68	3.366	85.50	0.200	5.08	30µ"/0.76µ GXT	----	----	

mat'l. code			surface ISO 1302 ✓			tolerance ISO 406 ISO 1101			projection ⊕			product family HEADER		
ltr			ecn no dr			date			tolerances unless otherwise specified			title		
D									linear .XX±.01/.3			INCH/MM		
									0°±2'			STRAIGHT HEADER FOR		
									.XXXX±.0020/.051			ROUND WIRE RECEPTACLE		
									dr M. CORNMAN 9/18/90			scale 8:1		
									enrg M. LEACH 9/18/90			sheet 5 of 6 size		
									chr M. LEACH 9/18/90			68666 A3		
									appd M. LEACH 9/18/90			type Product Customer Drawing		
sheet			revision											
index			sheet											

PDM: Rev:D STATUS Released Printed: Oct 13, 2010

REAR SLOT VIEW G-G																
PRODUCT NO	NO.OF		A	DIM B		DIM C		DIM D		DIM E		DIM F		TERMINAL	POL.	POS
NOTE 9	POS	PINS	SPACES	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	PLATING	ROW A	ROW B
68666-103	6	6	2	0.200	5.08	0.332	8.43	0.066	1.68	0.000	0.00	0.380	9.65	30μ"/0.76μ GXT	----	----
68666-104	8	8	3	0.300	7.62	0.432	10.97	0.066	1.68	0.000	0.00	0.380	9.65			
68666-105	12	12	5	0.500	12.70	0.632	16.05	0.166	4.22	0.000	0.00	0.380	9.65			
68666-106	16	16	7	0.700	17.78	0.832	21.13	0.266	6.76	0.000	0.00	0.380	6.65			
68666-107	20	20	9	0.900	22.86	1.032	26.21	0.066	1.68	0.766	19.46	0.380	9.65			
68666-108	14	13	6	0.600	15.24	0.732	18.59	0.266	6.76	0.000	0.00	0.130	3.30	30μ"/0.76μ GXT	1	----

mat'l. code	surface	tolerance	projection	product family
ISO 1302	ISO 1302 ✓	ISO 406	ISO 1101	HEADER
itr	ecn	no	dr	date
D				
tolerances unless otherwise specified				title
angles	linear	.XX±.01/.3	INCH/MM	STRAIGHT HEADER FOR
0°±2'		.XXX±.005/.13	scale 8:1	ROUND WIRE RECEPTACLE
dr	M. CORNMAN	9/18/90		dwg no
enrg	M. LEACH	9/18/90		68666
chr	M. LEACH	9/18/90		sheet 6 of 6 size
appd	M. LEACH	9/18/90		A3
sheet index	revision sheet			type
				Product Customer Drawing

PDM: Rev:D STATUS: Released Printed: Oct 13, 2010