


NOTES:

1. MATERIAL: SHROUDED WAFER, GLASS FILLED NYLON, COLOR BLACK, UL94V-0 PINS PHOSPHOR BRONZE
2. FINISH: SEE CHARTS
3. PRODUCT SPECIFICATION: PS-8723
4. PACKAGING INFORMATION: SEE CHARTS
5. WINDOW NOT AVAILABLE ON 6 DKT.
6. FOR CHARTED DIMENSIONS AND ASSEMBLY N.O.S NOT SHOWN ON THIS SHEET - SEE SHEET 2.
7. 20 CIRCUIT SIZE SHOWN FOR ILLUSTRATION PURPOSES.
8. PIN PUSHOUT FORCE: (17.79) N/4 LBS.
9. PINS MUST MEET SOLDERABILITY SPEC. ML-STD-202 METHOD 200B.
10. ROW TO ROW PIN HEIGHT VARIATION MUST NOT EXCEED (0.25)/0.10 IN.
11. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

DKT.	DIM. 'A'	DIM. 'B'	DIM. 'C'	DIM. 'D'	DIM. 'E'	DIM. 'F'	DIM. 'G'
06	(1.68)	(6.43)	(5.08)	(1.68)			
08	(1.68)	(10.97)	(7.62)	(1.68)			
10	(1.68)	(15.51)	(10.16)	(1.68)			
12	(1.68)	(15.05)	(12.70)	(1.68)			
14	(1.68)	(18.59)	(15.24)	(1.68)			
16	(1.68)	(21.13)	(17.78)	(1.68)			
18	(1.68)	(23.67)	(20.32)	(1.68)			
20	(1.68)	(26.21)	(22.86)	(1.68)			
22	(1.68)	(28.75)	(25.40)	(1.68)			
24	(1.68)	(31.29)	(27.94)	(1.68)			
26	(1.68)	(33.83)	(30.48)	(1.68)			
28	(1.68)	(36.37)	(33.02)	(1.68)			
30	(1.68)	(38.91)	(35.56)	(1.68)			
32	(1.68)	(41.45)	(38.10)	(1.68)			
34	(1.68)	(43.99)	(40.64)	(1.68)			
36	(1.68)	(46.53)	(43.18)	(1.68)			
38	(1.68)	(49.07)	(45.72)	(1.68)			
40	(1.68)	(51.61)	(48.26)	(1.68)			
42	(1.68)	(54.15)	(50.80)	(1.68)			
44	(1.68)	(56.69)	(53.34)	(1.68)			
46	(1.68)	(59.23)	(55.88)	(1.68)			
48	(1.68)	(61.77)	(58.42)	(1.68)			
50	(1.68)	(64.31)	(60.96)	(1.68)			
52	(1.68)	(66.85)	(63.50)	(1.68)			
54	(1.68)	(69.39)	(66.04)	(1.68)			
56	(1.68)	(71.93)	(68.58)	(1.68)			
58	(1.68)	(74.47)	(71.12)	(1.68)			
60	(1.68)	(77.01)	(73.66)	(1.68)			
62	(1.68)	(79.55)	(76.20)	(1.68)			
64	(1.68)	(82.09)	(78.74)	(1.68)			
66	(1.68)	(84.63)	(81.28)	(1.68)			
68	(1.68)	(87.17)	(83.82)	(1.68)			
70	(1.68)	(89.71)	(86.36)	(1.68)			
72	(1.68)	(92.25)	(88.90)	(1.68)			

ASSEMBLY STYLES "A", "B", AND "G"

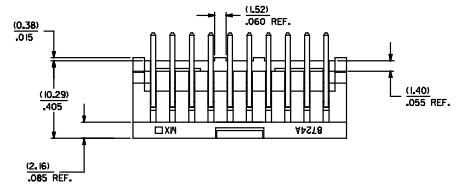

QUALITY SYMBOLS ▽=0 ▽=0.1 ▽=0.25 ▽=0.36 ANGL. AR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ± .010 ± .010 3 PLACES ± .010 ± .010 2 PLACES ± 0.25 ± .014 1 PLACE ± 0.36 ± .014 ANGL. AR ±1/2°	DIMENSION STYLE MM/IN SCALE: 4:1 DESIGN UNITS: INCH TITLE: SALES ASSEMBLY WAFER-RIGHT ANGLE FULLY SHROUDED .100 GRID MOLEX INCORPORATED SDA-8724-***** SHEET NO. 1 OF 8	THIRD ANGLE PROJECTION	
	ADD. NOTES: EDC: MJC/2008-0539 RY: CHYD-BELL APPROV: 2008/07/28	DRAWN BY: JL DATE: 1986/06/26 CHECKED BY: NB DATE: 1986/06/26 APPROVED BY: MAZ DATE: 1986/06/26	MATERIAL NO.: SEE CHART DOCUMENT NO.: SDA-8724-*****	MOLEX INCORPORATED
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			SHEET NO. 1 OF 8
	SALES ASSEMBLY WAFER-RIGHT ANGLE FULLY SHROUDED .100 GRID			

