

# Notice for TAIYO YUDEN products

Please read this notice before using the TAIYO YUDEN products.

## REMINDERS

- Product information in this catalog is as of October 2010. All of the contents specified herein are subject to change without notice due to technical improvements, etc. Therefore, please check for the latest information carefully before practical application or usage of the Products.

Please note that Taiyo Yuden Co., Ltd. shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this catalog or individual specification.

- Please contact Taiyo Yuden Co., Ltd. for further details of product specifications as the individual specification is available.
- Please conduct validation and verification of products in actual condition of mounting and operating environment before commercial shipment of the equipment.
- All electronic components or functional modules listed in this catalog are developed, designed and intended for use in general electronics equipment.(for AV, office automation, household, office supply, information service, telecommunications, (such as mobile phone or PC) etc.). Before incorporating the components or devices into any equipment in the field such as transportation,( automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network (telephone exchange, base station) etc. which may have direct influence to harm or injure a human body, please contact Taiyo Yuden Co., Ltd. for more detail in advance. Do not incorporate the products into any equipment in fields such as aerospace, aviation, nuclear control, submarine system, military, etc. where higher safety and reliability are especially required.

In addition, even electronic components or functional modules that are used for the general electronic equipment, if the equipment or the electric circuit require high safety or reliability function or performances, a sufficient reliability evaluation check for safety shall be performed before commercial shipment and moreover, due consideration to install a protective circuit is strongly recommended at customer's design stage.

- The contents of this catalog are applicable to the products which are purchased from our sales offices or distributors (so called "TAIYO YUDEN' s official sales channel"). It is only applicable to the products purchased from any of TAIYO YUDEN' s official sales channel.
- Please note that Taiyo Yuden Co., Ltd. shall have no responsibility for any controversies or disputes that may occur in connection with a third party's intellectual property rights and other related rights arising from your usage of products in this catalog. Taiyo Yuden Co., Ltd. grants no license for such rights.
- Caution for export**  
Certain items in this catalog may require specific procedures for export according to "Foreign Exchange and Foreign Trade Control Law" of Japan, "U.S. Export Administration Regulations", and other applicable regulations. Should you have any question or inquiry on this matter, please contact our sales staff.

# MULTILAYER CHIP INDUCTORS (LK SERIES)



WAVE\* REFLOW

\*Except for LK1005

## FEATURES

- Internal printed coil structure creates a closed magnetic circuit which acts as a magnetic shield eliminating crosstalk, thus permitting higher mounting densities.
- Multilayer block structure yields higher reliability.
- The smallest  $\mu\text{H}$  inductors in the world (LK1005 series)

## APPLICATIONS


- Any general circuit of portable equipment in which compact size and high mounting densities are required.

## OPERATING TEMP.


- $-40\sim 85^\circ\text{C}$

## ORDERING CODE

L K 1 6 0 8 R 1 0 M - T  $\square$

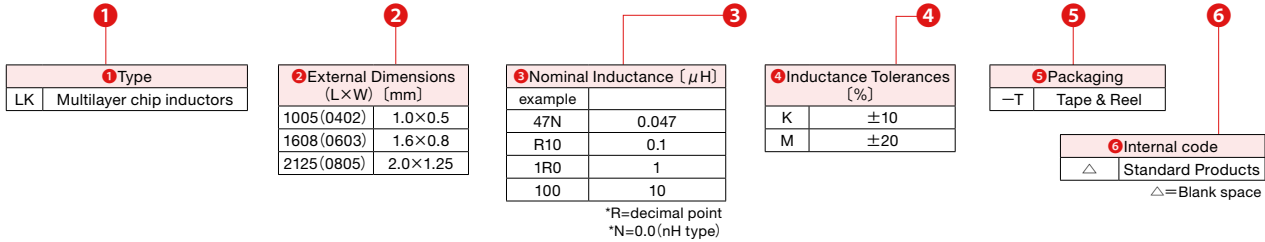

## EXTERNAL DIMENSIONS/STANDARD QUANTITY



Type	L	W	T	e	Standard Quantity [pcs]	
					Paper Tape	Embossed Tape
LK1005 (0402)	1.00±0.05 (0.039±0.002)	0.50±0.05 (0.020±0.002)	0.50±0.05 (0.020±0.002)	0.25±0.10 (0.010±0.004)	10000	—
LK1608 (0603)	1.6±0.15 (0.063±0.006)	0.8±0.15 (0.031±0.006)	0.8±0.15 (0.031±0.006)	0.3±0.2 (0.012±0.008)	4000	—
LK2125 (0805)	2.0 <sup>+0.3</sup> <sub>-0.1</sub> (0.079 <sup>+0.012</sup> <sub>-0.004</sub> )	1.25±0.2 (0.049±0.008)	0.85±0.2 (0.033±0.008)	0.5±0.3 (0.020±0.012)	4000	—
			1.25±0.2 (0.049±0.008)		—	2000

Unit : mm (inch)

## AVAILABLE INDUCTANCE RANGE

Inductance [ $\mu\text{H}$ ]	0.047	0.068	0.082	0.10	0.12	0.15	0.18	0.22	0.27	0.33	0.39	0.47	0.56	0.68	0.82	1.0	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6	6.8	8.2	10	12	15	18	22	27	33			
LK1005 (max. mA)					R12□	R15□	R18□	R22□	R27□	R33□	R39□	R47□	R56□	R68□	R82□	1R0□	1R2□	1R5□	1R8□	2R2□																	
LK1608 (max. mA)	47NM	68NM	82NM	R10□	R12□	R15□	R18□	R22□	R27□	R33□	R39□	R47□	R56□	R68□	R82□	1R0□	1R2□	1R5□	1R8□	2R2□	2R7□	3R3□	3R9□	4R7□	5R6□	6R8□	8R2□	100□	120□	150M	180M	220M	270M	330M			
LK2125 (max. mA)	47NM	68NM	82NM	R10□	R12□	R15□	R18□	R22□	R27□	R33□	R39□	R47□	R56□	R68□	R82□	1R0□	1R2□	1R5□	1R8□	2R2□	2R7□	3R3□	3R9□	4R7□	5R6□	6R8□	8R2□	100□	120□	150M	180M	220M	270M	330M			

## PART NUMBERS

### LK1005

Ordering code	EHS (Environmental Hazardous Substances)	Inductance [ $\mu\text{H}$ ]	Inductance tolerance	Q (min.)	Self resonant frequency [MHz] (min.)	Resistance DC [ $\Omega$ ] (max.)	Rated current [mA] (max.)	Measuring frequency [MHz]	Thickness [mm] (inch)
LK 1005 R12□	RoHS	0.12	$\pm 10\%$ $\pm 20\%$	10	180	0.59	25	25	0.50±0.05 (0.020±0.002)
LK 1005 R15□	RoHS	0.15		10	165	0.63	25	25	
LK 1005 R18□	RoHS	0.18		10	150	0.76	25	25	
LK 1005 R22□	RoHS	0.22		10	135	0.79	25	25	
LK 1005 R27□	RoHS	0.27		10	120	0.91	25	25	
LK 1005 R33□	RoHS	0.33		10	105	1.05	25	25	
LK 1005 R39□	RoHS	0.39		20	85	0.41	20	10	
LK 1005 R47□	RoHS	0.47		20	80	0.42	20	10	
LK 1005 R56□	RoHS	0.56		20	75	0.47	20	10	
LK 1005 R68□	RoHS	0.68		20	70	0.55	20	10	
LK 1005 R82□	RoHS	0.82		20	65	0.59	20	10	
LK 1005 1R0□	RoHS	1.0		20	60	0.64	20	10	
LK 1005 1R2□	RoHS	1.2		20	55	0.79	20	10	
LK 1005 1R5□	RoHS	1.5		20	50	0.95	20	10	
LK 1005 1R8□	RoHS	1.8		20	45	1.16	20	10	
LK 1005 2R2□	RoHS	2.2		20	40	1.15	20	10	

□ Please specify the Inductance tolerance code (K or M)

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

**PART NUMBERS**

**LK1608**

Ordering code	EHS(Environmental Hazardous Substances)	Inductance (μH)	Inductance tolerance	Q (min.)	Self resonant frequency (MHz) (min.)	Resistance DC (Ω) (max.)	Rated current (mA) (max.)	Measuring frequency (MHz)	Thickness (mm) (inch)	
LK 1608 47NM	RoHS	0.047	±20%	10	260	0.20	150	50	0.8±0.15 (0.031±0.006)	
LK 1608 68NM	RoHS	0.068		10	250	0.30	150	50		
LK 1608 82NM	RoHS	0.082		10	245	0.30	150	50		
LK 1608 R10□	RoHS	0.10		±10%	15	240	0.35	150		25
LK 1608 R12□	RoHS	0.12			15	205	0.40	150		25
LK 1608 R15□	RoHS	0.15			15	180	0.45	150		25
LK 1608 R18□	RoHS	0.18			15	165	0.50	100		25
LK 1608 R22□	RoHS	0.22			15	150	0.55	100		25
LK 1608 R27□	RoHS	0.27			15	136	0.80	100		25
LK 1608 R33□	RoHS	0.33			15	125	0.75	80		25
LK 1608 R39□	RoHS	0.39	15		110	0.85	80	25		
LK 1608 R47□	RoHS	0.47	15		105	0.95	80	25		
LK 1608 R56□	RoHS	0.56	15		95	1.05	80	25		
LK 1608 R68□	RoHS	0.68	±20%	15	80	1.25	40	25		
LK 1608 R82□	RoHS	0.82		15	75	1.40	40	25		
LK 1608 1R0□	RoHS	1.0		35	70	0.60	40	10		
LK 1608 1R2□	RoHS	1.2		35	60	0.65	40	10		
LK 1608 1R5□	RoHS	1.5		35	55	0.70	40	10		
LK 1608 1R8□	RoHS	1.8		35	50	0.95	40	10		
LK 1608 2R2□	RoHS	2.2		35	45	1.00	30	10		
LK 1608 2R7□	RoHS	2.7		35	40	1.15	30	10		
LK 1608 3R3□	RoHS	3.3		35	38	1.30	30	10		
LK 1608 3R9□	RoHS	3.9		35	36	1.50	30	10		
LK 1608 4R7□	RoHS	4.7	35	33	1.60	30	10			
LK 1608 5R6□	RoHS	5.6	35	22	1.10	10	4			
LK 1608 6R8□	RoHS	6.8	35	20	1.30	10	4			
LK 1608 8R2□	RoHS	8.2	35	18	1.50	10	4			
LK 1608 100□	RoHS	10	35	17	1.70	10	2			
LK 1608 120□	RoHS	12	35	15	1.80	10	2			
LK 1608 150M	RoHS	15	20	14	1.50	1	1			
LK 1608 180M	RoHS	18	±20%	20	13	1.60	1	1		
LK 1608 220M	RoHS	22		20	11	1.70	1	1		
LK 1608 270M	RoHS	27		20	10	1.80	1	1		
LK 1608 330M	RoHS	33		20	9	2.20	1	1		

□ Please specify the Inductance tolerance code (K or M)

**LK2125**

Ordering code	EHS(Environmental Hazardous Substances)	Inductance (μH)	Inductance tolerance	Q (min.)	Self resonant frequency (MHz) (min.)	Resistance DC (Ω) (max.)	Rated current (mA) (max.)	Measuring frequency (MHz)	Thickness (mm) (inch)	
LK 2125 47NM	RoHS	0.047	±20%	15	320	0.10	300	50	0.85±0.2 (0.033±0.008)	
LK 2125 68NM	RoHS	0.068		15	280	0.15	300	50		
LK 2125 82NM	RoHS	0.082		15	255	0.20	300	50		
LK 2125 R10□	RoHS	0.10		±10%	20	235	0.15	270		25
LK 2125 R12□	RoHS	0.12			20	220	0.20	270		25
LK 2125 R15□	RoHS	0.15			20	200	0.20	270		25
LK 2125 R18□	RoHS	0.18			20	185	0.25	270		25
LK 2125 R22□	RoHS	0.22			20	170	0.30	250		25
LK 2125 R27□	RoHS	0.27			20	150	0.35	250		25
LK 2125 R33□	RoHS	0.33			20	145	0.40	250		25
LK 2125 R39□	RoHS	0.39	25		135	0.45	200	25		
LK 2125 R47□	RoHS	0.47	25		125	0.50	200	25		
LK 2125 R56□	RoHS	0.56	±20%		25	115	0.55	150		25
LK 2125 R68□	RoHS	0.68		25	105	0.60	150	25		
LK 2125 R82□	RoHS	0.82		25	100	0.65	150	25		
LK 2125 1R0□	RoHS	1.0		45	75	0.30	80	10		
LK 2125 1R2□	RoHS	1.2		45	65	0.35	80	10		
LK 2125 1R5□	RoHS	1.5		45	60	0.40	80	10		
LK 2125 1R8□	RoHS	1.8		45	55	0.45	80	10		
LK 2125 2R2□	RoHS	2.2		45	50	0.50	50	10		
LK 2125 2R7□	RoHS	2.7		45	45	0.55	50	10		
LK 2125 3R3□	RoHS	3.3		45	41	0.60	50	10		
LK 2125 3R9□	RoHS	3.9	45	38	0.70	30	10			
LK 2125 4R7□	RoHS	4.7	45	35	0.70	30	10			
LK 2125 5R6□	RoHS	5.6	50	32	0.60	15	4			
LK 2125 6R8□	RoHS	6.8	50	29	0.70	15	4			
LK 2125 8R2□	RoHS	8.2	50	26	0.70	15	4			
LK 2125 100□	RoHS	10	50	24	0.80	15	2			
LK 2125 120□	RoHS	12	50	22	0.90	15	2			
LK 2125 150M	RoHS	15	30	19	0.70	5	1			
LK 2125 180M	RoHS	18	±20%	30	18	0.80	5	1		
LK 2125 220M	RoHS	22		30	16	0.90	5	1		
LK 2125 270M	RoHS	27		30	14	1.00	5	1		
LK 2125 330M	RoHS	33		30	13	1.10	5	0.4		


□ Please specify the Inductance tolerance code (K or M)

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

# ELECTRICAL CHARACTERISTICS


## DC Bias characteristics

Measured by HP4194A

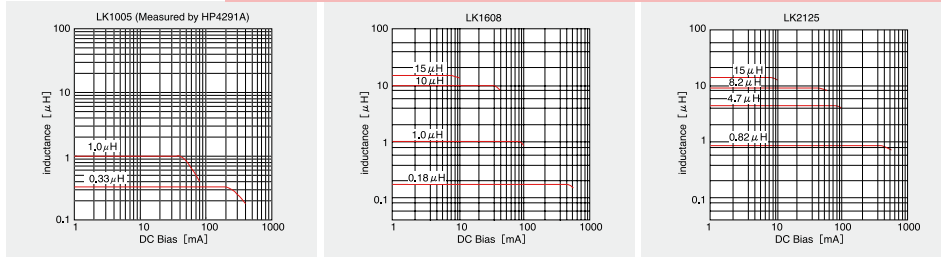


## Temperature characteristics

Measured by HP4275A

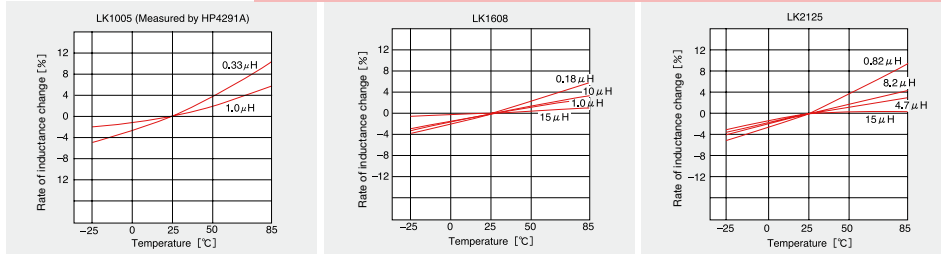


## Q-vs-Frequency characteristics

Measured by HP4294A or HP4291A

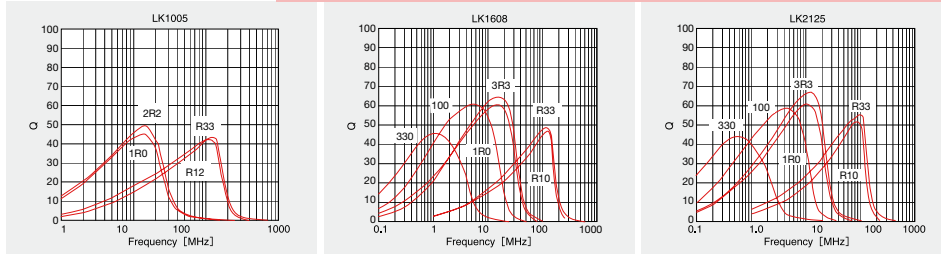


## Inductance-vs-Frequency characteristics

Measured by HP4294A or HP4291A

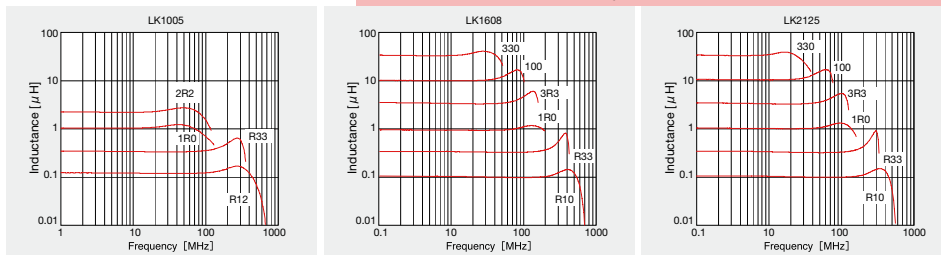

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.



---

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.  
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

# MULTILAYER CHIP INDUCTORS (CK SERIES & CKS SERIES)



WAVE REFLOW

## FEATURES

- Internal printed coil structure creates a closed magnetic circuit which acts as a magnetic shield eliminating crosstalk, thus permitting higher mounting densities.
- Multilayer block structure yields higher reliability.
- New lineup CK series S type specified with lower DC resistance and higher current than those of CK series.

## APPLICATIONS

- Separation of analog and digital circuits.
- Prevents interference between PLL and the other digital circuits.

## OPERATING TEMP.

- 40~85°C

## ORDERING CODE

C   K   2   1   2   5   1   R   0   M   -   T   ○

**1 Type**

CK	Multilayer chip inductors
CKS	Multilayer chip inductors

**2 External Dimensions (L×W) [mm]**

1608(0603)	1.6×0.8
2125(0805)	2.0×1.25

**3 Nominal Inductance [μH]**

example	
1R0	1
100	10

**4 Inductance Tolerances (%)**

M	±20
---	-----

**5 Packaging**


-T	Tape & Reel
----	-------------

**6 Internal code**

△	Standard Products
---	-------------------

\*R=decimal point  
△=Blank space

## EXTERNAL DIMENSIONS/STANDARD QUANTITY



Type	L	W	T	e	Standard Quantity [pcs]	
					Paper Tape	Embossed Tape
CK1608 (0603)	1.6±0.15 (0.063±0.006)	0.8±0.15 (0.031±0.006)	0.8±0.15 (0.031±0.006)	0.3±0.2 (0.012±0.008)	4000	—
CK2125 CKS2125 (0805)	2.0 <sup>+0.3</sup> <sub>-0.1</sub> (0.079 <sup>+0.012</sup> <sub>-0.004</sub> )	1.25±0.2 (0.049±0.008)	0.85±0.2 (0.033±0.008) 1.25±0.2 (0.049±0.008)	0.5±0.3 (0.020±0.012)	4000	— 2000

Unit : mm (inch)

## AVAILABLE INDUCTANCE RANGE

Inductance [μH]	0.10	0.15	0.22	0.33	0.47	0.68	1.0	1.5	2.2	3.3	4.7	6.8	10.0
CK1608 Rated current [mA]											4R7M 60		100M 50
CK2125 Rated current [mA]	R10M 500	R15M 500	R22M 400	R33M 400	R47M 400	R68M 300	1R0M 220	1R5M 170	2R2M 150	3R3M 130	4R7M 120	6R8M 70	100M 60
CKS2125 Rated current [mA]							1R0M 280		2R2M 170		4R7M 130		100M 110

## PART NUMBERS

### CK1608

Ordering code	EHS (Environmental Hazardous Substances)	Inductance [μH]	Inductance tolerance	Self resonant frequency [MHz] (min.)	Resistance DC [Ω] (±30%)	Rated current [mA] (max.)	Measuring frequency [MHz]	Thickness [mm] (inch)
CK 1608 4R7M	RoHS	4.7	±20%	25	0.45	60	4	0.8±0.15 (0.031±0.006)
CK 1608 100M	RoHS	10.0		17	0.85	50	2	

### CK2125


Ordering code	EHS (Environmental Hazardous Substances)	Inductance [μH]	Inductance tolerance	Self resonant frequency [MHz] (min.)	Resistance DC [Ω]		Rated current [mA] (max.)	Measuring frequency [MHz]	Thickness [mm] (inch)
					(max.)	(typ.)			
CK 2125 R10M	RoHS	0.10	±20%	235	0.16	0.08	500	25	0.85±0.2 (0.033±0.008)
CK 2125 R15M	RoHS	0.15		200	0.20	0.13	500	25	
CK 2125 R22M	RoHS	0.22		170	0.23	0.16	400	25	
CK 2125 R33M	RoHS	0.33		145	0.28	0.21	400	25	1.25±0.2 (0.049±0.008)
CK 2125 R47M	RoHS	0.47		125	0.32	0.25	400	25	
CK 2125 R68M	RoHS	0.68		105	0.45	0.35	300	25	0.85±0.2 (0.033±0.008)
CK 2125 1R0M	RoHS	1.0		75	0.26	0.19	220	10	
CK 2125 1R5M	RoHS	1.5		60	0.28	0.23	170	10	1.25±0.2 (0.049±0.008)
CK 2125 2R2M	RoHS	2.2		50	0.35	0.26	150	10	
CK 2125 3R3M	RoHS	3.3		41	0.43	0.38	130	10	1.25±0.2 (0.049±0.008)
CK 2125 4R7M	RoHS	4.7	35	0.48	0.44	120	10		
CK 2125 6R8M	RoHS	6.8	29	0.52	0.39	70	4		
CK 2125 100M	RoHS	10.0	24	0.65	0.55	60	2		

### CKS2125



Ordering code	EHS (Environmental Hazardous Substances)	Inductance [μH]	Inductance tolerance	Self resonant frequency [MHz] (min.)	Resistance DC [Ω]		Rated current [mA] (max.)	Measuring frequency [MHz]	Thickness [mm] (inch)
					(max.)	(typ.)			
CKS 2125 1R0M	RoHS	1.0	±20%	75	0.12	0.09	280	10	0.85±0.2 (0.033±0.008)
CKS 2125 2R2M	RoHS	2.2		50	0.19	0.15	170	10	
CKS 2125 4R7M	RoHS	4.7		35	0.30	0.25	130	10	1.25±0.2 (0.049±0.008)
CKS 2125 100M	RoHS	10.0		24	0.52	0.40	110	2	

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

DC Bias characteristics

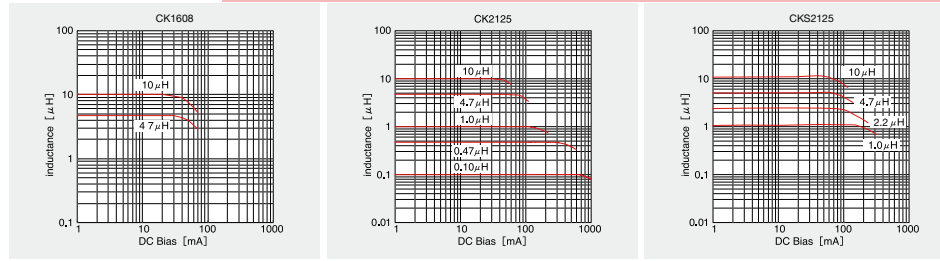

Impedance frequency characteristics

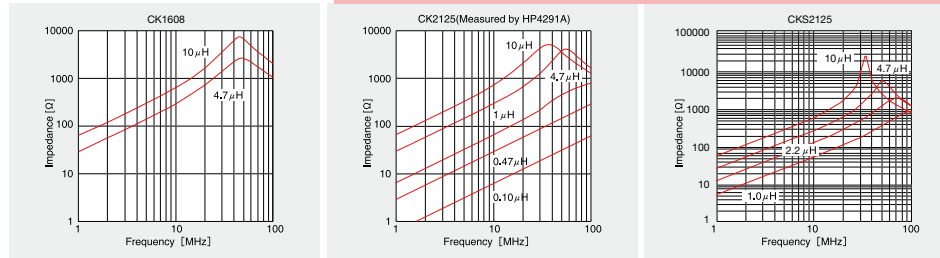

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

# MULTILAYER CHIP POWER INDUCTORS (CK SERIES P TYPE) (NM SERIES)



WAVE REFLOW

## FEATURES

- Low profile below 1.2mm.
- Low Rdc.
- Multilayer block Structure yields higher reliability.
- New line up NM series improved in inductance temperature characteristic based on current CK series P type.

## APPLICATIONS

- DC/DC converter for the Mobile equipment; Cellular Phones, DSC, DVC.

## ORDERING CODE

C K P 2 5 2 0 V 1 R 0 M - T ○

1

1 Type	
CKP	Multilayer chip power inductors
NM	Multilayer chip power inductors (Temperature characteristic improved)

2

2 External Dimensions (L×W) (mm)	
2012 (0805)	2.0×1.25
2016 (0806)	2.0×1.6
2520 (1008)	2.5×2.0

3

3 Thickness (mm)	
V	1.2Max.
△ or N	1.0Max.
M	0.8Max.

△=Space

4

4 Nominal Inductance (μH)	
example	
1R0	1.0
R82	0.82

\*R=decimal point

5

5 Inductance Tolerances (%)	
M	±20


6

6 Packaging	
-T	Tape & Reel

7

7 Internal code	
△	Standard Products
△	Blank space

## EXTERNAL DIMENSIONS/STANDARD QUANTITY



Type	L	W	T	e	Standard Quantity [pcs]	
					Paper Tape	Embossed Tape
CKP2012 NM2012 (0805)	2.0±0.2 (0.079±0.008)	1.25±0.2 (0.049±0.008)	1.0max (0.039max)	0.5±0.3 (0.02±0.012)	-	3000
CKP2016 (0806)		1.6±0.2 (0.063±0.008)				
CKP2520 NM2520 (1008)	2.5±0.2 (0.098±0.008)	0.8max (0.031max)	1.0max (0.039max)			
		1.2max (0.047max)				

Unit : mm (inch)

## AVAILABLE INDUCTANCE RANGE

Inductance [μH]	0.47	1.0	1.5	2.2	3.3	4.7
CKP2012N	R47	1R0	1R5	2R2	3R3	4R7
Rated current [A]	1.2	1.0	0.8	0.8	0.7	0.7

Inductance [μH]	0.47	1.0	1.5	2.2	3.3	4.7
CKP2016	R47	1R0	1R5	2R2	3R3	4R7
Rated current [A]	1.6	1.3	1.2	1.2	1.1	0.9

Inductance [μH]	0.47	1.0	1.5	2.2	3.3	4.7
CKP2520M			1R5	2R2		
Rated current [A]			1.3	1.2		
CKP2520	R47	1R0	1R5	2R2	3R3	4R7
Rated current [A]	1.8	1.4	1.3	1.3	1.2	1.1
CKP2520N		1R0		2R2		4R7
Rated current [A]		1.2		1.2		1.1
CKP2520V		1R0		2R2	3R3	4R7
Rated current [A]		1.2		1.1	1.1	1.1

Inductance [μH]	0.82	1.0
NM2012N	R82	1R0
Rated current [A]	1.2	1.0

Inductance [μH]	1.0	2.2
NM2520V	1R0	2R2
Rated current [A]	1.1	0.9

※) Rated current specifies that self-heat generation is below 40degC during DC loaded (at20degC).

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.



**PART NUMBERS**

● CKP2012

Ordering code	EHS (Environmental Hazardous Substances)	Inductance [μH]	Inductance tolerance	DC resistance [Ω]		Rated current [A] (max.)	Measuring frequency [MHz]	Thickness [mm] (inch)
				(max.)	(typ.)			
CKP2012NR47M	RoHS	0.47	±20%	0.10	0.08	1.2	1	1.0max (0.039max)
CKP2012N1R0M	RoHS	1.0		0.14	0.11	1.0		
CKP2012N1R5M	RoHS	1.5		0.20	0.15	0.8		
CKP2012N2R2M	RoHS	2.2		0.20	0.15	0.8		
CKP2012N3R3M	RoHS	3.3		0.24	0.20	0.7		
CKP2012N4R7M	RoHS	4.7		0.28	0.23	0.7		

● CKP2016

Ordering code	EHS (Environmental Hazardous Substances)	Inductance [μH]	Inductance tolerance	DC resistance [Ω]		Rated current [A] (max.)	Measuring frequency [MHz]	Thickness [mm] (inch)
				(max.)	(typ.)			
CKP2016 R47M	RoHS	0.47	±20%	0.075	0.06	1.6	1	1.0max (0.039max)
CKP2016 1R0M	RoHS	1.0		0.12	0.09	1.3		
CKP2016 1R5M	RoHS	1.5		0.13	0.10	1.2		
CKP2016 2R2M	RoHS	2.2		0.14	0.11	1.2		
CKP2016 3R3M	RoHS	3.3		0.16	0.13	1.1		
CKP2016 4R7M	RoHS	4.7		0.20	0.16	0.9		

● CKP2520

Ordering code	EHS (Environmental Hazardous Substances)	Inductance [μH]	Inductance tolerance	DC resistance [Ω]		Rated current [A] (max.)	Measuring frequency [MHz]	Thickness [mm] (inch)		
				(max.)	(typ.)					
CKP2520M1R5M	RoHS	1.5	±20%	0.09	0.075	1.3	1	0.8max(0.031max)		
CKP2520M2R2M	RoHS	2.2		0.10	0.08	1.2				
CKP2520 R47M	RoHS	0.47		0.05	0.04	1.8				
CKP2520 1R0M	RoHS	1.0		0.08	0.065	1.4				
CKP2520 1R5M	RoHS	1.5		0.09	0.075	1.3				
CKP2520 2R2M	RoHS	2.2		0.09	0.075	1.3				
CKP2520 3R3M	RoHS	3.3		0.12	0.09	1.2				
CKP2520 4R7M	RoHS	4.7		0.15	0.12	1.1				
CKP2520N1R0M	RoHS	1.0		0.115	0.09	1.2				
CKP2520N2R2M	RoHS	2.2		0.115	0.09	1.2				
CKP2520N4R7M	RoHS	4.7		0.16	0.14	1.1				
CKP2520V1R0M	RoHS	1.0		0.12	0.09	1.2				
CKP2520V2R2M	RoHS	2.2		0.15	0.12	1.1				
CKP2520V3R3M	RoHS	3.3		0.15	0.11	1.1				
CKP2520V4R7M	RoHS	4.7		0.16	0.14	1.1				
										1.2max (0.047max)

● NM2012

Ordering code	EHS (Environmental Hazardous Substances)	Inductance [μH]	Inductance tolerance	DC resistance [Ω]		Rated current [A] (max.)	Measuring frequency [MHz]	Thickness [mm] (inch)
				(max.)	(typ.)			
NM2012NR82M	RoHS	0.82	±20%	0.10	0.085	1.2	1	1.0max (0.039max)
NM2012N1R0M	RoHS	1.0		0.15	0.12	1.0		

● NM2520


Ordering code	EHS (Environmental Hazardous Substances)	Inductance [μH]	Inductance tolerance	DC resistance [Ω]		Rated current [A] (max.)	Measuring frequency [MHz]	Thickness [mm] (inch)
				(max.)	(typ.)			
NM2520V1R0M	RoHS	1.0	±20%	0.13	0.10	1.1	1	1.2max (0.047max)
NM2520V2R2M	RoHS	2.2	+30%, -10%	0.22	0.18	0.9		

※) Rated current specifies that self-heat generation is below 40degC during DC loaded (at20degC).


\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

# ELECTRICAL CHARACTERISTICS


## DC Bias characteristics

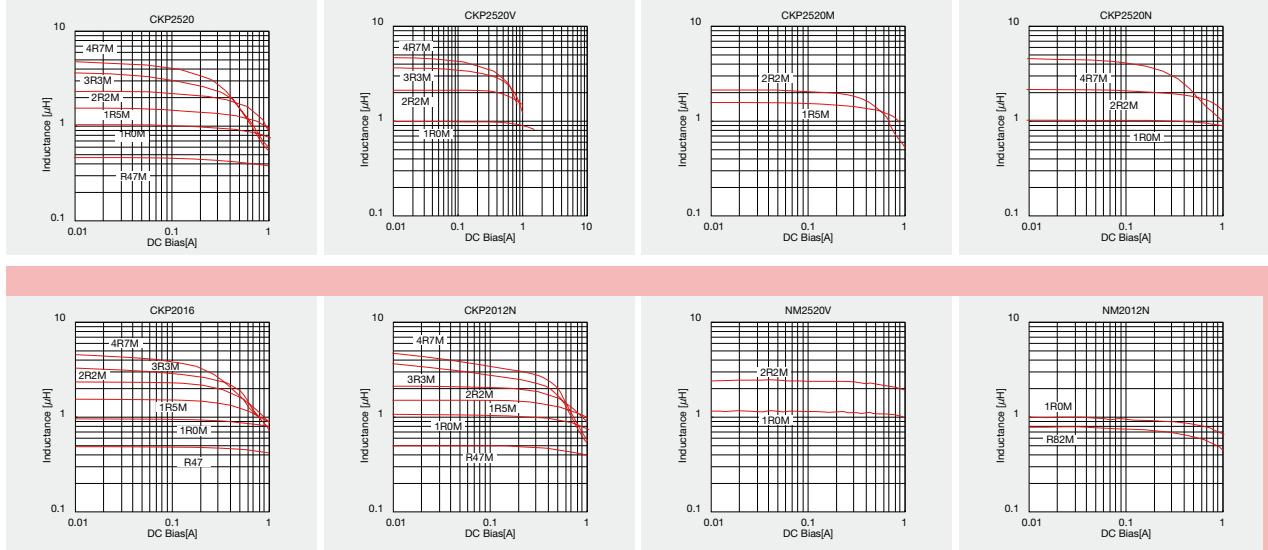

## Temperature characteristics



\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.



---

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.  
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

# MULTILAYER CHIP INDUCTOR FOR HIGH FREQUENCY (HK SERIES)



WAVE\* REFLOW

\*Except for HK0603, HK1005

## FEATURES

- Multilayer inductor made of advanced ceramics with low-resistivity silver used as internal conductors provides excellent Q and SRF characteristics.
- Designed to address surface mount inductor needs for applications above 100MHz.
- Multilayer block structure ensures outstanding reliability, high productivity and product quality.

## APPLICATIONS

- Portable telephones, PHS and W-LAN
- Miscellaneous high-frequency circuits
- EMI countermeasure in high-frequency circuits

## ORDERING CODE

H K △ 0 6 0 3 1 0 N J - T

1 Type  
HK Multilayer chip inductors for high frequency

2 External Dimensions (L×W) [mm]  
0603(0201) 0.6×0.3  
1005(0402) 1.0×0.5  
1608(0603) 1.6×0.8  
2125(0805) 2.0×1.2


3 Nominal Inductance [nH]  
example  
3N9 3.9  
10N 10  
R10 100  
R12 120  
\*R=decimal point  
\*N=0.0 (nH type)

4 Inductance Tolerances  
H ±3%  
J ±5%  
C ±0.2nH  
S ±0.3nH

5 Packaging  
-T Tape & Reel

## EXTERNAL DIMENSIONS/STANDARD QUANTITY

### HK Type



Type	L	W	T	e	Standard Quantity [pcs]	
					Paper Tape	Embossed Tape
HK0603 (0201)	0.6±0.03 (0.024±0.001)	0.3±0.03 (0.012±0.001)	0.3±0.03 (0.012±0.001)	0.15±0.05 (0.006±0.002)	15000	—
HK1005 (0402)	1.00±0.05 (0.039±0.002)	0.5±0.05 (0.020±0.002)	0.5±0.05 (0.020±0.002)	0.25±0.10 (0.010±0.004)	10000	—
HK1608 (0603)	1.6±0.15 (0.063±0.006)	0.8±0.15 (0.031±0.006)	0.8±0.15 (0.031±0.006)	0.3±0.2 (0.012±0.008)	4000	—
HK2125 (0805)	2.0 <sup>+0.3</sup> <sub>-0.1</sub> (0.079 <sup>+0.012</sup> <sub>-0.004</sub> )	1.25±0.2 (0.049±0.008)	0.85±0.2 (0.033±0.008)	0.5±0.3 (0.020±0.012)	—	4000
			1.0 <sup>+0.2</sup> <sub>-0.3</sub> (0.039 <sup>+0.008</sup> <sub>-0.012</sub> )		—	3000

Unit : mm (inch)

## AVAILABLE INDUCTANCE RANGE

Inductance [nH]	1.0	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6	6.8	8.2	10.0	12.0	15.0	18.0	22.0	27.0	33.0	39.0	47.0	56.0	68.0	82.0	100.0	120.0	150.0	180.0	220.0	270.0	330.0	390.0	470.0			
HK0603 (Imax. [mA])	1N0□	1N2□	1N5□	1N8□	2N2□	2N7□	3N3□	3N9□	4N7□	5N6□	6N8□	8N2□	10N□	12N□	15N□	18N□	22N□	27N□	33N□	39N□	47N□	56N□	68N□	82N□	R10□											
Operating temp.: -55~+125°C	470	450	430	390	360	340	320	300	280	260	250	230	220	190	180	170	150	120	110	100	100	80	80	70	60											
HK1005 (Imax. [mA])	1N0□	1N2□	1N5□	1N8□	2N2□	2N7□	3N3□	3N9□	4N7□	5N6□	6N8□	8N2□	10N□	12N□	15N□	18N□	22N□	27N□	33N□	39N□	47N□	56N□	68N□	82N□	R10□	R12□	R15□	R18□	R22□	R27□						
Operating temp.: -55~+125°C																																				
Operating temp.: -55~+85°C	900	900	850	700	700	650	550	500	500	430	430	380	340	330	320	310	300	300	250	250	230	220														
HK1608 (Imax. [mA])	1N0□	1N2□	1N5□	1N8□	2N2□	2N7□	3N3□	3N9□	4N7□	5N6□	6N8□	8N2□	10N□	12N□	15N□	18N□	22N□	27N□	33N□	39N□	47N□	56N□	68N□	82N□	R10□	R12□	R15□	R18□	R22□	R27□	R33□	R39□	R47□			
Operating temp.: -40~+85°C																																				
HK2125 (Imax. [mA])																																				
Operating temp.: -40~+85°C																																				

※ □, ○ mark indicates the inductance tolerance code. The product with tolerance less than ±0.3nH(□), ±5% (○) is also available. Please contact your local sales office.

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

**PART NUMBERS**

**HK0603**

Ordering code	EHS (Environmental Hazardous Substances)	Inductance (nH)	Q min.	LQ Measuring frequency [MHz]	Q(Typical) Frequency [MHz]					Self-resonant frequency [MHz]		Resistance DC (Ω)		Rated current (mA) max.	Thickness (mm) (inch)
					100	300	500	800	1000	min.	Typ.	max.	Typ.		
HK 0603 1N0□	RoHS	1.0±0.3nH ※	4	100	6	12	17	22	27	10000	>13000	0.11	0.088	470	0.30±0.03 (0.012±0.001)
HK 0603 1N2□	RoHS	1.2±0.3nH ※	4	100	6	12	16	21	25	10000	>13000	0.12	0.089	450	
HK 0603 1N5□	RoHS	1.5±0.3nH ※	4	100	6	12	15	20	23	10000	>13000	0.13	0.11	430	
HK 0603 1N8□	RoHS	1.8±0.3nH ※	4	100	6	12	15	20	23	10000	>13000	0.16	0.12	390	
HK 0603 2N0□	RoHS	2.0±0.3nH ※	4	100	6	12	15	20	22	10000	>13000	0.17	0.13	380	
HK 0603 2N2□	RoHS	2.2±0.3nH ※	4	100	6	12	15	20	22	8800	12500	0.19	0.14	360	
HK 0603 2N4□	RoHS	2.4±0.3nH ※	4	100	6	12	15	20	22	8300	11700	0.20	0.15	350	
HK 0603 2N7□	RoHS	2.7±0.3nH ※	5	100	7	12	15	20	22	7700	11000	0.21	0.16	340	
HK 0603 3N0□	RoHS	3.0±0.3nH ※	5	100	7	12	15	20	22	7200	11000	0.22	0.18	330	
HK 0603 3N3□	RoHS	3.3±0.3nH ※	5	100	7	12	15	20	22	6700	9600	0.23	0.19	320	
HK 0603 3N6□	RoHS	3.6±0.3nH ※	5	100	7	12	15	20	22	6400	9100	0.25	0.20	310	
HK 0603 3N9□	RoHS	3.9±0.3nH ※	5	100	7	12	15	20	22	6000	8600	0.27	0.20	300	
HK 0603 4N3□	RoHS	4.3±0.3nH ※	5	100	7	12	15	19	21	5700	8100	0.30	0.22	280	
HK 0603 4N7□	RoHS	4.7±0.3nH ※	5	100	7	12	15	19	21	5300	7600	0.30	0.24	280	
HK 0603 5N1□	RoHS	5.1±0.3nH ※	5	100	7	12	15	19	21	5000	7100	0.33	0.26	270	
HK 0603 5N6□	RoHS	5.6±0.3nH ※	5	100	7	12	15	19	21	4600	6600	0.36	0.27	260	
HK 0603 6N2□	RoHS	6.2±0.3nH ※	5	100	7	11	14	18	20	4200	6100	0.38	0.29	250	
HK 0603 6N8○	RoHS	6.8±5% ※	5	100	7	11	14	18	20	3900	5600	0.39	0.30	250	
HK 0603 7N5○	RoHS	7.5±5% ※	5	100	7	11	14	18	19	3600	5300	0.41	0.34	240	
HK 0603 8N2○	RoHS	8.2±5% ※	5	100	7	11	14	18	19	3400	4900	0.45	0.34	230	
HK 0603 9N1○	RoHS	9.1±5% ※	5	100	7	11	14	17	18	3200	4600	0.48	0.40	220	
HK 0603 10N○	RoHS	10±5% ※	5	100	7	11	14	17	18	2900	4200	0.51	0.41	220	
HK 0603 12N○	RoHS	12±5% ※	5	100	7	11	14	17	18	2700	3800	0.68	0.45	190	
HK 0603 15N○	RoHS	15±5% ※	5	100	7	11	13	16	17	2300	3300	0.71	0.5	180	
HK 0603 18N○	RoHS	18±5% ※	5	100	7	11	13	16	17	2100	3000	0.81	0.57	170	
HK 0603 22N○	RoHS	22±5% ※	5	100	7	11	13	15	16	1800	2600	1	0.71	150	
HK 0603 27N○	RoHS	27±5% ※	4	100	6	10	12	14	15	1800	2600	1.35	1.11	120	
HK 0603 33N○	RoHS	33±5% ※	4	100	6	10	12	14	14	1700	2400	1.47	1.33	110	
HK 0603 39N○	RoHS	39±5% ※	4	100	6	10	12	13	12	1500	2100	1.72	1.51	100	
HK 0603 47N○	RoHS	47±5% ※	4	100	6	10	11	12	11	1300	1800	1.90	1.74	100	
HK 0603 56N○	RoHS	56±5% ※	4	100	6	10	11	11	10	1100	1600	2.27	1.85	80	
HK 0603 68N○	RoHS	68±5% ※	4	100	6	10	11	11	10	1100	1500	2.66	2.30	80	
HK 0603 82N○	RoHS	82±5% ※	4	100	6	10	11	10	8	1000	1400	3.37	2.60	70	
HK 0603 R10○	RoHS	100±5% ※	4	100	6	9	10	9	6	900	1200	3.74	3.00	60	

※ □, ○ mark indicates the inductance tolerance code. The product with tolerance less than ±0.3nH(□), ±5%(○) is also available. Please contact your local sales office.

**HK1005**

Ordering code	EHS (Environmental Hazardous Substances)	Inductance (nH)	Q min.	LQ Measuring frequency [MHz]	Q(Typical) Frequency [MHz]					Self-resonant frequency [MHz]		Resistance DC (Ω)		Rated current (mA) max. -55~ +125°C -55~ +85°C	Thickness (mm) (inch)	
					100	300	500	800	1000	min.	Typ.	max.	Typ.			
HK 1005 1N0□	RoHS	1.0±0.3nH ※	8	100	11	25	34	43	52	10000	>13000	0.08	0.04	300	900	0.50±0.05 (0.020±0.002)
HK 1005 1N2□	RoHS	1.2±0.3nH ※	8	100	11	25	35	44	52	10000	>13000	0.09	0.04	300	900	
HK 1005 1N5□	RoHS	1.5±0.3nH ※	8	100	11	24	33	44	48	6000	>13000	0.1	0.05	300	850	
HK 1005 1N8□	RoHS	1.8±0.3nH ※	8	100	11	23	30	36	42	6000	11000	0.12	0.06	300	700	
HK 1005 2N0□	RoHS	2.0±0.3nH ※	8	100	11	21	27	34	39	6000	10500	0.12	0.06	300	700	
HK 1005 2N2□	RoHS	2.2±0.3nH ※	8	100	10	18	25	31	36	6000	10000	0.13	0.07	300	700	
HK 1005 2N4□	RoHS	2.4±0.3nH ※	8	100	10	18	24	31	35	6000	9500	0.13	0.07	300	650	
HK 1005 2N7□	RoHS	2.7±0.3nH ※	8	100	10	18	24	31	34	6000	9000	0.13	0.08	300	650	
HK 1005 3N0□	RoHS	3.0±0.3nH ※	8	100	10	18	24	31	35	6000	8500	0.16	0.09	300	600	
HK 1005 3N3□	RoHS	3.3±0.3nH ※	8	100	10	18	24	31	35	6000	8000	0.16	0.1	300	550	
HK 1005 3N6□	RoHS	3.6±0.3nH ※	8	100	10	18	24	31	35	5000	7500	0.2	0.11	300	500	
HK 1005 3N9□	RoHS	3.9±0.3nH ※	8	100	10	18	24	31	35	4000	7000	0.21	0.12	300	500	
HK 1005 4N3□	RoHS	4.3±0.3nH ※	8	100	10	18	24	31	35	4000	6500	0.2	0.12	300	500	
HK 1005 4N7□	RoHS	4.7±0.3nH ※	8	100	10	18	24	31	34	4000	6000	0.21	0.12	300	500	
HK 1005 5N1□	RoHS	5.1±0.3nH ※	8	100	10	18	24	31	34	4000	5800	0.21	0.13	300	450	
HK 1005 5N6□	RoHS	5.6±0.3nH ※	8	100	10	18	24	30	35	4000	5700	0.23	0.15	300	430	
HK 1005 6N2□	RoHS	6.2±0.3nH ※	8	100	10	18	24	30	34	3900	5600	0.25	0.16	300	430	
HK 1005 6N8○	RoHS	6.8±5% ※	8	100	10	18	23	29	32	3900	5500	0.25	0.17	300	430	
HK 1005 7N5○	RoHS	7.5±5% ※	8	100	10	18	23	29	32	3700	5200	0.25	0.18	300	400	
HK 1005 8N2○	RoHS	8.2±5% ※	8	100	10	18	23	29	31	3600	4900	0.28	0.21	300	380	
HK 1005 9N1○	RoHS	9.1±5% ※	8	100	10	18	23	29	31	3400	4500	0.3	0.22	300	360	
HK 1005 10N○	RoHS	10±5% ※	8	100	10	18	23	29	31	3200	4300	0.31	0.23	300	340	
HK 1005 12N○	RoHS	12±5% ※	8	100	11	18	23	29	31	2700	3900	0.4	0.28	300	330	
HK 1005 15N○	RoHS	15±5% ※	8	100	11	18	23	28	30	2300	3500	0.46	0.31	300	320	
HK 1005 18N○	RoHS	18±5% ※	8	100	11	18	23	28	30	2100	3100	0.55	0.35	300	310	
HK 1005 22N○	RoHS	22±5% ※	8	100	11	17	22	26	27	1900	2800	0.6	0.42	300	300	
HK 1005 27N○	RoHS	27±5% ※	8	100	11	17	21	25	26	1600	2300	0.7	0.47	300	300	
HK 1005 33N○	RoHS	33±5% ※	8	100	11	16	20	23	22	1300	1900	0.8	0.5	200	250	
HK 1005 39N○	RoHS	39±5% ※	8	100	11	16	20	23	21	1200	1700	0.9	0.52	200	250	
HK 1005 47N○	RoHS	47±5% ※	8	100	11	16	19	21	18	1000	1500	1	0.58	200	230	
HK 1005 56N○	RoHS	56±5% ※	8	100	11	16	18	18	16	750	1300	1	0.61	200	220	
HK 1005 68N○	RoHS	68±5% ※	8	100	11	15	17	18	11	750	1200	1.2	0.7	180	200	
HK 1005 82N○	RoHS	82±5% ※	8	100	10	14	16	15	6	600	1100	1.3	0.81	150	200	
HK 1005 R10○	RoHS	100±5% ※	8	100	10	14	14	12	—	600	1000	1.5	0.94	150	200	
HK 1005 R12○	RoHS	120±5% ※	8	100	10	12	10	—	—	600	800	1.6	1.1	150	200	
HK 1005 R15○	RoHS	150±5% ※	8	100	12	17	17	—	—	550	920	3.2	2.57	140	200	
HK 1005 R18○	RoHS	180±5% ※	8	100	12	16	—	—	—	500	810	3.7	2.97	130	200	
HK 1005 R22○	RoHS	220±5% ※	8	100	12	16	—	—	—	450	700	4.2	3.29	120	200	
HK 1005 R27○	RoHS	270±5% ※	8	100	12	14	—	—	—	400	600	4.8	3.92	110	200	

※ □, ○ mark indicates the inductance tolerance code. The product with tolerance less than ±0.3nH(□), ±5%(○) is also available. Please contact your local sales office.

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

FERRITE PRODUCTS

PART NUMBERS

● HK1608

Ordering code	EHS (Environmental Hazardous Substances)	Inductance (nH)	Q min.	LQ Measuring frequency [MHz]	Q(Typical) Frequency [MHz]					Self-resonant Frequency [MHz]		DC-Resistance (Ω)		Rated current (mA) max.	Thickness (mm) (inch)
					100	300	500	800	1000	min.	Typ.	max.	Typ.		
HK 1608 1N0□	RoHS	1.0±0.3nH ※	8	100	14	30	40	70	90	10000	>13000	0.05	0.015	300	0.8±0.15 (0.031±0.006)
HK 1608 1N2□	RoHS	1.2±0.3nH ※	8	100	14	30	40	70	90	10000	>13000	0.05	0.015	300	
HK 1608 1N5□	RoHS	1.5±0.3nH ※	8	100	14	26	34	47	50	6000	>13000	0.10	0.03	300	
HK 1608 1N8□	RoHS	1.8±0.3nH ※	8	100	10	18	24	30	34	6000	>13000	0.10	0.06	300	
HK 1608 2N2□	RoHS	2.2±0.3nH ※	8	100	12	22	29	37	40	6000	12000	0.10	0.06	300	
HK 1608 2N7□	RoHS	2.7±0.3nH ※	10	100	13	24	32	41	45	6000	11000	0.10	0.06	300	
HK 1608 3N3□	RoHS	3.3±0.3nH ※	10	100	14	25	33	42	47	6000	9000	0.12	0.06	300	
HK 1608 3N9□	RoHS	3.9±0.3nH ※	10	100	13	25	33	42	46	6000	8000	0.14	0.07	300	
HK 1608 4N7□	RoHS	4.7±0.3nH ※	10	100	13	25	33	42	47	4000	6500	0.16	0.08	300	
HK 1608 5N6□	RoHS	5.6±0.3nH ※	10	100	14	25	33	42	46	4000	5800	0.18	0.09	300	
HK 1608 6N8○	RoHS	6.8±5% ※	10	100	14	25	33	43	47	4000	5600	0.22	0.11	300	
HK 1608 8N2○	RoHS	8.2±5% ※	10	100	14	26	34	44	48	3500	5200	0.24	0.13	300	
HK 1608 10N○	RoHS	10±5% ※	12	100	14	26	34	43	47	3400	4600	0.26	0.16	300	
HK 1608 12N○	RoHS	12±5% ※	12	100	14	27	35	45	49	2600	4000	0.28	0.17	300	
HK 1608 15N○	RoHS	15±5% ※	12	100	15	28	37	46	51	2300	3400	0.32	0.20	300	
HK 1608 18N○	RoHS	18±5% ※	12	100	15	27	36	44	48	2000	3000	0.35	0.21	300	
HK 1608 22N○	RoHS	22±5% ※	12	100	16	28	36	44	47	1600	2900	0.40	0.25	300	
HK 1608 27N○	RoHS	27±5% ※	12	100	16	29	37	45	46	1400	2200	0.45	0.28	300	
HK 1608 33N○	RoHS	33±5% ※	12	100	17	31	40	46	47	1200	1800	0.55	0.35	300	
HK 1608 39N○	RoHS	39±5% ※	12	100	18	31	39	44	44	1100	1600	0.60	0.38	300	
HK 1608 47N○	RoHS	47±5% ※	12	100	17	28	34	35	34	900	1600	0.70	0.45	300	
HK 1608 56N○	RoHS	56±5% ※	12	100	17	28	34	34	31	900	1400	0.75	0.50	300	
HK 1608 68N○	RoHS	68±5% ※	12	100	18	29	34	30	22	700	1200	0.85	0.55	300	
HK 1608 82N○	RoHS	82±5% ※	12	100	18	28	33	27	—	600	1100	0.95	0.60	300	
HK 1608 R10○	RoHS	100±5% ※	12	100	18	27	28	16	—	600	1000	1.00	0.65	300	
HK 1608 R12○	RoHS	120±5% ※	8	50	16	24	23	—	—	500	800	1.20	0.68	300	
HK 1608 R15○	RoHS	150±5% ※	8	50	13	19	16	—	—	500	800	1.20	0.73	300	
HK 1608 R18○	RoHS	180±5% ※	8	50	13	18	12	—	—	400	700	1.30	0.85	300	
HK 1608 R22○	RoHS	220±5% ※	8	50	12	16	—	—	—	400	600	1.50	0.95	300	
HK 1608 R27○	RoHS	270±5% ※	8	50	14	15	—	—	—	400	550	1.9	1.34	150	
HK 1608 R33○	RoHS	330±5% ※	8	50	14	—	—	—	—	350	480	2.1	1.53	150	
HK 1608 R39○	RoHS	390±5% ※	8	50	13	—	—	—	—	350	410	2.3	1.72	150	
HK 1608 R47○	RoHS	470±5% ※	8	50	13	—	—	—	—	300	360	2.6	2.04	150	

※ □, ○ mark indicates the inductance tolerance code. The product with tolerance less than ±0.3nH(□), ±5%(○) is also available. Please contact your local sales office.


● HK2125

Ordering code	EHS (Environmental Hazardous Substances)	Inductance (nH)	Q min.	LQ Measuring frequency [MHz]	Q(Typical) Frequency [MHz]					Self-resonant Frequency [MHz]		DC-Resistance (Ω)		Rated current (mA) max.	Thickness (mm) (inch)
					100	300	500	800	1000	min.	Typ.	max.	Typ.		
HK 2125 1N5S	RoHS	1.5±0.3nH	10	100	21	39	57	61	68	4000	>6000	0.10	0.02	300	0.85±0.2 (0.033±0.008)
HK 2125 1N8S	RoHS	1.8±0.3nH	10	100	18	35	49	55	59	4000	>6000	0.10	0.02	300	
HK 2125 2N2S	RoHS	2.2±0.3nH	10	100	18	33	46	53	58	4000	>6000	0.10	0.03	300	
HK 2125 2N7S	RoHS	2.7±0.3nH	12	100	19	36	50	56	60	4000	>6000	0.10	0.03	300	
HK 2125 3N3S	RoHS	3.3±0.3nH	12	100	16	29	40	47	51	4000	>6000	0.13	0.04	300	
HK 2125 3N9S	RoHS	3.9±0.3nH	12	100	18	33	46	54	60	4000	>6000	0.15	0.05	300	
HK 2125 4N7S	RoHS	4.7±0.3nH	12	100	18	34	46	55	60	3500	>6000	0.20	0.05	300	
HK 2125 5N6S	RoHS	5.6±0.3nH	15	100	20	38	51	60	66	3200	5400	0.23	0.05	300	
HK 2125 6N8J	RoHS	6.8±5%	15	100	20	39	52	63	69	2800	4200	0.25	0.06	300	
HK 2125 8N2J	RoHS	8.2±5%	15	100	21	40	54	63	70	2400	3700	0.28	0.07	300	
HK 2125 10NJ	RoHS	10±5%	15	100	20	38	51	60	67	2100	3100	0.30	0.09	300	
HK 2125 12NJ	RoHS	12±5%	15	100	21	39	52	60	67	1900	3000	0.35	0.10	300	
HK 2125 15NJ	RoHS	15±5%	15	100	22	42	55	63	72	1600	2600	0.40	0.11	300	
HK 2125 18NJ	RoHS	18±5%	15	100	24	44	57	63	72	1500	2300	0.45	0.13	300	
HK 2125 22NJ	RoHS	22±5%	18	100	23	43	55	60	69	1400	2100	0.50	0.16	300	
HK 2125 27NJ	RoHS	27±5%	18	100	23	42	53	58	68	1300	1800	0.55	0.17	300	
HK 2125 33NJ	RoHS	33±5%	18	100	24	43	54	55	60	1200	1700	0.60	0.19	300	
HK 2125 39NJ	RoHS	39±5%	18	100	23	41	50	47	47	1000	1400	0.65	0.25	300	
HK 2125 47NJ	RoHS	47±5%	18	100	23	41	49	43	41	900	1200	0.70	0.26	300	
HK 2125 56NJ	RoHS	56±5%	18	100	23	42	48	39	38	800	1100	0.75	0.28	300	
HK 2125 68NJ	RoHS	68±5%	18	100	25	42	45	30	—	700	900	0.80	0.33	300	
HK 2125 82NJ	RoHS	82±5%	18	100	24	41	41	—	—	600	800	0.90	0.37	300	
HK 2125 R10J	RoHS	100±5%	18	100	23	37	37	—	—	600	800	0.90	0.40	300	
HK 2125 R12J	RoHS	120±5%	13	50	22	33	29	—	—	500	700	0.95	0.43	300	
HK 2125 R15J	RoHS	150±5%	13	50	22	34	26	—	—	500	700	1.00	0.46	300	
HK 2125 R18J	RoHS	180±5%	13	50	23	34	20	—	—	400	600	1.10	0.50	300	
HK 2125 R22J	RoHS	220±5%	12	50	20	23	—	—	—	350	550	1.20	0.75	300	
HK 2125 R27J	RoHS	270±5%	12	50	20	19	—	—	—	300	480	1.30	0.85	300	
HK 2125 R33J	RoHS	330±5%	12	50	22	15	—	—	—	250	400	1.40	0.90	300	
HK 2125 R39J	RoHS	390±5%	10	50	17	12	—	—	—	250	400	1.30	0.85	300	
HK 2125 R47J	RoHS	470±5%	10	50	17	—	—	—	—	200	350	1.50	0.95	300	

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.


Q-Characteristics

Measured by HP8719C

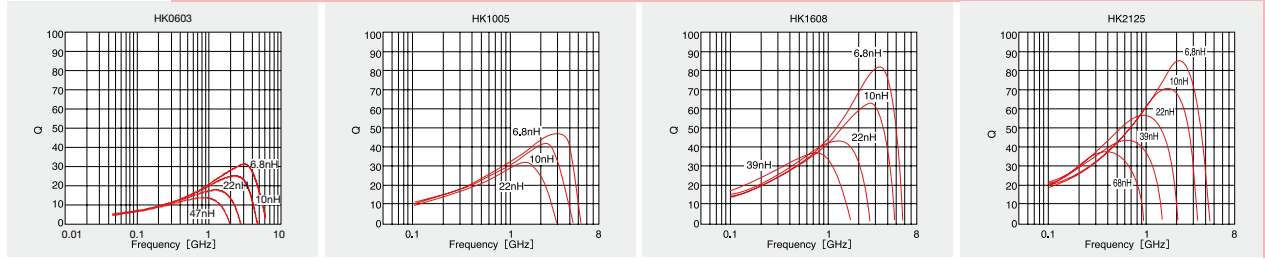


Impedance-vs-Frequency characteristics

Measured by HP8719C

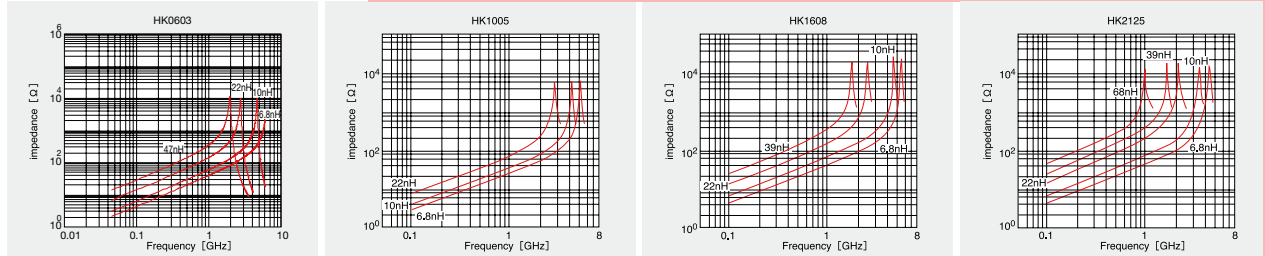

Inductance-vs-Frequency characteristics

Measured by HP8719C

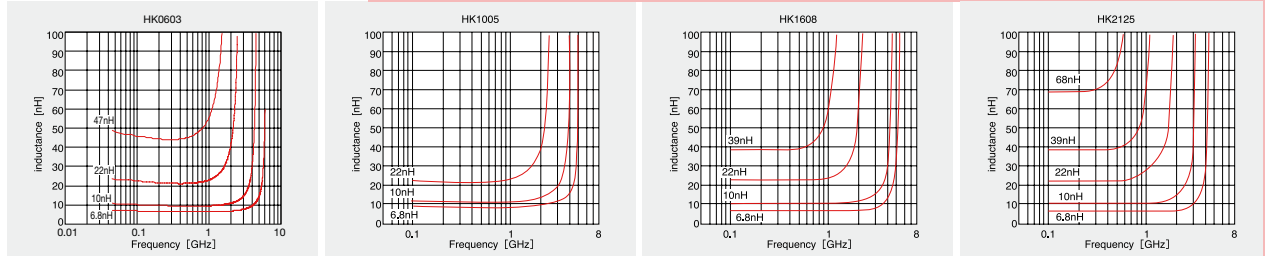

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

# MULTILAYER CHIP INDUCTOR FOR HIGH FREQUENCY (HKQ SERIES)



REFLOW

## FEATURES

- Multilayer inductor made of advanced ceramics with low-resistivity silver used as internal conductors provides excellent Q and SRF characteristics.
- Designed to address surface mount inductor needs for applications above 500MHz.
- Multilayer block structure ensures outstanding reliability, high productivity and product quality.

## APPLICATIONS

- Portable telephones, PHS and W-LAN
- Miscellaneous high-frequency circuits
- EMI countermeasure in high-frequency circuits

## ORDERING CODE

H K Q 0 6 0 3 S 1 0 N J - T

1

1 Type	
HKQ	Multilayer chip inductors for high frequency High Q Version

2

2 External Dimensions (L×W) [mm]	
0603(0201)	0.6×0.3

3

3 End termination	
S	Plated

4

4 Nominal Inductance [nH]	
Example	
3N9	3.9
10N	10

\*N=0.0(nH type)

5


5 Inductance Tolerances	
H	±3%
J	±5%
C	±0.2nH
S	±0.3nH

6

6 Packaging	
-T	Tape & Reel

## EXTERNAL DIMENSIONS/STANDARD QUANTITY

### HKQ Type



Type	L	W	T	e	Standard Quantity [pcs]	
					Paper Tape	Embossed Tape
HKQ0603S (0201)	0.6±0.03 (0.024±0.001)	0.3±0.03 (0.012±0.001)	0.3±0.03 (0.012±0.001)	0.1±0.05 (0.004±0.002)	15000	—

Unit : mm (inch)

\*Please Contact Our Sales Department office for Products Details.

## AVAILABLE INDUCTANCE RANGE

Inductance [nH]	0.6	0.7	0.8	0.9	1.0	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6	6.8	8.2	10.0	12.0	15.0	18.0	22.0
HKQ0603S (Imax. [mA])	0N6□	0N7□	0N8□	0N9□	1N0□	1N2□	1N5□	1N8□	2N2□	2N7□	3N3□	3N9□	4N7□	5N6□	6N8□	8N2○	10N○	12N○	15N○	18N○	22N○
Operating temp.: -55~+125°C	600	550	550	520	490	380	420	370	270	300	260	210	220	210	190	190	160	160	150	140	130

※ □, ○mark indicates the Inductance tolerance code. The product with tolerance less than ±0.3nH(□), ±5% (○) is also available. Please contact your local sales office.

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.



**PART NUMBERS**

**HKQ0603S**


Ordering code	EHS (Environmental Hazardous Substances)	Inductance (nH)	Tolerance	Q min.	LQ Measuring frequency [MHz]	Q (Typical) Frequency [Hz]					Self-resonant frequency (MHz)	Resistance DC (Ω)	Rated current (mA) max.	Thickness (mm) (inch)
						500M	800M	1.8G	2.0G	2.4G				
HKQ0603S 0N6□	RoHS	0.6	±0.3nH, ±0.2nH	13	500	>24	>31	>53	>56	>64	10000	0.06	600	
HKQ0603S 0N7□	RoHS	0.7	±0.3nH, ±0.2nH	13	500	>24	>31	>53	>56	>64	10000	0.07	550	
HKQ0603S 0N8□	RoHS	0.8	±0.3nH, ±0.2nH	13	500	>24	>31	>53	>56	>64	10000	0.07	550	
HKQ0603S 0N9□	RoHS	0.9	±0.3nH, ±0.2nH	13	500	>24	>31	>53	>56	>64	10000	0.08	520	
HKQ0603S 1N0□	RoHS	1	±0.3nH, ±0.2nH	13	500	24	31	53	56	64	10000	0.09	490	
HKQ0603S 1N1□	RoHS	1.1	±0.3nH, ±0.2nH	13	500	19	26	44	47	54	10000	0.12	420	
HKQ0603S 1N2□	RoHS	1.2	±0.3nH, ±0.2nH	13	500	19	25	42	44	51	10000	0.15	380	
HKQ0603S 1N3□	RoHS	1.3	±0.3nH, ±0.2nH	13	500	19	25	40	42	47	10000	0.19	330	
HKQ0603S 1N4□	RoHS	1.4	±0.3nH, ±0.2nH	13	500	19	24	39	41	47	10000	0.11	440	
HKQ0603S 1N5□	RoHS	1.5	±0.3nH, ±0.2nH	13	500	19	24	39	41	46	10000	0.12	420	
HKQ0603S 1N6□	RoHS	1.6	±0.3nH, ±0.2nH	13	500	19	24	39	41	46	10000	0.13	410	
HKQ0603S 1N7□	RoHS	1.7	±0.3nH, ±0.2nH	13	500	19	24	39	41	46	10000	0.15	380	
HKQ0603S 1N8□	RoHS	1.8	±0.3nH, ±0.2nH	13	500	18	24	39	41	46	10000	0.16	370	
HKQ0603S 1N9□	RoHS	1.9	±0.3nH, ±0.2nH	13	500	18	23	38	40	45	10000	0.20	330	
HKQ0603S 2N0□	RoHS	2	±0.3nH, ±0.2nH	13	500	17	23	37	39	44	10000	0.24	300	
HKQ0603S 2N1□	RoHS	2.1	±0.3nH, ±0.2nH	13	500	17	23	37	39	44	10000	0.26	290	
HKQ0603S 2N2□	RoHS	2.2	±0.3nH, ±0.2nH	13	500	17	23	37	39	43	10000	0.28	270	
HKQ0603S 2N3□	RoHS	2.3	±0.3nH, ±0.2nH	13	500	17	23	36	38	43	10000	0.30	270	
HKQ0603S 2N4□	RoHS	2.4	±0.3nH, ±0.2nH	13	500	17	22	36	38	42	10000	0.32	260	
HKQ0603S 2N5□	RoHS	2.5	±0.3nH, ±0.2nH	13	500	17	22	34	35	39	9500	0.20	330	
HKQ0603S 2N6□	RoHS	2.6	±0.3nH, ±0.2nH	13	500	17	22	33	35	39	9300	0.22	310	
HKQ0603S 2N7□	RoHS	2.7	±0.3nH, ±0.2nH	13	500	17	22	33	35	39	9100	0.24	300	
HKQ0603S 2N8□	RoHS	2.8	±0.3nH, ±0.2nH	13	500	17	22	33	35	39	8900	0.25	290	
HKQ0603S 2N9□	RoHS	2.9	±0.3nH, ±0.2nH	13	500	17	22	33	35	39	8700	0.28	270	
HKQ0603S 3N0□	RoHS	3	±0.3nH, ±0.2nH	13	500	17	22	33	35	39	8600	0.28	270	
HKQ0603S 3N1□	RoHS	3.1	±0.3nH, ±0.2nH	13	500	17	22	33	35	39	8400	0.29	270	
HKQ0603S 3N2□	RoHS	3.2	±0.3nH, ±0.2nH	13	500	17	22	33	35	39	8200	0.30	270	
HKQ0603S 3N3□	RoHS	3.3	±0.3nH, ±0.2nH	13	500	17	22	33	35	39	8100	0.32	260	
HKQ0603S 3N4□	RoHS	3.4	±0.3nH, ±0.2nH	13	500	16	22	33	35	39	8000	0.36	240	
HKQ0603S 3N5□	RoHS	3.5	±0.3nH, ±0.2nH	13	500	16	22	33	35	39	7800	0.40	230	
HKQ0603S 3N6□	RoHS	3.6	±0.3nH, ±0.2nH	13	500	16	22	33	35	39	7700	0.41	230	
HKQ0603S 3N7□	RoHS	3.7	±0.3nH, ±0.2nH	13	500	16	22	33	35	38	7600	0.44	220	
HKQ0603S 3N8□	RoHS	3.8	±0.3nH, ±0.2nH	13	500	16	22	33	35	38	7500	0.48	210	
HKQ0603S 3N9□	RoHS	3.9	±0.3nH, ±0.2nH	13	500	16	22	33	35	38	7300	0.48	210	
HKQ0603S 4N3□	RoHS	4.3	±0.3nH, ±0.2nH	13	500	16	21	32	34	37	6500	0.39	230	
HKQ0603S 4N7□	RoHS	4.7	±0.3nH, ±0.2nH	13	500	16	21	32	34	37	6200	0.44	220	
HKQ0603S 5N1□	RoHS	5.1	±0.3nH, ±0.2nH	13	500	16	21	32	34	37	5900	0.49	210	
HKQ0603S 5N6□	RoHS	5.6	±0.3nH, ±0.2nH	13	500	16	21	32	34	37	5500	0.47	210	
HKQ0603S 6N2□	RoHS	6.2	±0.3nH, ±0.2nH	13	500	16	21	32	33	36	5100	0.52	200	
HKQ0603S 6N8○	RoHS	6.8	±5%, ±3%	13	500	16	21	31	32	35	4800	0.55	190	
HKQ0603S 7N5○	RoHS	7.5	±5%, ±3%	13	500	16	20	30	32	34	4600	0.51	200	
HKQ0603S 8N2○	RoHS	8.2	±5%, ±3%	13	500	16	20	30	31	33	4300	0.57	190	
HKQ0603S 9N1○	RoHS	9.1	±5%, ±3%	13	500	16	20	30	30	32	4000	0.73	170	
HKQ0603S 10N○	RoHS	10	±5%, ±3%	13	500	16	20	28	29	31	3800	0.85	160	
HKQ0603S 12N○	RoHS	12	±5%, ±3%	12	500	16	20	27	27	27	3300	0.85	160	
HKQ0603S 15N○	RoHS	15	±5%, ±3%	12	500	15	19	24	24	23	2600	0.89	150	
HKQ0603S 18N○	RoHS	18	±5%, ±3%	11	500	15	19	23	23	21	2300	1.05	140	
HKQ0603S 22N○	RoHS	22	±5%, ±3%	10	500	15	19	22	22	19	1900	1.29	130	

0.3±0.03  
(0.012±0.001)

FERRITE PRODUCTS

※ □, ○ mark indicates the Inductance tolerance code.

**ELECTRICAL CHARACTERISTICS**

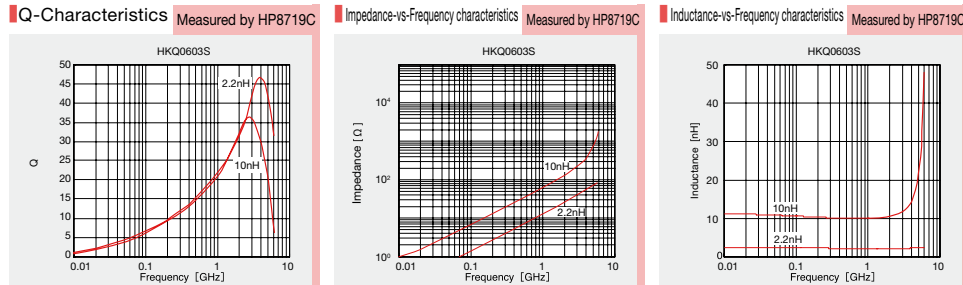

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

# MULTILAYER CHIP INDUCTOR FOR HIGH FREQUENCY (HIGH Q TYPE AQ SERIES)



REFLOW

## FEATURES

- High frequency inductors with high Q and high SRF suitable for high frequency circuit.
- Easy mounting and heat-resistance suitable for replacement of wire-wound inductors.
- E24 series lineup in a range from 2nH to 10nH makes circuit design easy.
- Monolithic structure provides high-reliability.

## APPLICATIONS

- Mobile telephone, Wireless LAN
- High frequency module
- Tuner
- High-frequency circuits

## ORDERING CODE

A Q 1 0 5 1 0 N J - T

**1 Type**

AQ Chip inductors for high frequency High Q type

**2 External Dimensions (mm)**

105(0402)	1.0×0.6
-----------	---------

**3 Nominal Inductance (nH)**

Example	
3N9	3.9
10N	10

\*N=0.0(nH type)

**4 Inductance Tolerances**


H	±3%
J	±5%
C	±0.2nH
S	±0.3nH

**5 Packaging**

-T	Tape & Reel
----	-------------

## EXTERNAL DIMENSIONS/STANDARD QUANTITY

### AQ Type



Type	L	W	T	e	Standard Quantity [pcs]	
					Paper Tape	Embossed Tape
AQ105 (0402)	1.0±0.05 (0.039±0.002)	0.6±0.1 (0.024±0.004)	0.5±0.05 (0.020±0.002)	0.175±0.075 (0.007±0.003)	10000	-

Unit : mm (inch)

## AVAILABLE INDUCTANCE RANGE

Inductance [nH]	1.0	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6	6.8	8.2	10.0	12.0	15.0
AQ105 (Imax. [mA])	1N0□	1N2□	1N5□	1N8□	2N2□	2N7□	3N3□	3N9□	4N7□	5N6□	6N8○	8N2○	10N○	12N○	15N○
Operating temp.: -55~+125°C	710	710	710	710	660	630	540	490	450	420	390	360	330	300	280
Operating temp.: -55~+85°C	930	930	930	930	870	820	710	630	590	550	510	470	440	390	360

\* □, ○ mark indicates the Inductance tolerance code. The product with tolerance less than ±0.3nH(□), ±5% (○) is also available. Please contact your local sales office.

## PART NUMBERS


### AQ105

Ordering code	EHS (Environmental Hazardous Substances)	Inductance [nH]	Q min.	LQ Measuring frequency [MHz]	Q (Typical) Frequency [MHz]					Self-resonant frequency [MHz]		DC Resistance [Ω]		Rated current [mA] max.	Thickness [mm] (inch)
					300	800	900	1500	1800	min.	Typ.	max.	Typ.		
AQ 105 1N0□	RoHS	1.0±0.3nH	8	100	53	129	147	217	244	10000	>13000	0.07	0.014	710	930
AQ 105 1N2□	RoHS	1.2±0.3nH	8	100	45	97	110	156	177	10000	>13000	0.07	0.016	710	930
AQ 105 1N5□	RoHS	1.5±0.3nH	8	100	35	69	76	104	116	8000	>13000	0.07	0.030	710	930
AQ 105 1N8□	RoHS	1.8±0.3nH	8	100	32	61	66	92	100	6000	11000	0.07	0.035	710	930
AQ 105 2N0□	RoHS	2.0±0.3nH	8	100	38	68	73	94	103	6000	10500	0.08	0.035	660	870
AQ 105 2N2□	RoHS	2.2±0.3nH	8	100	37	67	71	92	101	6000	10000	0.08	0.040	660	870
AQ 105 2N4□	RoHS	2.4±0.3nH	8	100	34	54	59	74	86	6000	9600	0.09	0.050	630	820
AQ 105 2N7□	RoHS	2.7±0.3nH	8	100	30	49	52	67	73	6000	9200	0.09	0.060	630	820
AQ 105 3N0□	RoHS	3.0±0.3nH	8	100	31	51	54	70	76	6000	8700	0.11	0.070	570	740
AQ 105 3N3□	RoHS	3.3±0.3nH	8	100	32	54	57	72	79	6000	8300	0.12	0.075	540	710
AQ 105 3N6□	RoHS	3.6±0.3nH	8	100	33	53	56	71	77	5000	7800	0.14	0.080	500	650
AQ 105 3N9□	RoHS	3.9±0.3nH	8	100	34	53	56	70	76	4000	7300	0.15	0.085	490	630
AQ 105 4N3□	RoHS	4.3±0.3nH	8	100	29	47	50	64	71	4000	6900	0.16	0.090	470	610
AQ 105 4N7□	RoHS	4.7±0.3nH	8	100	30	48	51	65	72	4000	6400	0.17	0.095	450	590
AQ 105 5N1□	RoHS	5.1±0.3nH	8	100	30	48	51	64	71	4000	6300	0.19	0.110	430	560
AQ 105 5N6□	RoHS	5.6±0.3nH	8	100	30	48	51	65	71	4000	6200	0.20	0.120	420	550
AQ 105 6N2□	RoHS	6.2±0.3nH	8	100	31	49	52	66	72	3900	6100	0.22	0.130	400	520
AQ 105 6N8○	RoHS	6.8±5%	8	100	28	44	49	59	64	3900	6000	0.23	0.130	390	510
AQ 105 7N5○	RoHS	7.5±5%	8	100	28	45	50	60	65	3700	5500	0.25	0.135	370	490
AQ 105 8N2○	RoHS	8.2±5%	8	100	29	46	50	62	66	3600	5000	0.27	0.140	360	470
AQ 105 9N1○	RoHS	9.1±5%	8	100	29	45	49	59	62	3400	4800	0.29	0.150	350	450
AQ 105 10N○	RoHS	10±5%	8	100	28	45	48	57	60	3200	4500	0.31	0.165	330	440
AQ 105 12N○	RoHS	12±5%	8	100	26	40	45	51	52	2700	4300	0.39	0.165	300	390
AQ 105 15N○	RoHS	15±5%	8	100	25	38	42	49	51	2300	4100	0.45	0.190	280	360


\* □, ○ mark indicates the Inductance tolerance code. The product with tolerance less than ±0.3nH(□), ±5% (○) is also available. Please contact your local sales office.

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.



Q-Characteristics Measured by HP8719C



Impedance-vs-Frequency characteristics Measured by HP8719C



Inductance-vs-Frequency characteristics Measured by HP8719C



\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.





# PACKAGING

## ① Minimum Quantity

### ● Tape & Reel Packaging

Type	Thickness [mm] (inch)	Standard Quantity [pcs]	
		Paper Tape	Embossed Tape
CK1608(0603)	0.8 (0.031)	4000	—
CK2125(0805)	0.85 (0.033)	4000	—
	1.25 (0.049)	—	2000
CKS2125(0805)	0.85 (0.033)	4000	—
	1.25 (0.049)	—	2000
CKP2012(0805)	0.9 (0.035)	—	3000
CKP2016(0806)	0.9 (0.035)	—	3000
CKP2520(1008)	0.7 (0.028)	—	3000
	0.9 (0.035)	—	3000
	1.1 (0.043)	—	2000
NM2012(0805)	0.9 (0.035)	—	3000
NM2520(1008)	1.1 (0.043)	—	2000
LK1005(0402)	0.5 (0.020)	10000	—
LK1608(0603)	0.8 (0.031)	4000	—
LK2125(0805)	0.85 (0.033)	4000	—
	1.25 (0.049)	—	2000
HK0603(0201)	0.3 (0.012)	15000	—
HK1005(0402)	0.5 (0.020)	10000	—
HK1608(0603)	0.8 (0.031)	4000	—
HK2125(0805)	0.85 (0.033)	—	4000
	1.0 (0.039)	—	3000
HKQ0603S(0201)	0.3 (0.012)	15000	—
AQ105(0402)	0.5 (0.020)	10000	—
BK0402(01005)	0.2 (0.008)	20000	—
BK0603(0201)	0.3 (0.012)	15000	—
BK1005(0402)	0.5 (0.020)	10000	—
BK1608(0603)	0.8 (0.031)	4000	—
BK2125(0805)	0.85 (0.033)	4000	—
	1.25 (0.049)	—	2000
BK2010(0804)	0.45 (0.018)	4000	—
BK3216(1206)	0.8 (0.031)	—	4000
BKP0603(0201)	0.3 (0.012)	15000	—
BKP1005(0402)	0.5 (0.020)	10000	—
BKP1608(0603)	0.8 (0.031)	4000	—
BKP2125(0805)	0.85 (0.033)	4000	—

## ② Taping material




CK	1608
CK	2125
CK S	2125
LK	1005
LK	1608
LK	2125
HK	0603
HK	1005
HK	1608
HK Q	0603
AQ	105
BK	0402
BK	0603
BK	1005
BK	1608
BK	2125
BK	2010
BK P	0603
BK P	1005
BK P	1608
BK P	2125

CK	2125
CK S	2125
CK P	2012
CK P	2016
CK P	2520
NM	2012
NM	2520
LK	2125
HK	2125
BK	2125
BK	3216

## ③ Taping Dimensions

### ● Paper tape (0.315 inches wide)

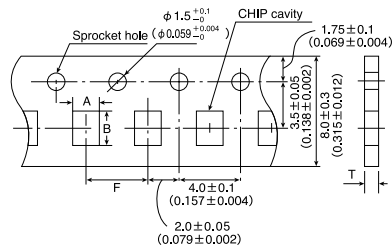

Unit : mm (inch)

Type	Thickness (mm) (inch)	Chip cavity		Insertion Pitch F	Tape Thickness T
		A	B		
CK1608(0603)	0.8 (0.031)	1.0±0.2 (0.039±0.008)	1.8±0.2 (0.071±0.008)	4.0±0.1 (0.157±0.004)	1.1m a x (0.043max)
CK2125(0805)	0.85 (0.033)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	1.1m a x (0.043max)
	0.85 (0.033)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	1.1m a x (0.043max)
CKS2125(0805)	0.85 (0.033)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	1.1m a x (0.043max)
LK1005(0402)	0.5 (0.020)	0.65±0.1 (0.026±0.004)	1.15±0.1 (0.045±0.004)	2.0±0.05 (0.079±0.002)	0.8m a x (0.031max)
LK1608(0603)	0.8 (0.031)	1.0±0.2 (0.039±0.008)	1.8±0.2 (0.071±0.008)	4.0±0.1 (0.157±0.004)	1.1m a x (0.043max)
LK2125(0805)	0.85 (0.033)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	1.1m a x (0.043max)
	0.85 (0.033)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	1.1m a x (0.043max)
HK0603(0201)	0.3 (0.012)	0.40±0.06 (0.016±0.002)	0.70±0.06 (0.028±0.002)	2.0±0.05 (0.079±0.002)	0.45m a x (0.018max)
HK1005(0402)	0.5 (0.020)	0.65±0.1 (0.026±0.004)	1.15±0.1 (0.045±0.004)	2.0±0.05 (0.079±0.002)	0.8m a x (0.031max)
HK1608(0603)	0.8 (0.031)	1.0±0.2 (0.039±0.008)	1.8±0.2 (0.071±0.008)	4.0±0.1 (0.157±0.004)	1.1m a x (0.043max)
HKQ0603S(0201)	0.3 (0.012)	0.40±0.06 (0.016±0.002)	0.70±0.06 (0.028±0.002)	2.0±0.05 (0.079±0.002)	0.45m a x (0.018max)
	0.5 (0.020)	0.75±0.1 (0.030±0.004)	1.15±0.1 (0.045±0.004)	2.0±0.05 (0.079±0.002)	0.8m a x (0.031max)
AQ105(0402)	0.5 (0.020)	0.75±0.1 (0.030±0.004)	1.15±0.1 (0.045±0.004)	2.0±0.05 (0.079±0.002)	0.8m a x (0.031max)
BK0402(01005)	0.2 (0.008)	0.25±0.04 (0.010±0.002)	0.45±0.04 (0.018±0.002)	2.0±0.05 (0.079±0.002)	0.36m a x (0.014max)
BK0603(0201)	0.3 (0.012)	0.40±0.06 (0.016±0.002)	0.70±0.06 (0.028±0.002)	2.0±0.05 (0.079±0.002)	0.45m a x (0.018max)
	0.3 (0.012)	0.40±0.06 (0.016±0.002)	0.70±0.06 (0.028±0.002)	2.0±0.05 (0.079±0.002)	0.45m a x (0.018max)

To next page


\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

**PACKAGING**

Type	Thickness (mm) (inch)	Chip cavity		Insertion Pitch F	Tape Thickness	
		A	B		T	T
BK1005(0402)	0.5 (0.020)	0.65±0.1 (0.026±0.004)	1.15±0.1 (0.045±0.004)	2.0±0.05 (0.079±0.002)	0.8max (0.031max)	
BK1608(0603)	0.8 (0.031)	1.0±0.2 (0.039±0.008)	1.8±0.2 (0.071±0.008)	4.0±0.1 (0.157±0.004)	1.1max (0.043max)	
BK2125(0805)	0.85 (0.033)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	1.1max (0.043max)	
BK2010(0804)	0.45 (0.018)	1.2±0.1 (0.047±0.004)	2.17±0.1 (0.085±0.004)	4.0±0.1 (0.157±0.004)	0.8max (0.031max)	
BKP0603(0201)	0.3 (0.012)	0.40±0.06 (0.016±0.002)	0.70±0.06 (0.028±0.002)	2.0±0.05 (0.079±0.002)	0.45max (0.018max)	
BKP1005(0402)	0.5 (0.020)	0.65±0.1 (0.026±0.004)	1.15±0.1 (0.045±0.004)	2.0±0.05 (0.079±0.002)	0.8max (0.031max)	
BKP1608(0603)	0.8 (0.031)	1.0±0.2 (0.039±0.008)	1.8±0.2 (0.071±0.008)	4.0±0.1 (0.157±0.004)	1.1max (0.043max)	
BKP2125(0805)	0.85 (0.033)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	1.1max (0.043max)	


Unit : mm (inch)

● Embossed Tape (0.315 inches wide)

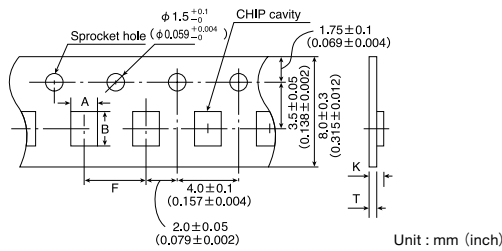


Type	Thickness (mm) (inch)	Chip cavity		Insertion Pitch F	Tape Thickness	
		A	B		K	T
CK2125(0805)	1.25 (0.049)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	2.0 (0.079)	0.3 (0.012)
CKS2125(0805)	1.25 (0.049)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	2.0 (0.079)	0.3 (0.012)
CKP2012(0805)	0.9 (0.035)	1.55±0.2 (0.061±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	1.3 (0.051)	0.3 (0.012)
CKP2016(0806)	0.9 (0.035)	1.8±0.1 (0.071±0.004)	2.2±0.1 (0.087±0.004)	4.0±0.1 (0.157±0.004)	1.3 (0.051)	0.25 (0.01)
CKP2520(1008)	0.7 (0.028)	2.3±0.1 (0.091±0.004)	2.8±0.1 (0.110±0.004)	4.0±0.1 (0.157±0.004)	1.4 (0.055)	0.3 (0.012)
	0.9 (0.035)				1.4 (0.055)	
	1.1 (0.043)				1.7 (0.067)	
NM2012(0805)	0.9 (0.035)	1.55±0.2 (0.061±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	1.3 (0.051)	0.3 (0.012)
NM2520(1008)	1.1 (0.043)	2.3±0.1 (0.091±0.004)	2.8±0.1 (0.110±0.004)	4.0±0.1 (0.157±0.004)	1.7 (0.067)	0.3 (0.012)
LK2125(0805)	1.25 (0.049)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	2.0 (0.079)	0.3 (0.012)
HK2125(0805)	0.85 (0.033)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	1.5 (0.059)	0.3 (0.012)
	1.0 (0.039)				2.0 (0.079)	
BK2125(0805)	1.25 (0.049)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	2.0 (0.079)	0.3 (0.012)
BK3216(1206)	0.8 (0.031)	1.9±0.1 (0.075±0.004)	3.5±0.1 (0.138±0.004)	4.0±0.1 (0.157±0.004)	1.4 (0.055)	0.3 (0.012)

④ LEADER AND BLANK PORTION

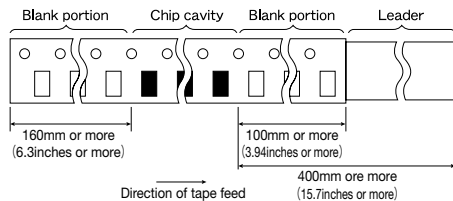


⑤ Reel Size

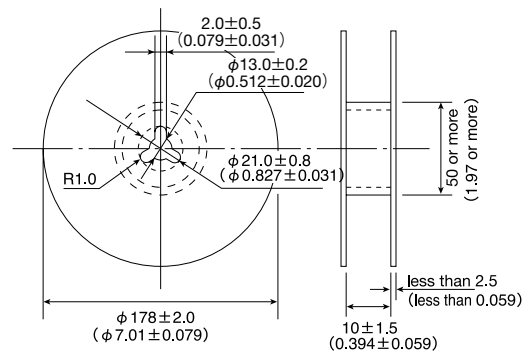

⑥ Top tape strength

The top tape requires a peel-off force of 0.1~0.7N in the direction of the arrow as illustrated below.



\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

## RELIABILITY DATA

### Multilayer chip inductors and beads

#### 1. Operating Temperature Range

BK0402	
BK0603	
BK1005	
BK1608	-55~+125°C
BK2125	
ARRAY	BK2010
	BK3216
BKP0603	
BKP1005	-55~+85°C
BKP1608	
BKP2125	
CK1608	
CK2125	
CKS2125	
CKP2012	
CKP2016	
CKP2520	-40~+85°C
NM2012	
NM2520	
LK1005	
LK1608	
LK2125	
HK0603	-55~+125°C
HK1005	
HK1608	-40~+85°C
HK2125	
HKQ0603S	-55~+125°C
AQ105	

#### 2. Storage Temperature Range

BK0402	
BK0603	
BK1005	
BK1608	-55~+125°C
BK2125	
ARRAY	BK2010
	BK3216
BKP0603	
BKP1005	-55~+85°C
BKP1608	
BKP2125	
CK1608	
CK2125	
CKS2125	
CKP2012	
CKP2016	
CKP2520	-40~+85°C
NM2012	
NM2520	
LK1005	
LK1608	
LK2125	
HK0603	-55~+125°C
HK1005	
HK1608	-40~+85°C
HK2125	
HKQ0603S	-55~+125°C
AQ105	

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.  
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

## RELIABILITY DATA

### Multilayer chip inductors and beads

3. Rated Current		
BK0402	240~540mA DC	
BK0603	100~500mA DC	
BK1005	120~1000mA DC	
BK1608	150~1500mA DC	
BK2125	200~1200mA DC	
ARRAY	BK2010	100mA DC
	BK3216	100~200mA DC
BKP0603	1.0A DC	
BKP1005	800~2000mA DC	
BKP1608	1.0~3.0A DC	
BKP2125	1.5~4.0A DC	
CK1608	50~60mA DC	
CK2125	60~500mA DC	
CKS2125	110~280mA DC	
CKP2012	0.7~1.2A DC	
CKP2016	0.9~1.6A DC	
CKP2520	1.1~1.8A DC	
NM2012	0.8~1.5A DC	
NM2520	0.9~1.1A DC	
LK1005	20~25mA DC	
LK1608	1~150mA DC	
LK2125	5~300mA DC	
HK0603	60~470mA DC	
HK1005	110~300mA DC	
HK1608	150~300mA DC	
HK2125	300mA DC	
HKQ0603S	130~600mA DC	
AQ105	280~710mA DC	

#### Definition of rated current :

- In the CK, CKS and BK Series, the rated current is the value of current at which the temperature of the element is increased within 20°C.
- In the BK Series P type and CK Series P type, NM Series the rated current is the value of current at which the temperature of the element is increased within 40°C.
- In the LK, HK, HKQ, and AQ Series, the rated current is either the DC value at which the internal L value is decreased within 5% with the application of DC bias, or the value of current at which the temperature of the element is increased within 20°C.

4. Impedance		
BK0402	10~120Ω ±25%	
BK0603	10~600Ω ±25%	
BK1005	10~1800Ω ±25%	
BK1608	22~2500Ω ±25%	
BK2125	15~2500Ω ±25%	
ARRAY	BK2010	5~1000Ω ±25%
	BK3216	68~1000Ω ±25%
BKP0603	22~33Ω ±25%	
BKP1005	10~220Ω ±25%	
BKP1608	33~470Ω ±25%	
BKP2125	33~330Ω ±25%	
CK1608		
CK2125		
CKS2125		
CKP2012		
CKP2016		
CKP2520		
NM2012		
NM2520		
LK1005		
LK1608		
LK2125		
HK0603		
HK1005		
HK1608		
HK2125		
HKQ0603S		
AQ105		

#### [Test Methods and Remarks]

##### BK0402 Series

Measuring frequency : 100±1MHz  
 Measuring equipment : HP4991A (or its equivalent)  
 Measuring jig : 16196D (or its equivalent)

##### BK0603 Series, BKP0603 Series

Measuring frequency : 100±1MHz  
 Measuring equipment : HP4291A (or its equivalent)  
 Measuring jig : 16193A (or its equivalent)

##### BK1005 Series, BKP1005 Series

Measuring frequency : 100±1MHz  
 Measuring equipment : HP4291A (or its equivalent)  
 Measuring jig : 16192A (or its equivalent), 16193A (or its equivalent)

##### BK1608·2125 Series, BKP1608·2125 Series

Measuring frequency : 100±1MHz  
 Measuring equipment : HP4291A (or its equivalent), HP4195A (or its equivalent)  
 Measuring jig : 16092A (or its equivalent) or 16192A (or its equivalent)/HW

##### BK2010·3216 Series

Measuring frequency : 100±1MHz  
 Measuring equipment : HP4291A (or its equivalent), HP4195A (or its equivalent)  
 Measuring jig : 16192A (or its equivalent)

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.  
 For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

**RELIABILITY DATA**

Multilayer chip inductors and beads

5. Inductance		
BK0402		
BK0603		
BK1005		
BK1608		
BK2125		
ARRAY	BK2010	
	BK3216	
BKP0603		
BKP1005		
BKP1608		
BKP2125		
CK1608	4.7~10.0μH : ±20%	
CK2125	0.1~10.0μH : ±20%	
CKS2125	1.0~10.0μH : ±20%	
CKP2012	0.47~4.7μH : ±20%	
CKP2016	0.47~4.7μH : ±20%	
CKP2520	0.47~4.7μH : ±20%	
NM2012	0.82~1.0μH : ±20%	
NM2520	1.0~2.2μH : ±20%	
LK1005	0.12~2.2μH : ±10% Q 0.12~2.2μH : ±30%	
LK1608	0.047~33.0μH : ±20% 0.10~12.0μH : ±10% Q 0.12~2.2μH : ±30%	
LK2125	0.047~33.0μH : ±20% 0.10~12.0μH : ±10% Q 0.12~2.2μH : ±30%	
HK0603	1.0~6.2nH : ±0.3nH 6.8~100nH : ±5%	
HK1005	1.0~6.2nH : ±0.3nH 6.8~270nH : ±5%	
HK1608	1.0~5.6nH : ±0.3nH 6.8~470nH : ±5%	
HK2125	1.5~5.6nH : ±0.3nH 6.8~470nH : ±5%	
HKQ0603S	0.6~6.2nH : ±0.3nH 6.8~22nH : ±5%	
AQ105	1.0~6.2nH : ±0.3nH 6.8~15nH : ±5%	

**[Test Methods and Remarks]**

**CK Series :**

- Measuring frequency : 2 to 4MHz (CK1608)
- Measuring frequency : 2 to 25MHz (CK2125)
- Measuring frequency : 2 to 10MHz (CKS2125)

**LK Series :**

- Measuring frequency : 10 to 25MHz (LK1005)
- Measuring frequency : 1 to 50MHz (LK1608)
- Measuring frequency : 0.4 to 50MHz (LK2125)

**CKP Series, NM Series :**

- Measuring frequency : 1MHz(CKP2012, CKP2016, CKP2520, NM2012・NM2520)
- Measuring equipment, jig :
  - ・HP4194A+16085B+16092A(or its equivalent)
  - ・HP4195A+41951+16092A(or its equivalent)
  - ・HP4294A+16192A(or its equivalent)
  - ・HP4291A+16193A(or its equivalent)/LK1005
  - ・HP4285A+42841A+42842C+42851—61100(CKP2012・CKP2016・CKP2520・NM2012・NM2520)

- Measuring current :
  - ・1mA rms(0.047 to 4.7μH)
  - ・0.1mA rms(5.6 to 33μH)

**HK、HKQ、AQ Series :**

- Measuring frequency : 100MHz (HK0603・HK1005・AQ105)
- Measuring frequency : 50/100MHz (HK1608・HK2125)
- Measuring frequency : 500MHz (HKQ0603S)
- Measuring equipment, jig :
  - ・HP4291A+16197A(or its equivalent)/HK0603・AQ105
  - ・HP4291A+16193A(or its equivalent)/HK1005
  - ・E4991A+16197A(or its equivalent)/HKQ0603S
  - ・HP4291A+16092+in-house made jig(or its equivalent)/HK1608・HK2125

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.



**RELIABILITY DATA**

Multilayer chip inductors and beads

6. Q	
BK0402	
BK0603	
BK1005	
BK1608	
BK2125	
ARRAY	BK2010 —
	BK3216
BKP0603	
BKP1005	
BKP1608	
BKP2125	
CK1608	20 min.
CK2125	15~20 min.
CKS2125	
CKP2012	
CKP2016	
CKP2520	—
NM2012	
NM2520	
LK1005	10~20 min.
LK1608	10~35 min.
LK2125	15~50 min.
HK0603	4~5 min.
HK1005	8 min.
HK1608	8~12 min.
HK2125	10~18 min.
HKQ0603S	10~13 min.
AQ105	8 min.
【Test Methods and Remarks】	
CK Series :	
Measuring frequency : 2 to 4MHz(CK1608)	
Measuring frequency : 2 to 25MHz(CK2125)	
LK Series :	
Measuring frequency : 10 to 25MHz(LK1005)	
Measuring frequency : 1 to 50MHz(LK1608)	
Measuring frequency : 0.4 to 50MHz(LK2125)	
Measuring equipment, jig : ·HP4194A+16085B+16092A(or its equivalent)	
·HP4195A+41951+16092A(or its equivalent)	
·HP4294A+16192A(or its equivalent)	
·HP4291A+16193A(or its equivalent)/LK1005	
Measuring current : ·1mA rms(0.047 to 4.7μH) ·0.1mA rms(5.6 to 33μH)	
HK, HKQ, AQ Series :	
Measuring frequency : 100MHz(HK0603·HK1005·AQ105)	
Measuring frequency : 50/100MHz(HK1608·HK2125)	
Measuring frequency : 500MHz(HKQ0603S)	
Measuring equipment, jig : ·HP4291A+16197A(or its equivalent)/HK0603·AQ105	
·HP4291A+16193A(or its equivalent)/HK1005	
·E4991A+16197A(or its equivalent)/HKQ0603S	
·HP4291A+16092A+ in-house made jig(or its equivalent)/HK1608·HK2125	

7. DC Resistance	
BK0402	0.10~0.53Ω max.
BK0603	0.065~1.50Ω max.
BK1005	0.03~0.80Ω max.
BK1608	0.05~1.10Ω max.
BK2125	0.05~0.75Ω max.
ARRAY	BK2010 0.10~0.90Ω max.
	BK3216 0.15~0.80Ω max.
BKP0603	0.065~0.070Ω max.
BKP1005	0.030~0.20Ω max.
BKP1608	0.025~0.18Ω max.
BKP2125	0.020~0.075Ω max.
CK1608	0.45~0.85Ω (±30%)
CK2125	0.16~0.65Ω max.
CKS2125	0.09~0.40Ω typ.
	0.12~0.52Ω max.
CKP2012	0.10~0.28Ω max.
CKP2016	0.08~0.20Ω max.
CKP2520	0.05~0.16Ω max.
NM2012	0.10~0.19Ω max.
NM2520	0.13~0.22Ω max.
LK1005	0.41~1.16Ω max.
LK1608	0.2~2.2Ω max.
LK2125	0.1~1.1Ω max.
HK0603	0.11~3.74Ω max.
HK1005	0.08~4.8Ω max.
HK1608	0.05~2.6Ω max.
HK2125	0.10~1.5Ω max.
HKQ0603S	0.06~1.29Ω max.
AQ105	0.07~0.45Ω max.

【Test Methods and Remarks】  
 Measuring equipment : VOAC-7412(made by Iwasaki Tsushinki) VOAC-7512(made by Iwasaki Tsushinki)

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.  
 For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

## RELIABILITY DATA

### Multilayer chip inductors and beads

8. Self Resonance Frequency (SRF)	
BK0402	
BK0603	
BK1005	
BK1608	
BK2125	
ARRAY	BK2010
	BK3216
BKP0603	
BKP1005	
BKP1608	
BKP2125	
CK1608	17~25MHz min.
CK2125	24~235MHz min.
CKS2125	
CKP2012	
CKP2016	
CKP2520	
NM2012	
NM2520	
LK1005	40~180MHz min.
LK1608	9~260MHz min.
LK2125	13~320MHz min.
HK0603	900~10000MHz min.
HK1005	400~10000MHz min.
HK1608	300~10000MHz min.
HK2125	200~4000MHz min.
HKQ0603S	1900~10000MHz min.
AQ105	2300~10000MHz min.
【Test Methods and Remarks】	
LK Series :	
Measuring equipment : HP4195A(or its equivalent)	
Measuring jig : 41951+16092A(or its equivalent)	
HK、HKQ、AQ Series :	
Measuring equipment : HP8719C(or its equivalent) +HP8753D(or its equivalent)/HK2125	

9. Temperature Characteristic	
BK0402	
BK0603	
BK1005	
BK1608	
BK2125	
ARRAY	BK2010
	BK3216
BKP0603	
BKP1005	
BKP1608	
BKP2125	
CK1608	
CK2125	
CKS2125	
CKP2012	
CKP2016	
CKP2520	
NM2012	
NM2520	
LK1005	
LK1608	
LK2125	
HK0603	
HK1005	
HK1608	
HK2125	Inductance change : Within $\pm 10\%$
HKQ0603S	
AQ105	
【Test Methods and Remarks】	
HK、HKQ、AQ Series : Temperature range : -30 to +85°C	
Reference temperature : +20°C	

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.  
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.


**RELIABILITY DATA**

Multilayer chip inductors and beads

10. Resistance to Flexure of Substrate	
BK0402	
BK0603	
BK1005	
BK1608	
BK2125	
ARRAY	BK2010
	BK3216
BKP0603	
BKP1005	
BKP1608	
BKP2125	
CK1608	
CK2125	
CKS2125	No mechanical damage.
CKP2012	
CKP2016	
CKP2520	
NM2012	
NM2520	
LK1005	
LK1608	
LK2125	
HK0603	
HK1005	
HK1608	
HK2125	
HKQ0603S	
AQ105	

**[Test Methods and Remarks]**

Warp : 2mm (BK Series without 0402size, BKP, CK, CKS, CKP, NM, LK, HK, HKQ, AQ Series)  
 : 1mm (BK0402 Series)  
 Testing board : glass epoxy-resin substrate  
 Thickness : 0.8mm



11. Solderability	
BK0402	
BK0603	
BK1005	
BK1608	
BK2125	
ARRAY	BK2010
	BK3216
BKP0603	At least 75% of terminal electrode is covered by new solder.
BKP1005	
BKP1608	
BKP2125	
CK1608	
CK2125	
CKS2125	
CKP2012	
CKP2016	
CKP2520	
NM2012	
NM2520	
LK1005	At least 75% of terminal electrode is covered by new solder.
LK1608	
LK2125	
HK0603	
HK1005	
HK1608	
HK2125	
HKQ0603S	
AQ105	

**[Test Methods and Remarks]**

Solder temperature : 230±5°C  
 Duration : 4±1 sec.

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

## RELIABILITY DATA

### Multilayer chip inductors and beads

12. Resistance to Soldering	
BK0402	
BK0603	
BK1005	
BK1608	
BK2125	
ARRAY	BK2010 BK3216
BKP0603	
BKP1005	
BKP1608	
BKP2125	
CK1608	
CK2125	No mechanical damage.
CKS2125	Remaining terminal electrode : 70% min.
CKP2012	Inductance change
CKP2016	R10~4R7 : Within $\pm 10\%$
CKP2520	6R8~100 : Within $\pm 15\%$
NM2012	CKS2125 : Within $\pm 20\%$
NM2520	CKP2012, CKP2016, CKP2520, NM2012, NM2520 : Within $\pm 30\%$
LK1005	No mechanical damage. Remaining terminal electrode : 70% min. Inductance change : Within $\pm 15\%$
LK1608	No mechanical damage.
LK2125	Remaining terminal electrode : 70% min. Inductance change 47N~4R7 : Within $\pm 10\%$ 5R6~330 : Within $\pm 15\%$
HK0603	
HK1005	
HK1608	No mechanical damage.
HK2125	Remaining terminal electrode : 70% min. Inductance change : Within $\pm 5\%$
HKQ0603S	
AQ105	
【Test Methods and Remarks】	
Solder temperature : $260 \pm 5^\circ\text{C}$	
Duration : $10 \pm 0.5$ sec.	
Preheating temperature : 150 to $180^\circ\text{C}$	
Preheating time : 3 min.	
Flux : Immersion into methanol solution with colophony for 3 to 5 sec.	
Recovery : 2 to 3 hrs of recovery under the standard condition after the test. (See Note 1)	

13. Thermal Shock	
BK0402	
BK0603	
BK1005	
BK1608	
BK2125	
ARRAY	BK2010 BK3216
BKP0603	
BKP1005	
BKP1608	
BKP2125	
CK1608	No mechanical damage.
CK2125	Inductance change : Within $\pm 20\%$ Q change : Within $\pm 30\%$
CKS2125	Inductance change : Within $\pm 20\%$ (CKS2125)
CKP2012	
CKP2016	
CKP2520	No mechanical damage. Inductance change : Within $\pm 30\%$
NM2012	
NM2520	
LK1005	
LK1608	No mechanical damage.
LK2125	Inductance change : Within $\pm 10\%$ Q change : Within $\pm 30\%$
HK0603	
HK1005	
HK1608	No mechanical damage.
HK2125	Inductance change : Within $\pm 10\%$ Q change : Within $\pm 20\%$
HKQ0603S	
AQ105	
【Test Methods and Remarks】	
Conditions for 1 cycle	
Step 1 : Minimum operating temperature $+3_0^\circ\text{C}$ 30 $\pm$ 3 min.	
Step 2 : Room temperature 2 to 3 min.	
Step 3 : Maximum operating temperature $+3_0^\circ\text{C}$ 30 $\pm$ 3 min.	
Step 4 : Room temperature 2 to 3 min.	
Number of cycles : 5	
Recovery : 2 to 3 hrs of recovery under the standard condition after the test. (See Note 1)	

(Note 1) When there are questions concerning measurement result : measurement shall be made after  $48 \pm 2$  hrs of recovery under the standard condition.

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

**RELIABILITY DATA**

Multilayer chip inductors and beads

14. Damp Heat (Steady state)		
BK0402		
BK0603		
BK1005		
BK1608		
BK2125		
ARRAY	BK2010	Appearance : No significant abnormality. Impedance change : Within $\pm 30\%$
	BK3216	
BKP0603		
BKP1005		
BKP1608		
BKP2125		
CK1608		No mechanical damage.
CK2125		Inductance change : Within $\pm 20\%$ Q change : Within $\pm 30\%$
CKS2125		Inductance change : Within $\pm 20\%$
CKP2012		
CKP2016		
CKP2520		No mechanical damage. Inductance change : Within $\pm 30\%$
NM2012		
NM2520		
LK1005		No mechanical damage.
LK1608		Inductance change : Within $\pm 10\%$ Q change : Within $\pm 30\%$
LK2125		No mechanical damage. Inductance change : Within $\pm 20\%$ Q change : Within $\pm 30\%$
HK0603		
HK1005		
HK1608		No mechanical damage.
HK2125		Inductance change : Within $\pm 10\%$ Q change : Within $\pm 20\%$
HKQ0603S		
AQ105		
<b>[Test Methods and Remarks]</b>		
BK Series :		
Temperature : $40 \pm 2^\circ\text{C}$		
Humidity : 90 to 95%RH		
Duration : $500 \pm_{-0}^{+24}$ hrs		
Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber.(See Note 1)		
LK, CK, CKS, CKP, NM, HK, HKQ, AQ Series :		
Temperature : $40 \pm 2^\circ\text{C}$ (LK, CK, CKS, CKP, NM Series)		
: $60 \pm 2^\circ\text{C}$ (HK, HKQ, AQ Series)		
Humidity : 90 to 95%RH		
Duration : $500 \pm 12$ hrs		
Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber.(See Note 1)		

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.  
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

## RELIABILITY DATA

### Multilayer chip inductors and beads

15. Loading under Damp Heat	
BK0402	
BK0603	
BK1005	
BK1608	
BK2125	
ARRAY	Appearance : No significant abnormality. Impedance change : Within $\pm 30\%$
BKP0603	
BKP1005	
BKP1608	
BKP2125	
CK1608	No mechanical damage.
CK2125	Inductance change : Within $\pm 20\%$ Q change : Within $\pm 30\%$
CKS2125	No mechanical damage. Inductance change : Within $\pm 20\%$
CKP2012	
CKP2016	
CKP2520	No mechanical damage. Inductance change : Within $\pm 30\%$
NM2012	
NM2520	
LK1005	No mechanical damage. Inductance change : Within $\pm 10\%$ Q change : Within $\pm 30\%$
LK1608	No mechanical damage. Inductance change : 0.047 to 12.0 $\mu\text{H}$ : Within $\pm 10\%$ 15.0 to 33.0 $\mu\text{H}$ : Within $\pm 15\%$ Q change : Within $\pm 30\%$
LK2125	No mechanical damage. Inductance change : Within $\pm 20\%$ Q change : Within $\pm 30\%$
HK0603	
HK1005	
HK1608	No mechanical damage.
HK2125	Inductance change : Within $\pm 10\%$ Q change : Within $\pm 20\%$
HKQ0603S	
AQ105	

#### [Test Methods and Remarks]

##### BK Series :

Temperature :  $40 \pm 2^\circ\text{C}$

Humidity : 90 to 95%RH

Applied current : Rated current

Duration :  $500 \pm 24$  hrs

Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber. (See Note 1)

##### LK, CK, CKS, CKP, NM, HK, HKQ, AQ Series :

Temperature :  $40 \pm 2^\circ\text{C}$  (LK, CK, CKS, CKP, NM Series)

:  $60 \pm 2^\circ\text{C}$  (HK, HKQ, AQ Series)

Humidity : 90 to 95%RH

Applied current : Rated current

Duration :  $500 \pm 12$  hrs

Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber. (See Note 1)

Note on standard condition: "standard condition" referred to herein is defined as follows:

5 to 35°C of temperature, 45 to 85% relative humidity, and 86 to 106kPa of air pressure.

When there are questions concerning measurement results:

In order to provide correlation data, the test shall be conducted under condition of  $20 \pm 2^\circ\text{C}$  of temperature, 60 to 70% relative humidity, and 86 to 106kPa of air pressure.

Unless otherwise specified, all the tests are conducted under the "standard condition."

(Note 1) Measurement shall be made after  $48 \pm 2$  hrs of recovery under the standard condition.

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.  
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

**RELIABILITY DATA**

Multilayer chip inductors and beads

16. Loading at High Temperature	
BK0402	
BK0603	
BK1005	
BK1608	
BK2125	
ARRAY	Appearance : No significant abnormality Impedance change : Within $\pm 30\%$
BK2010	
BK3216	
BKP0603	
BKP1005	
BKP1608	
BKP2125	
CK1608	No mechanical damage.
CK2125	Inductance change : Within $\pm 20\%$ Q change : Within $\pm 30\%$
CKS2125	No mechanical damage. Inductance change : Within $\pm 20\%$
CKP2012	
CKP2016	
CKP2520	No mechanical damage. Inductance change : Within $\pm 30\%$
NM2012	
NM2520	
LK1005	No mechanical damage. Inductance change : Within $\pm 10\%$ Q change : Within $\pm 30\%$
LK1608	No mechanical damage. Inductance change : 0.047 to 12.0 $\mu\text{H}$ : Within $\pm 10\%$ 15.0 to 33.0 $\mu\text{H}$ : Within $\pm 15\%$ Q change : Within $\pm 30\%$
LK2125	No mechanical damage. Inductance change : Within $\pm 20\%$ Q change : Within $\pm 30\%$
HK0603	
HK1005	
HK1608	No mechanical damage.
HK2125	Inductance change : Within $\pm 10\%$ Q change : Within $\pm 20\%$
HKQ0603S	
AQ105	

**[Test Methods and Remarks]**

**BK Series :**

Temperature :  $125 \pm 3^\circ\text{C}$

Applied current : Rated current

Duration :  $500 \pm_{-9}^{+24}$  hrs

Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber. (See Note 1)

**LK, CK, CKS, CKP, NM, HK, HKQ, AQ, BKP Series :**

Temperature :  $85 \pm 2^\circ\text{C}$  (LK, CK, CKS, CKP, NM, BKP Series)

:  $85 \pm 2^\circ\text{C}$  (HK1608, 2125)

:  $85 \pm 2^\circ\text{C}$  (HK1005, AQ105 operating temperature range  $-55$  to  $+85^\circ\text{C}$ )

:  $125 \pm 2^\circ\text{C}$  (HK0603, HK1005, HKQ0603S, AQ105 operating temperature range  $-55$  to  $+125^\circ\text{C}$ )

Applied current : Rated current

Duration :  $500 \pm 12$  hrs

Recovery : 2 to 3 hrs of recovery under the standard condition after the test. (See Note 1)

Note on standard condition: "standard condition" referred to herein is defined as follows:

5 to  $35^\circ\text{C}$  of temperature, 45 to 85% relative humidity, and 86 to 106kPa of air pressure.

When there are questions concerning measurement results:

In order to provide correlation data, the test shall be conducted under condition of  $20 \pm 2^\circ\text{C}$  of temperature, 60 to 70% relative humidity, and 86 to 106kPa of air pressure. Unless otherwise specified, all the tests are conducted under the "standard condition."

(Note 1) Measurement shall be made after  $48 \pm 2$  hrs of recovery under the standard condition.

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

## PRECAUTIONS

Precautions on the use of Multilayer chip Inductors, Multilayer chip inductors for high frequency, Multilayer ferrite chip beads

### 1. Circuit Design

Precautions	<p>◆Verification of operating environment, electrical rating and performance</p> <p>1. A malfunction in medical equipment, spacecraft, nuclear reactors, etc. may cause serious harm to human life or have severe social ramifications. As such, any inductors to be used in such equipment may require higher safety and/or reliability considerations and should be clearly differentiated from components used in general purpose applications.</p>
	<p>◆Operating Current (Verification of Rated current)</p> <p>1. The operating current for inductors must always be lower than their rated values.</p> <p>2. Do not apply current in excess of the rated value because the inductance may be reduced due to the magnetic saturation effect.</p>


### 2. PCB Design

Precautions	<p>◆Pattern configurations(Design of Land-patterns)</p> <p>1. When inductors are mounted on a PCB, the size of land patterns and the amount of solder used(size of fillet) can directly affect inductor performance. Therefore, the following items must be carefully considered in the design of solder land patterns:</p> <p>(1) The amount of solder applied can affect the ability of chips to withstand mechanical stresses which may lead to breaking or cracking. Therefore, when designing land-patterns it is necessary to consider the appropriate size and configuration of the solder pads which in turn determines the amount of solder necessary to form the fillets.</p> <p>(2) When more than one part is jointly soldered onto the same land or pad, the pad must be designed so that each component's soldering point is separated by solder-resist.</p> <p>(3) The larger size of land patterns and amount of solder, the smaller Q value after mounting on PCB. It makes higher the Q value to design land patterns smaller than terminal electrode of chips.</p>
	<p>◆Pattern configurations(Inductor layout on panelized [breakaway] PC boards)</p> <p>1. After inductors have been mounted on the boards, chips can be subjected to mechanical stresses in subsequent manufacturing processes (PCB cutting, board inspection, mounting of additional parts, assembly into the chassis, wave soldering the reflow soldered boards etc.) For this reason, planning pattern configurations and the position of SMD inductors should be carefully performed to minimize stress.</p>

◆Pattern configurations(Design of Land-patterns)

1. The following diagrams and tables show some examples of recommended patterns to prevent excessive solder amounts (larger fillets which extend above the component end terminations). Examples of improper pattern designs are also shown.

(1) Recommended land dimensions for a typical chip inductor land patterns for PCBs



Recommended land dimensions for wave-soldering

Type	1608	2125	3216	
Solder-resist	L	1.6	2.0	3.2
	W	0.8	1.25	1.6
A	0.8~1.0	1.0~1.4	1.8~2.5	
B	0.5~0.8	0.8~1.5	0.8~1.7	
C	0.6~0.8	0.9~1.2	1.2~1.6	


(Unit : mm)

Recommended land dimensions for reflow-soldering

Type	0402	0603	1005	105	1608	2012	2125	2016	3216	2520
Solder-resist	L	0.4	0.6	1.0	1.0	1.6	2.0	2.0	3.2	2.5
	W	0.2	0.3	0.5	0.6	0.8	1.25	1.25	1.6	2.0
A	0.15~0.25	0.20~0.30	0.45~0.55	0.50~0.55	0.8~1.0	0.8~1.2	0.8~1.2	0.8~1.2	1.8~2.5	1.0~1.4
B	0.10~0.20	0.20~0.30	0.40~0.50	0.30~0.40	0.6~0.8	0.8~1.2	0.8~1.2	0.8~1.2	0.6~1.5	0.6~1.0
C	0.15~0.30	0.25~0.40	0.45~0.55	0.60~0.70	0.6~0.8	0.9~1.6	0.9~1.6	1.2~2.0	1.8~2.2	

(Unit : mm)

Excess solder can affect the ability of chips to withstand mechanical stresses. Therefore, please take proper precautions when designing land-patterns.



Recommended land dimension for Reflow-soldering

Type	3216	2010	
Solder-resist	L	3.2	2.0
	W	1.6	1.0
a	0.7~0.9	0.5~0.6	
b	0.8~1.0	0.5~0.6	
c	0.4~0.5	0.2~0.3	
d	0.8	0.5	

(Unit : mm)

Technical considerations

(2) Examples of good and bad solder application

Item	Not recommended	Recommended
Mixed mounting of SMD and leaded components		
Component placement close to the chassis		
Hand-soldering of leaded components near mounted components		
Horizontal component placement		

To next page

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.



## PRECAUTIONS

### Precautions on the use of Multilayer chip Inductors, Multilayer chip inductors for high frequency, Multilayer ferrite chip beads

#### 2. PCB Design


##### ◆Pattern configurations (Inductor layout on panelized [breakaway] PC boards)

- 1-1. The following are examples of good and bad inductor layout; SMD inductors should be located to minimize any possible mechanical stresses from board warp or deflection.

Item	Not recommended	Recommended
Deflection of the board		Position the component at a right angle to the direction of the mechanical stresses that are anticipated.

Technical considerations

- 1-2. To layout the inductors for the breakaway PC board, it should be noted that the amount of mechanical stresses given will vary depending on inductor layout. An example below should be counted for better design.



- 1-3. When breaking PC boards along their perforations, the amount of mechanical stress on the inductors can vary according to the method used. The following methods are listed in order from least stressful to most stressful: push-back, slit, V-grooving, and perforation. Thus, any ideal SMD inductor layout must also consider the PCB splitting procedure.

#### 3. Considerations for automatic placement

##### ◆Adjustment of mounting machine

- Excessive impact load should not be imposed on the inductors when mounting onto the PC boards.
- The maintenance and inspection of the mounter should be conducted periodically.

Precautions

##### ◆Selection of Adhesives

- Mounting inductors with adhesives in preliminary assembly, before the soldering stage, may lead to degraded inductor characteristics unless the following factors are appropriately checked; the size of land patterns, type of adhesive, amount applied, hardening temperature and hardening period. Therefore, it is imperative to consult the manufacturer of the adhesives on proper usage and amounts of adhesive to use.

##### ◆Adjustment of mounting machine

- If the lower limit of the pick-up nozzle is low, too much force may be imposed on the inductors, causing damage. To avoid this, the following points should be considered before lowering the pick-up nozzle:
  - The lower limit of the pick-up nozzle should be adjusted to the surface level of the PC board after correcting for deflection of the board.
  - The pick-up pressure should be adjusted between 1 and 3N static loads.
  - To reduce the amount of deflection of the board caused by impact of the pick-up nozzle, supporting pins or back-up pins should be used under the PC board. The following diagrams show some typical examples of good pick-up nozzle placement:

Item	Improper method	Proper method
Single-sided mounting		
Double-sided mounting		

- As the alignment pin wears out, adjustment of the nozzle height can cause chipping or cracking of the inductors because of mechanical impact on the inductors. To avoid this, the monitoring of the width between the alignment pin in the stopped position, and maintenance, inspection and replacement of the pin should be conducted periodically.

Technical considerations

##### ◆Selection of Adhesives

- Some adhesives may cause reduced insulation resistance. The difference between the shrinkage percentage of the adhesive and that of the inductors may result in stresses on the inductors and lead to cracking. Moreover, too little or too much adhesive applied to the board may adversely affect component placement, so the following precautions should be noted in the application of adhesives.

##### (1) Required adhesive characteristics

- The adhesive should be strong enough to hold parts on the board during the mounting & solder process.
- The adhesive should have sufficient strength at high temperatures.
- The adhesive should have good coating and thickness consistency.
- The adhesive should be used during its prescribed shelf life.
- The adhesive should harden rapidly.
- The adhesive must not be contaminated.
- The adhesive should have excellent insulation characteristics.
- The adhesive should not be toxic and have no emission of toxic gasses.

- When using adhesives to mount inductors on a PCB, inappropriate amounts of adhesive on the board may adversely affect component placement. Too little adhesive may cause the inductors to fall off the board during the solder process. Too much adhesive may cause defective soldering due excessive flow of adhesive on to the land or solder pad.

##### [Recommended conditions]

Figure	0805 case sizes as examples
a	0.3mm min
b	100~120 μm
c	Area with no adhesive

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

# PRECAUTIONS

## Precautions on the use of Multilayer chip Inductors, Multilayer chip inductors for high frequency, Multilayer ferrite chip beads

### 4. Soldering

**◆ Selection of Flux**  
 1. Since flux may have a significant effect on the performance of inductors, it is necessary to verify the following conditions prior to use;  
 (1) Flux used should be with less than or equal to 0.1 wt% (Chlorine conversion method) of halogenated content. Flux having a strong acidity content should not be applied.  
 (2) When soldering inductors on the board, the amount of flux applied should be controlled at the optimum level.  
 (3) When using water-soluble flux, special care should be taken to properly clean the boards.



**◆ Soldering**  
 1. Temperature, time, amount of solder, etc. are specified in accordance with the following recommended conditions, and please contact us about peak temperature when you use lead-free paste.

**◆ Selection of Flux**  
 1-1. When too much halogenated substance (Chlorine, etc.) content is used to activate the flux, or highly acidic flux is used, an excessive amount of residue after soldering may lead to corrosion of the terminal electrodes or degradation of insulation resistance on the surface of the Inductor.  
 1-2. Flux is used to increase solderability in flow soldering, but if too much is applied, a large amount of flux gas may be emitted and may detrimentally affect solderability. To minimize the amount of flux applied, it is recommended to use a flux-bubbling system.  
 1-3. Since the residue of water-soluble flux is easily dissolved by water content in the air, the residue on the surface of Inductor in high humidity conditions may cause a degradation of insulation resistance and therefore affect the reliability of the components. The cleaning methods and the capability of the machines used should also be considered carefully when selecting water-soluble flux.

**◆ Soldering**  
 1-1. Preheating when soldering  
 Heating: Chip inductor components should be preheated to within 100 to 130°C of the soldering. Cooling: The temperature difference between the components and cleaning process should not be greater than 100°C.  
 Chip inductors are susceptible to thermal shock when exposed to rapid or concentrated heating or rapid cooling. Therefore, the soldering process must be conducted with a great care so as to prevent malfunction of the components due to excessive thermal shock.


#### Recommended conditions for soldering

[Reflow soldering]  
 Temperature profile

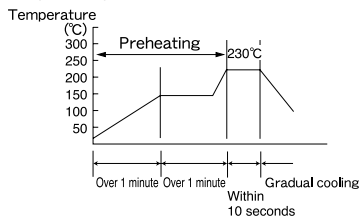



#### Caution

1. The ideal condition is to have solder mass (fillet) controlled to 1/2 to 1/3 of the thickness of the inductor, as shown below:



2. Because excessive dwell times can detrimentally affect solderability, soldering duration should be kept as close to recommended times as possible.



[Wave soldering]  
 Temperature profile

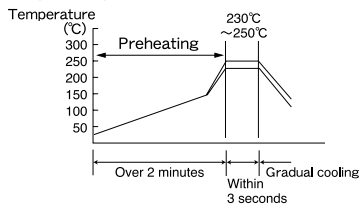

#### Caution

1. Make sure the inductors are preheated sufficiently.
2. The temperature difference between the inductor and melted solder should not be greater than 100 to 130°C.
3. Cooling after soldering should be as gradual as possible.
4. Wave soldering must not be applied to the inductors designated as for reflow soldering only.

[Hand soldering]  
 Temperature profile

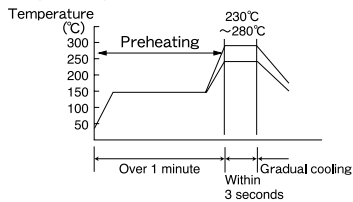

#### Caution

1. Use a 20W soldering iron with a maximum tip diameter of 1.0 mm.
2. The soldering iron should not directly touch the inductor.

Technical considerations

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

## PRECAUTIONS

### Precautions on the use of Multilayer chip Inductors, Multilayer chip inductors for high frequency, Multilayer ferrite chip beads

5. Cleaning							
Precautions	<ul style="list-style-type: none"> <li>◆Cleaning conditions</li> <li>1. When cleaning the PC board after the Inductors are all mounted, select the appropriate cleaning solution according to the type of flux used and purpose of the cleaning (e.g. to remove soldering flux or other materials from the production process.)</li> <li>2. Cleaning conditions should be determined after verifying, through a test run, that the cleaning process does not affect the inductor's characteristics.</li> </ul>						
Technical considerations	<ul style="list-style-type: none"> <li>◆Cleaning conditions</li> <li>1. The use of inappropriate solutions can cause foreign substances such as flux residue to adhere to the inductor, resulting in a degradation of the inductor's electrical properties (especially insulation resistance).</li> <li>2. Inappropriate cleaning conditions (insufficient or excessive cleaning) may detrimentally affect the performance of the inductors.               <ul style="list-style-type: none"> <li>(1) Excessive cleaning                   <ul style="list-style-type: none"> <li>a. In the case of ultrasonic cleaning, too much power output can cause excessive vibration of the PC board which may lead to the cracking of the inductor or the soldered portion, or decrease the terminal electrodes' strength. Thus the following conditions should be carefully checked;                       <table border="0" style="margin-left: 20px;"> <tr> <td>Ultrasonic output</td> <td>Below 20W/ℓ</td> </tr> <tr> <td>Ultrasonic frequency</td> <td>Below 40kHz</td> </tr> <tr> <td>Ultrasonic washing period</td> <td>5 min. or less</td> </tr> </table> </li> </ul> </li> </ul> </li> </ul>	Ultrasonic output	Below 20W/ℓ	Ultrasonic frequency	Below 40kHz	Ultrasonic washing period	5 min. or less
Ultrasonic output	Below 20W/ℓ						
Ultrasonic frequency	Below 40kHz						
Ultrasonic washing period	5 min. or less						
6. Post cleaning processes							
Precautions	<ul style="list-style-type: none"> <li>◆Application of resin coatings, moldings, etc. to the PCB and components.               <ul style="list-style-type: none"> <li>1. With some type of resins a decomposition gas or chemical reaction vapor may remain inside the resin during the hardening period or while left under normal storage conditions resulting in the deterioration of the inductor's performance.</li> <li>2. When a resin's hardening temperature is higher than the inductor's operating temperature, the stresses generated by the excess heat may lead to inductor damage or destruction.</li> <li>3. Stress caused by a resin's temperature generated expansion and contraction may damage inductors.</li> </ul> </li> </ul> <p>The use of such resins, molding materials etc. is not recommended.</p>						
7. Handling							
Precautions	<ul style="list-style-type: none"> <li>◆Breakaway PC boards (splitting along perforations)               <ul style="list-style-type: none"> <li>1. When splitting the PC board after mounting inductors and other components, care is required so as not to give any stresses of deflection or twisting to the board.</li> <li>2. Board separation should not be done manually, but by using the appropriate devices.</li> </ul> </li> <li>◆General handling precautions               <ul style="list-style-type: none"> <li>1. Always wear static control bands to protect against ESD.</li> <li>2. Keep the inductors away from all magnets and magnetic objects.</li> <li>3. Use non-magnetic tweezers when handling inductors.</li> <li>4. Any devices used with the inductors (soldering irons, measuring instruments) should be properly grounded.</li> <li>5. Keep bare hands and metal products (i.e., metal desk) away from chip electrodes or conductive areas that lead to chip electrodes.</li> <li>6. Keep inductors away from items that generate magnetic fields such as speakers or coils.</li> </ul> </li> <li>◆Mechanical considerations               <ul style="list-style-type: none"> <li>1. Be careful not to subject the inductors to excessive mechanical shocks.                   <ul style="list-style-type: none"> <li>(1) If inductors are dropped on the floor or a hard surface they should not be used.</li> <li>(2) When handling the mounted boards, be careful that the mounted components do not come in contact with or bump against other boards or components.</li> </ul> </li> </ul> </li> </ul>						
8. Storage conditions							
Precautions	<ul style="list-style-type: none"> <li>◆Storage               <ul style="list-style-type: none"> <li>1. To maintain the solderability of terminal electrodes and to keep the packaging material in good condition, care must be taken to control temperature and humidity in the storage area. Humidity should especially be kept as low as possible.                   <table border="0" style="margin-left: 20px;"> <tr> <td colspan="2">Recommended conditions</td> </tr> <tr> <td>Ambient temperature</td> <td>Below 40°C</td> </tr> <tr> <td>Humidity</td> <td>Below 70% RH</td> </tr> </table> </li> </ul> </li> </ul> <p>The ambient temperature must be kept below 30°C. Even under ideal storage conditions inductor electrode solderability decreases as time passes, so inductors should be used within 6 months from the time of delivery.</p> <p>*The packaging material should be kept where no chlorine or sulfur exists in the air.</p>	Recommended conditions		Ambient temperature	Below 40°C	Humidity	Below 70% RH
Recommended conditions							
Ambient temperature	Below 40°C						
Humidity	Below 70% RH						
Technical considerations	<ul style="list-style-type: none"> <li>◆Storage               <ul style="list-style-type: none"> <li>1. If the parts are stocked in a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/package materials may take place. For this reason, components should be used within 6 months from the time of delivery. If exceeding the above period, please check solderability before using the inductors.</li> </ul> </li> </ul>						

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.