

Positive LDO regulator IC  
正出力低飽和レギュレータIC

TK111xxCS-G,TK11100CS-G,TK121xxCS-G

DESCRIPTION

The TK111xxCS-G, TK11100CS-G and TK121xxCS-G are low dropout linear regulators with on/off control, which can supply 200mA load current. The output voltage, trimmed with high accuracy, is available from 1.5 to 10.0V in 0.1V steps. The on/off control of the TK121xxCS-G is low threshold type of the TK111xxCS-G. And the TK11100CS-G output voltage, adjustable by external resistors, is available from 1.3 to 13.0V.

TK111xxCS-G、TK11100CS-G、TK121xxCS-Gは、出力電流200mAを安定に供給できるon/offコントロール付低飽和レギュレータICです。出力電圧は内部固定で高精度にトリミングされ、1.5V~10.0Vの間で0.1Vステップで設定できます。TK121xxCS-GはTK111xxCS-Gのon/offコントロール低閾値タイプです。またTK11100CS-Gは外部抵抗により出力電圧を1.3V~13.0V間で自由に設定できます。

FEATURES

- High Precision Output Voltage of  $\pm 1.5\%$  or  $\pm 50\text{mV}$
- Adjustable Output Voltage by External Resistors (TK11100CS)
- Superior Phase Compensation to Previous Model
- Very Good Stability: Ceramic capacitor can be used.
- Very Low Dropout Voltage:  $V_{\text{DRO}}=80\text{mV}$  at  $I_{\text{OUT}}=50\text{mA}$
- Active High On/off Control
- Excellent Ripple Rejection Ratio:  $-80\text{dB}$  at  $1\text{kHz}$
- Very Low Noise with Noise Pass Pin
- Short Circuit Protection (Over Current Protection)
- Thermal Shutdown (Over Heat Protection)
- Reverse Bias Protection
- 高精度出力電圧:  $\pm 1.5\%$  or  $\pm 50\text{mV}$
- 外部抵抗により設定可能な出力電圧(TK11100CS)
- 位相補正をより高度化
- 高い安定性: セラミックコンデンサ使用可能
- 少ない入出力間電圧降下:  $V_{\text{DRO}}=80\text{mV}$  at  $I_{\text{OUT}}=50\text{mA}$
- 出力on/offコントロール: High-On
- 優れたリップルリジェクション:  $-80\text{dB}$  at  $1\text{kHz}$
- ノイズパス端子で低ノイズアプリケーション可
- 短絡保護機能(過電流保護)
- サーマルシャットダウン機能(過熱保護)
- 逆バイアス過電流阻止機能

APPLICATIONS

- Battery Powered Systems
- Mobile Communication Systems: Cordless Phone, GSM, PHS, PDC, CDMA, Base Station of Mobile Phones etc.
- Industrial Equipment: Personal Computer, Barcode Reader etc.
- Measurement System etc.
- バッテリー駆動機器
- 移動体通信機器用: コードレスホン、GSM、PHS、PDC、CDMA、携帯電話基地局 etc.
- 産業機器用: パソコン、バーコードリーダー etc.
- 計測器 etc

PACKAGE OUTLINE

ORDERING INFORMATION

Part name	Package	Marking	Pin configuration	Ordering information																																																																															
TK111xxCS	SOT23-5	Rxx	See next page	<table border="1"> <tr> <td>T</td><td>K</td><td>1</td><td>1</td><td>x</td><td>x</td><td>C</td><td>S</td><td>C</td><td>L</td><td>-</td><td>G</td> </tr> <tr> <td>Number</td> <td colspan="2">1, 2</td> <td colspan="2">Voltage code</td> <td colspan="2">Ex. 2.5V/25, 5.0V/50</td> <td colspan="2">Package code</td> <td colspan="2">S: SOT23-5</td> <td>Environment code</td> </tr> <tr> <td colspan="10"></td> <td>G: Lead free</td> </tr> <tr> <td colspan="10"></td> <td>Storage direction</td> </tr> <tr> <td colspan="10"></td> <td>L: Left type</td> </tr> <tr> <td colspan="10"></td> <td>Temperature range</td> </tr> <tr> <td colspan="10"></td> <td>C: <math>T_A=25^\circ\text{C}</math>, I. Full</td> </tr> </table>	T	K	1	1	x	x	C	S	C	L	-	G	Number	1, 2		Voltage code		Ex. 2.5V/25, 5.0V/50		Package code		S: SOT23-5		Environment code											G: Lead free											Storage direction											L: Left type											Temperature range											C: $T_A=25^\circ\text{C}$ , I. Full
T		K			1	1	x	x	C	S	C	L	-	G																																																																					
Number	1, 2		Voltage code		Ex. 2.5V/25, 5.0V/50		Package code		S: SOT23-5		Environment code																																																																								
										G: Lead free																																																																									
										Storage direction																																																																									
										L: Left type																																																																									
										Temperature range																																																																									
										C: $T_A=25^\circ\text{C}$ , I. Full																																																																									
TK121xxCS		xxR																																																																																	
TK11100CS	SOT23-6	R00	See next page	<table border="1"> <tr> <td>T</td><td>K</td><td>1</td><td>1</td><td>1</td><td>0</td><td>0</td><td>C</td><td>S</td><td>C</td><td>B</td><td>-</td><td>G</td> </tr> <tr> <td colspan="10">Package code</td> <td colspan="2">S: SOT23-5</td> <td>Environment code</td> </tr> <tr> <td colspan="10">Temperature range</td> <td colspan="2">C: <math>T_A=25^\circ\text{C}</math></td> <td>G: Lead free</td> </tr> <tr> <td colspan="10"></td> <td colspan="2">Storage direction</td> </tr> <tr> <td colspan="10"></td> <td colspan="2">B: Back type</td> </tr> </table>	T	K	1	1	1	0	0	C	S	C	B	-	G	Package code										S: SOT23-5		Environment code	Temperature range										C: $T_A=25^\circ\text{C}$		G: Lead free											Storage direction												B: Back type																	
T	K	1	1	1	0	0	C	S	C	B	-	G																																																																							
Package code										S: SOT23-5		Environment code																																																																							
Temperature range										C: $T_A=25^\circ\text{C}$		G: Lead free																																																																							
										Storage direction																																																																									
										B: Back type																																																																									

\* "xx" means voltage code. "xx"は電圧コードを示しています。

**ABSOLUTE MAXIMUM RATINGS**

Parameter	項目	Symbol	記号	Rating	定格	Unit	単位	Remarks	備考
Operating Voltage Range	動作電圧範囲	V <sub>OP</sub>		2.1 to 14.0		V		TK111xxCS/11100CS	
				2.1 to 12.0					
Operating Temperature Range	動作温度範囲	T <sub>OP</sub>		-40 to +85		°C			
Power Dissipation	許容消費電力	P <sub>D</sub>		600		mW		Board mount	基板実装時

**ELECTRICAL CHARACTERISTICS**

TK11100CS: V<sub>IN</sub>=4.0V, V<sub>OUT</sub>=3.0V TK111xxCS, TK121xxCS: V<sub>IN</sub>=V<sub>OUT.TYP</sub>+1.0V, V<sub>CONT</sub>=1.8V, T<sub>A</sub>=T<sub>J</sub>=25°C


Parameter	項目	Symbol	記号	Value			Units	Conditions		
				MIN	TYP	MAX				
Dropout Voltage	入出力間電圧降下 *1	V <sub>DROP</sub>		80	140		mV	I <sub>OUT</sub> =50mA		
Maximum Output Current	最大出力電流 *2	I <sub>OUT.MAX</sub>		240	320		mA	V <sub>OUT</sub> =V <sub>OUT.TYP</sub> ×0.9		
					63	100				
Quiescent Current	電源電流	I <sub>Q</sub>			78	125	μA	TK111xxCS	I <sub>OUT</sub> =0mA	
						92		146		TK11100CS(R1=51kΩ)
										TK121xxCS
Standby Current	スタンバイ電流	I <sub>STB</sub>		0.0	0.1		μA	V <sub>CONT</sub> =0V		
Ground Pin Current	無効電流	I <sub>GND</sub>		1.0	1.8		mA	I <sub>OUT</sub> =50mA		
Control Voltage	コントロール電圧	V <sub>CONT</sub>		1.8			V	TK111xxCS	V <sub>OUT</sub> ON state	
						0.35		TK11100CS	V <sub>OUT</sub> OFF state	
				0.9				TK121xxCS	V <sub>OUT</sub> ON state	
						0.2			V <sub>OUT</sub> OFF state	

\*1 For V<sub>OUT</sub> ≤ 2.0V, no regulations 出力電圧2.0V以下の製品は入出力電圧降下項目の規格はありません。


\*2 The maximum output current is limited by power dissipation. 最大電流値は許容消費電力に制限されます。

**BLOCK DIAGRAM**


■ TK111xxCS

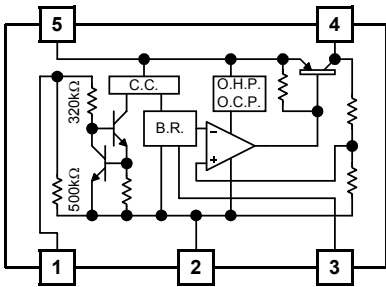


TK111xxCS/TK121xxCS

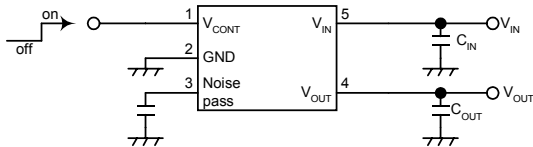

■ TK11100CS

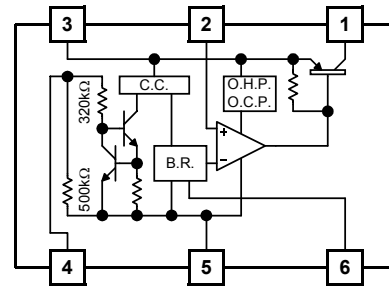


TK11100CS

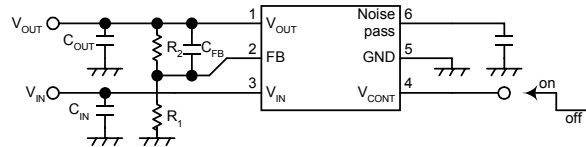

$$V_{OUT} = V_{FB} \times \left\{ \frac{(R_1 + R_2)}{R_1} \right\}$$

$$V_{FB.TYP} = 1.27V$$

■ TK121xxCS

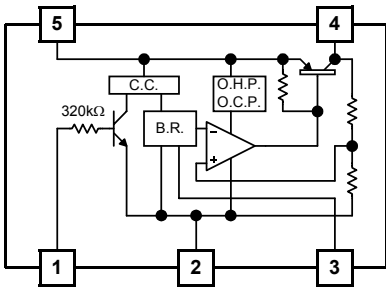

\* C.C....Control Circuit, O.H.P...Over Heat Protection, O.C.P...Over Current Protection, B.G....Band gap Reference