



Features

- Low inductance
- High overload capability
- Wide operating temperature range
- High power
- RoHS compliant*

Applications

- Rectifiers
- Inverter drives
- Switching power supplies

PWR4413 Series Current Sense Resistors

General Information

The Bourns® PWR4413 Series is a through-hole current sense resistor with a high overload capability and a wide operating temperature range.

Performance

Load Life (1000 Hours @ 70 °C) ... $\frac{\Delta R}{R}$ 2.5 %
 Moisture No Load 100 Hours 1 %
 Temperature Cycling (-40 °C to +125 °C, 1000 Cycles)... 1 %

Electrical Specifications

Power Rating @ 85 °C 1 W, 3 W, 5 W
 Resistance Range 0.01 to 0.1 ohms
 (See Standard Resistance Table)
 Temperature Range -55 ° to +325 °C
 Maximum Working Voltage..... $\sqrt{P \cdot R}$
 Short Time Overload 5 x Rated Power for 5 seconds
 Temperature Coefficient ± 900 ppm/°C to ± 60 ppm/°C**
 Packaging..... 250 pcs./bag


**Dependent on resistor value.

Standard Resistance Table

Resistance Code	Resistance Values		
	1 W	3 W	5 W
R010	0.01	0.01	0.01
R015	N/A	0.015	N/A
R020	0.02	0.02	0.02
R025	0.025	0.025	0.025
R030	0.03	0.03	0.03
R040	N/A	0.04	0.04
R050	0.05	0.05	0.05
R100		0.1	

Other resistance values available upon request.


Power Derating Curve

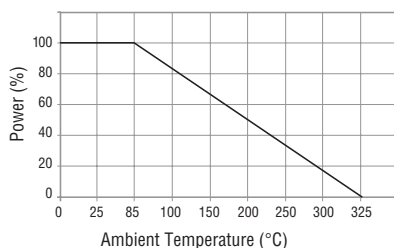

08/09

*RoHS Directive 2002/95/EC Jan 27 2003 including Annex. Specifications are subject to change without notice. Customers should verify actual device performance in their specific applications

Product Dimensions

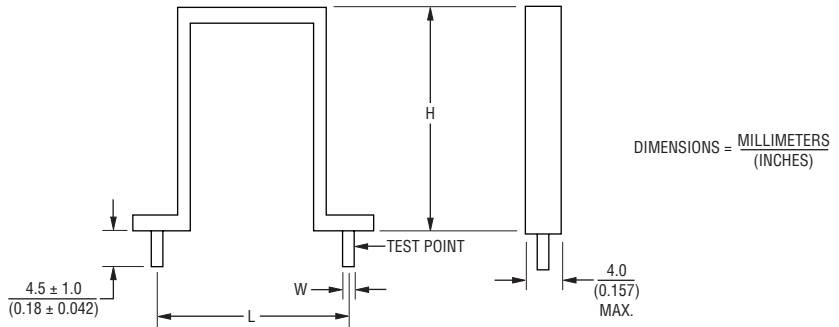

NOTES: Resistance measurement must be made using a 4-wire system and insulated clips attached at the Test Point. Terminal Pins are Tin-Plated Copper.

Power Rating (W)	Version	Dimension L	Dim. H (Max.)	Dimension W	Resistance Values (Ω)
1	B	$11.43 +1.02/-0.51$ (0.450 +0.04/-0.02)	13.5 (0.59)	0.8 ± 0.05 (0.03 ± 0.002)	0.01 - 0.05
3	C	$15.24 +1.02/-0.51$ (0.60 +0.04/-0.02)	16.0 (0.63)	1.0 ± 0.05 (0.04 ± 0.002)	0.01 - 0.1
5	D	$20.32 +1.02/-0.51$ (0.80 +0.04/-0.02)	26.0 (1.02)	1.0 ± 0.05 (0.04 ± 0.002)	0.01 - 0.05

How to Order

Model _____ **PWR4413 D R050 J**

Version _____
 B = 1 W
 C = 3 W
 D = 5 W

Resistance Code _____
 4 Digits - See Standard Resistance Table

Resistance Tolerance _____
 J = 5 %
 F = 1 %



Asia-Pacific:
 Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

Europe:
 Tel: +41-41 768 5555 • Fax: +41-41 768 5510

The Americas:
 Tel: +1-951 781-5500 • Fax: +1-951 781-5700

www.bourns.com