
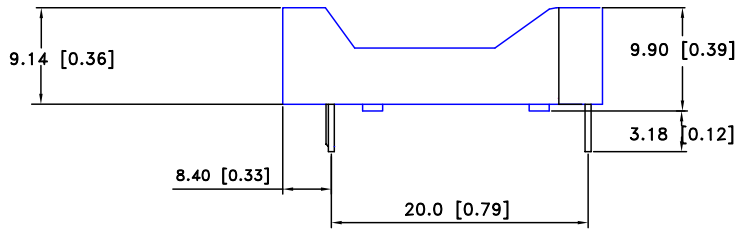


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
8/09/03	A	CHANGED MTL. SPEC. AND ADDED MORE DIM.	T.B.	B.S.	
8/04/07	B	REDRAWN ADDED "ROHS COMPLIANT"	T.B.	B.S.	

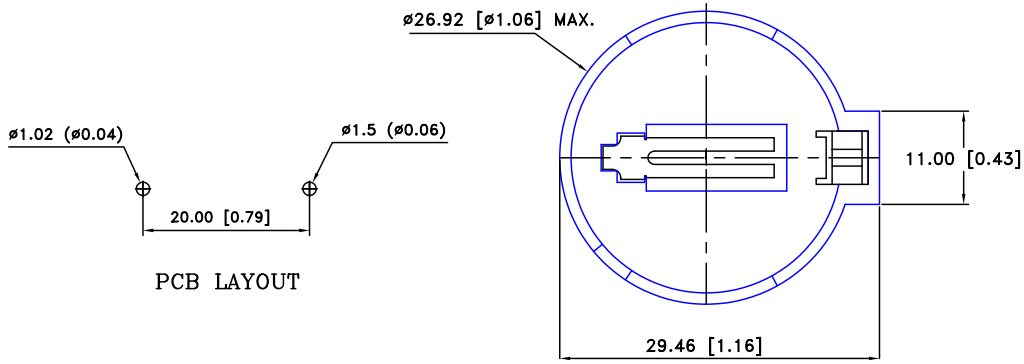

NOTES:

MATERIAL:

BODY: FR-NYLON WITH 15% GLASS FILLED,
UL94V-0, UL FILE NO. E176060(S)

CONTACT: PHOSPHOR BRONZE, NICKEL PLATED
OVERALL WITH SOLDER DIPPED TAILS

APPLICATION FOR 3V LITHIUM BATTERY:


INSULATOR RESISTANCE: 5000MΩ MIN.

OPERATION TEMPERATURE: -55°C TO +105°C

DURABILITY: 50 CYCLES MIN.

CONTACT RESISTANCE: 30MΩ MAX.

ROHS COMPLIANT

Tolerance (Except as noted)	 Memory protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ± .5 (.020)		Scale 4=1	Drawn By T.S. Approved By T.B.
Fractional ± .8 (.030)	Title BATTERY HOLDER FOR CR2450		
Angular ± 3°	Date 8/04/07	Drawing Number BS-2450	