
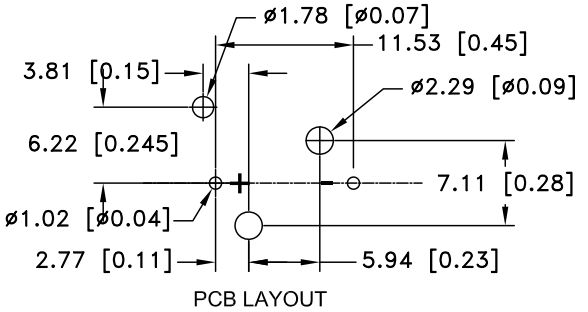




Date	SYM	REVISION RECORD	AUTH	DR.	CK.
02/29/08	A	REDRAWN ADDED "ROHS COMPLIANT"	T.B.		B.S.
09/10/10	B	ADDED DIM. 6.22 FOR PIN LOCATION	T.B.		B.S.

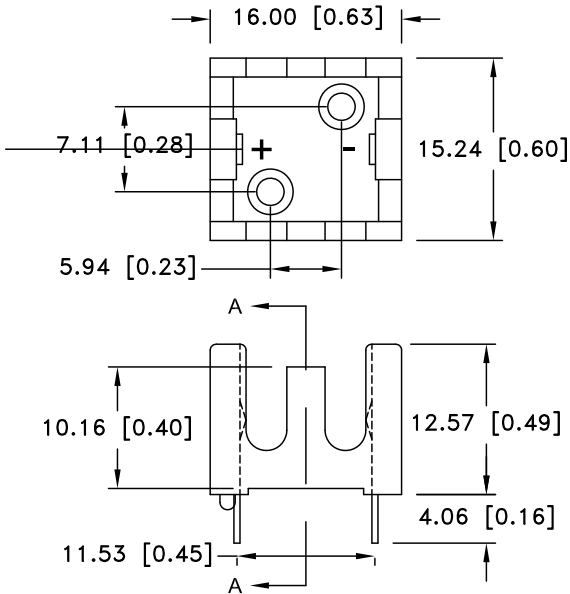

SPECIFICATIONS:
 HOLDER MATERIAL: SELF EXTINGUISHING THERMOPLASTIC,
 BLACK PBT
 FLAMABILITY RATING:UL94V-0, FILE #E41797
 CONTACTS: 301 SPRING TEMPER STAINLESS STEEL, NICKLE
 PLATED OVERALL
 DIELECTRIC STRENGTH: 560 VOLTS/MIL AT 25°C FOR 5 SEC.
 TEMPERATURE RANGE: -55°C TO +140°C
 RESISTANCE TO SOLVENTS: XYLENE, ETHYL , BUTYL, MRTHYL,
 PROPYL ALCOHOL, ETHYL ACETATE,
 HEPTANE, TOLUENE, REFRIGERANT

NOTES:
 EYELET STIMPSON STYLE#A1883 0.110" OD x 0.190" FLANGE
 FLANGE RECESS $\phi 0.203$ " x 0.090" DEEP
 ACCEPTS STANDARD 2-56 MACHINE SCREWS
 ACCESSORIES: BI-UM-3-4, INSULATOR
 ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5 (.020)$		Scale	Drawn By B.S. Approved By T.B.
Fractional $\pm .8 (.030)$	Title BH1/3N-C LITHIUM BATTERY HOLDER		
Angular $\pm 3^\circ$	Date 09/10/10	Drawing Number BH1/3N-C	