
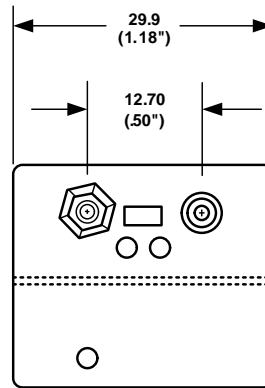


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
10/02/04	A	DIM. 14.80 WAS 12.70	T.B.	B.S.	
11/12/05	B	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
3/18/06	C	UPDATED MATERIAL SPEC.	T.B.	B.S.	
4/29/06	D	ADDED CONTACT RESI. INFO.	T.B.	B.S.	
8/18/07	E	DIM. 12.70 WAS 14.80	T.B.	B.S.	

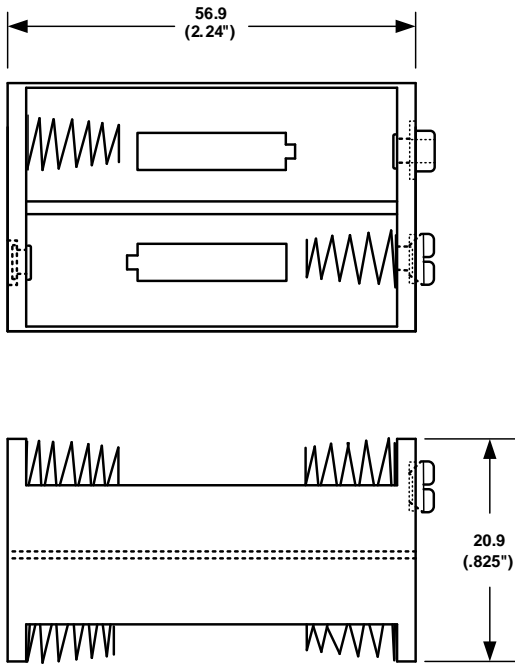


**SPECIFICATIONS :**

Plastic material - Polypropylene, Black  
 Flammability rating-UL94 HB, UL file no. E216959  
 Temperature Range: -10°C to +100°C  
 Springs - nickel plated spring steel  
 Rivets - Brass, nickel plated  
 9 Volts Snaps - Brass, nickel plated  
 Contact resistance: Under 50m Ω for +/- contacts per EIA-540J000  
 ROHS COMPLIANT

**ORDERING CODE BH44AA**

<b>SOLDER LUGS</b>	= L
<b>(6") WIRE LEADS</b>	= W
<b>9 VOLT TYPE SNAPS</b>	= SF

**Note: Dimensions in mm. ( inches )**

TOLERANCES (EXCEPT AS NOTED)		 <b>Memory Protection Devices, Inc.</b> 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL		SCALE	DRAWN BY
+ .5 (.020")		NONE	B.S.
			APPROVED BY
FRACTIONAL	TITLE	<b>FOUR "AA" CELL HOLDER</b>	
+ .8 (.030")			
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	8/18/2007	BH44AASF	