
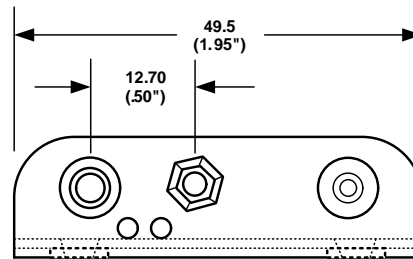


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
1/12/08	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	

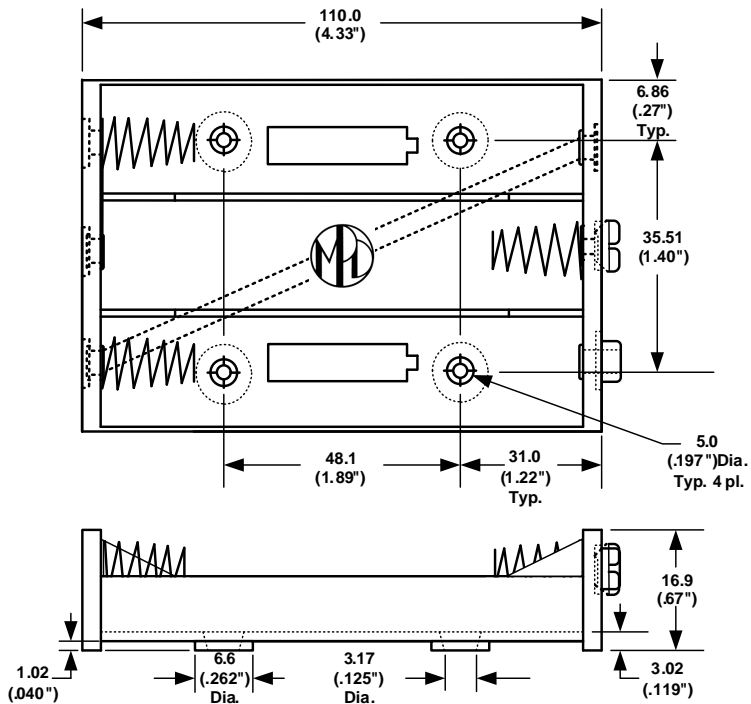


ORDERING CODE BH36AA

SPECIFICATIONS :

Plastic material - High impact ABS
 Springs - nickel plated spring steel
 Wire - 152.4 mm Ref. Long 26 AWG,
 UL1007, CSA - TR-64, 300V, 80°C.
 Rivets - Brass, nickel plated
 9 Volts Snaps - Brass, nickel plated
 ROHS COMPLIANT

SOLDER LUGS	= L
(6") WIRE LEADS	= W
9 VOLT TYPE SNAPS	= SF
PC PINS	= PC

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL	+ .5 (.020") - .5 (.020")	SCALE	DRAWN BY B.S.
FRACTIONAL		NONE	APPROVED BY
ANGULAR	+ 3° - 3°	TITLE SIX "AA" CELL HOLDER	
	DATE 1/12/2008	DRAWING NUMBER BH36AASF	