

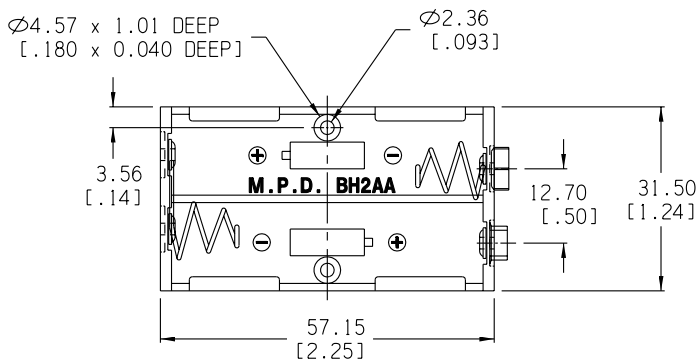


Date	SYM	REVISION RECORD	AUTH	DR	CK
12/26/03	A	Changed Material Specification	T.B.	B.S.	

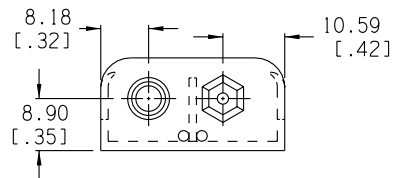

MOUNTING INSTRUCTION:


USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.



INTER CONNECTION SCHEMATIC

NOTES:

MATERIAL:
 HOUSING: IMPACT RESISTANCE NYLON #6, BLACK, UL 94V-0, MATERIAL FILE #UL E 48285
 SPRING: SPRING STEEL, NICKLE PLATED
 CONTACTS: SPRING STEEL, NICKLE PLATED
 EYELETS: BRASS, NICKLE PLTD.
 TERMINALS: BRASS, NICKLE PLTD., SNAP FASTENER MALE/FEMALE TERMINALS

Tolerance (Inches)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal		Scale	Drawn By B.S.
±.5 (.020)			Approved By T.B.
Fractional	Title		
± .8 (.030)	2AA BATTERY HOLDER WITH SNAP FASTENERS		
Angular	Date	Drawing Number	
± 3°	12/26/03	BH2AA-SF	