

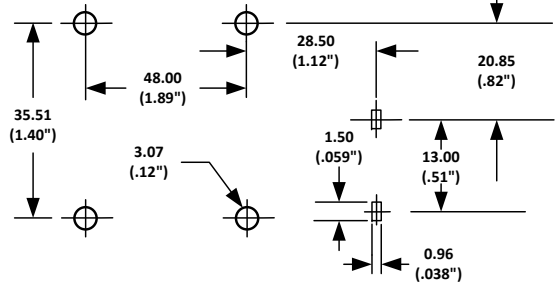
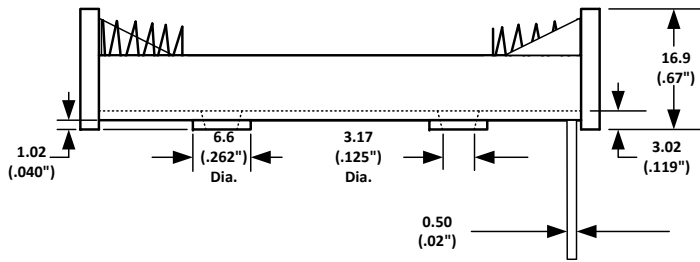


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
3/25/11	A	Dim. 0.89 was .089 (typo)	T.B.	B.S.	

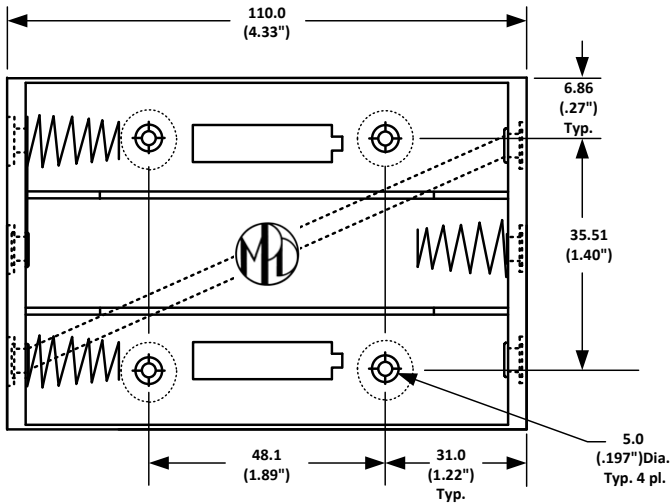

PCB LAYOUT

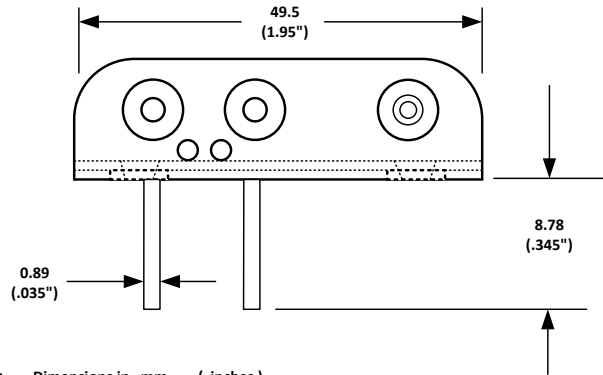


Note: Dimensions in mm. ( inches )

ORDERING CODE **BH36AA**

**SPECIFICATIONS :**

Plastic material - High impact ABS  
 Springs - nickel plated spring steel  
 Wire - 152.4 mm Ref.Long 26 AWG,  
 UL1007, CSA - TR-64, 300V, 80°C.  
 Rivets - Brass, nickel plated  
 9 Volts Snaps - Brass, nickel plated

SOLDER LUGS	= L
(6") WIRE LEADS	= W
9 VOLT TYPE SNAPS	=SF
PC PINS	=PC

TOLERANCES (EXCEPT AS NOTED)		 <b>Memory Protection Devices, Inc.</b> 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL	+ .5 (.020") - .5 (.020")	SCALE	DRAWN BY B.S.
		NONE	APPROVED BY
FRACTIONAL	+ .8 (.030") - .8 (.030")	TITLE <b>SIX "AA" CELL HOLDER</b>	
ANGULAR	+ 3° - 3°	DATE 03/25/2011	DRAWING NUMBER <b>BH36AAPC</b>