
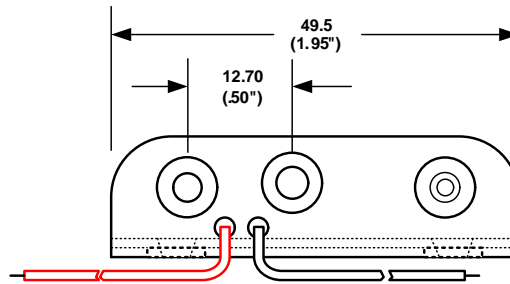
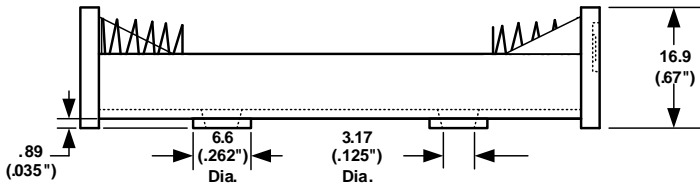


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
2/03/07	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	

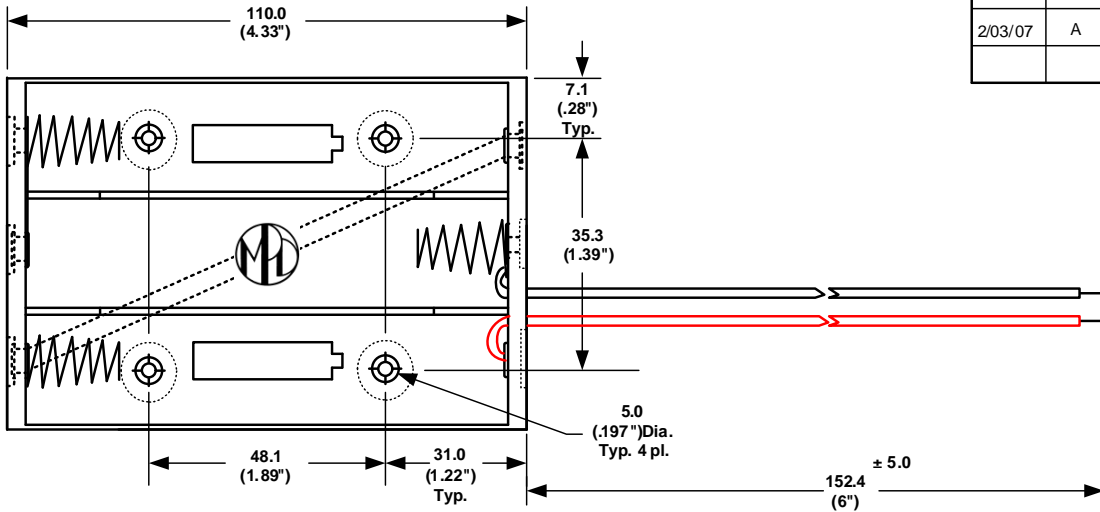


Note: Dimensions in mm. (inches)

ORDERING CODE BH36AA

SPECIFICATIONS :

Plastic material - High impact ABS
 Springs - nickel plated spring steel
 Wire - 152.4 mm Ref. Long 26 AWG,
 UL1007, CSA - TR-64, 300V, 80°C.
 Rivets - Brass, nickel plated
 9 Volts Snaps - Brass, nickel plated
 ROHS COMPLIANT

SOLDER LUGS	= L
(6") WIRE LEADS	= W
9 VOLT TYPE SNAPS	= SF
PC PINS	= PC

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL	SCALE		
+ .5 (.020")	NONE	APPROVED BY	
FRACTIONAL	TITLE		
+ .8 (.030")	SIX "AA" CELL HOLDER		
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	2/03/2007	BH36AAW	