

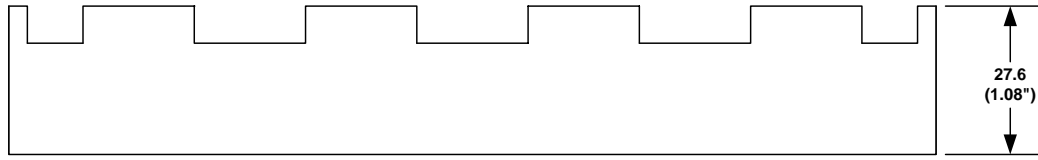


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

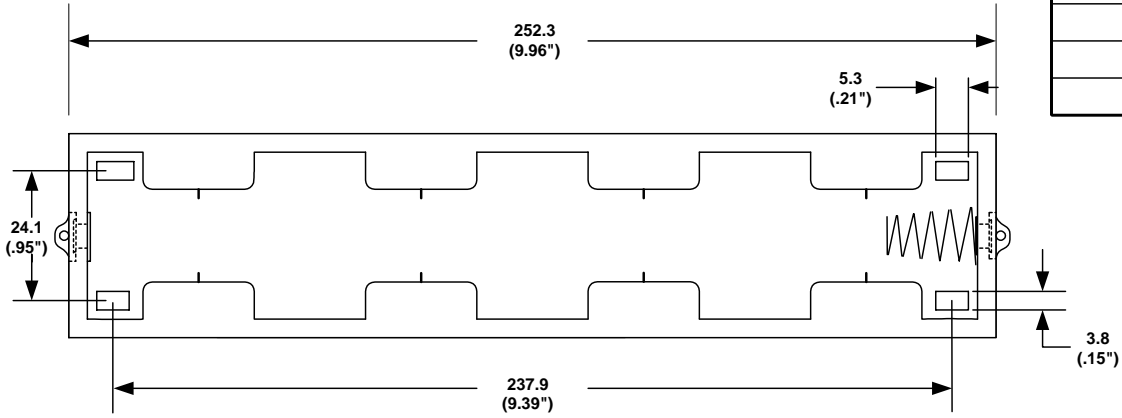

SOLDER LUGS SHOWN ABOVE


ORDERING CODE **BH14D**

SPECIFICATIONS :

- Plastic material - polypropylene
- Springs - nickel plated spring steel
- Wire - 152.4 mm Ref.Long 26 AWG, UL1007, CSA - TR-64, 300V, 80°C.
- Rivets - Brass, nickel plated
- 9 Volts Snaps - Brass, nickel plated

SOLDER LUGS = L
WIRE LEADS = W

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL	SCALE		
+ .5 (.020")	-----	APPROVED BY	
FRACTIONAL	TITLE		
+ .8 (.030")	FOUR "D" CELL HOLDER		
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	07/24/2000	BH14DL	