



DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

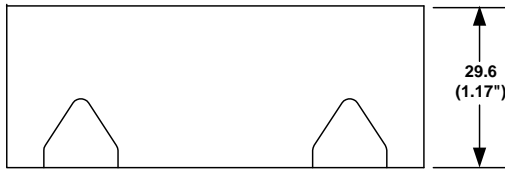

SOLDER LUGS SHOWN ABOVE

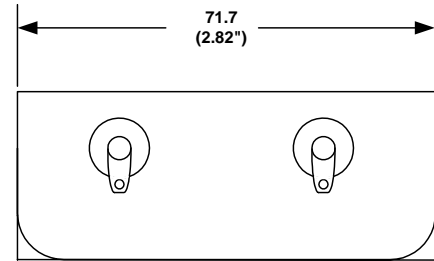

Note: Dimensions in mm. (inches)

ORDERING CODE **BC24D**

SPECIFICATIONS:

- Plastic material - polypropylene
- Springs - nickel plated spring steel
- Wire - 152.4 mm Long 26 AWG, UL1007, CSA - TR-64, 300V, 80°C.
- Rivets - Brass, nickel plated
- 9 Volts Snaps - Brass, nickel plated

SOLDER LUGS	= L
(6") WIRE LEADS	= W
9VOLT TYPE SNAPS	= SF
BUMP PLATES	= B

TOLERANCES (EXCEPT AS NOTED)		Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL	+ .5 (.020")	SCALE	DRAWN BY S.C.
FRACTIONAL	+ .8 (.030")	APPROVED BY	
ANGULAR	+ 3°	TITLE	
	DATE 08/07/2000	DRAWING NUMBER	
		FOUR "D" CELL HOLDER BC24DL	