

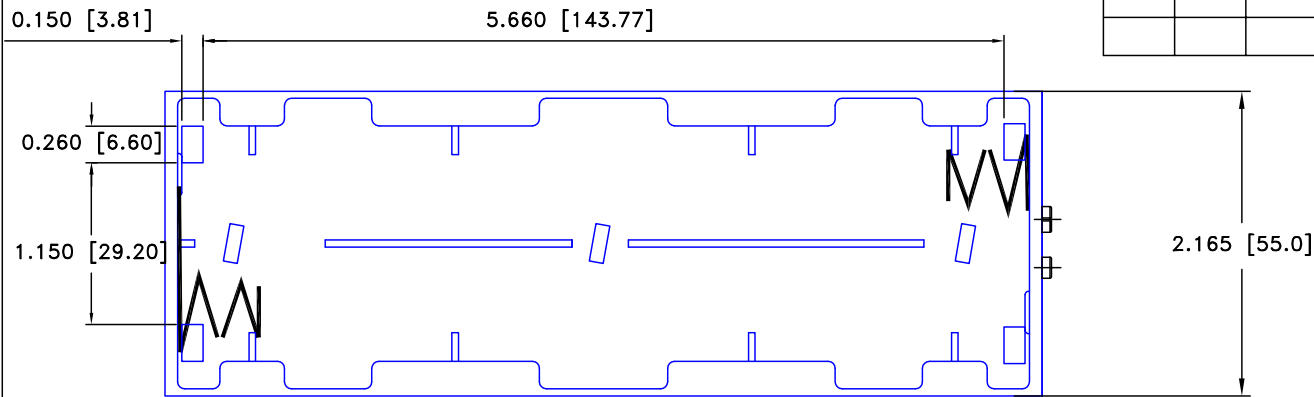


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
4/22/06	A	Added "ROHS COMPLIANT"	T.B.	B.S.	

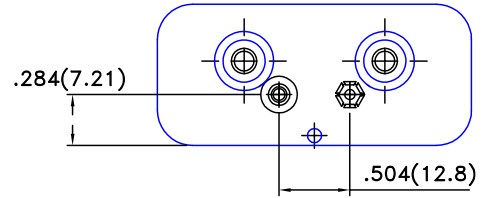


9 VOLT SNAPS TYPE SHOWN

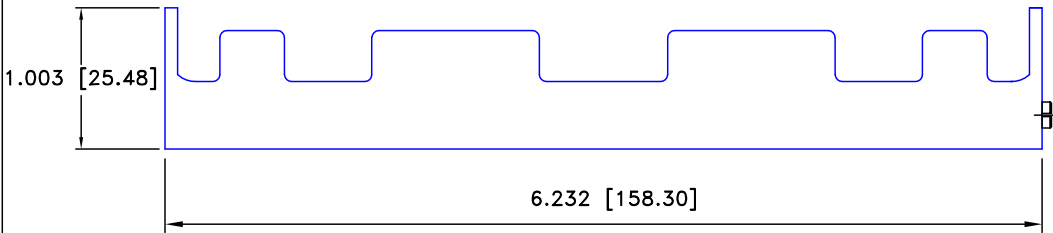

ORDERING CODE BH26C

SPECIFICATION:  
 1. MATERIAL:  
 HOUSING : BLACK POLYPROPYLENE, PP-1040  
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959  
 TEMPERATURE RANGE: -10°C to +100°C  
 RIVETS: BRASS, NICKLE PLTD.  
 SPRING: SPRING STEEL, NICKLE PLTD.  
 WIRE: 26AWG, UL1007, CSA, TR64  
 9VOLT SNAPS: BRASS, NICKLE PLATED  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER  
 EIA-540J000  
 ROHS COMPLIANT

L-Solder Lugs  
 W-(6") Wire Leads  
 SF-9Volt type snaps  
 B- Bump plates

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
decimal ±.5 (.020)		1.5=1	Approved By T.B.
Fractional ±.8 (.030)	Title SIX "C" CELL HOLDER		
Angular ± 3°	Date 4/22/06	Drawing Number BH26CSF	