
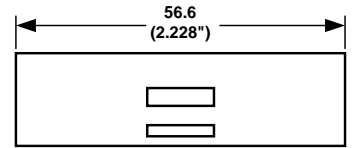


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

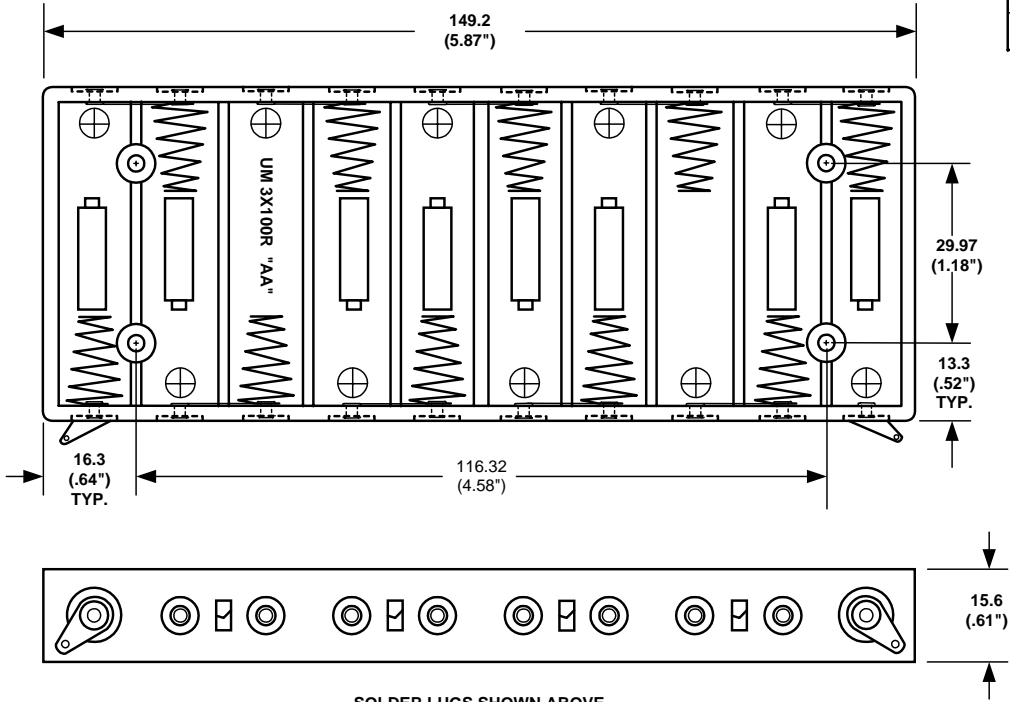

SOLDER LUGS SHOWN ABOVE


ORDERING CODE **BH10AA**

**SPECIFICATIONS :**

- Plastic material - polypropylene
- Springs - nickel plated spring steel
- Wire - 152.4 mm Ref.Long 26 AWG, UL1007, CSA - TR-64, 300V, 80 C.
- Rivets - Brass, nickel plated
- 9 Volts Snaps - Brass, nickel plated

SOLDER LUGS	= L
(6") WIRE LEADS	= W
9 VOLT TYPE SNAPS	= SF

Note: Dimensions in mm. ( inches )

TOLERANCES (EXCEPT AS NOTED)	 <b>Memory Protection Devices, Inc.</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
DECIMAL + .5 (.020") - .5 (.020")	SCALE NONE	DRAWN BY S.C. APPROVED BY	
FRACTIONAL + .8 (.030") - .8 (.030")	TITLE <b>TEN "AA" CELL HOLDER</b>		
ANGULAR + 3° - 3°	DATE 02/26/2001	DRAWING NUMBER <b>BH10AAL</b>	