


SOLDER LUGS SHOWN ABOVE

DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

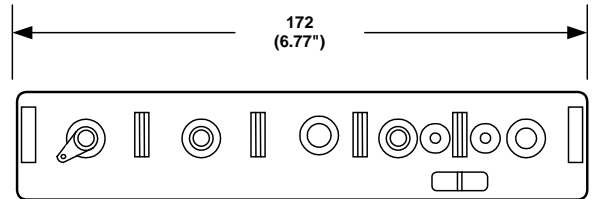


Note: Dimensions in mm. ( inches )

**SPECIFICATIONS:**

Plastic material - polypropylene  
 Springs - nickel plated spring steel  
 Wire - 152.4 mm Ref. Long 26 AWG,  
 UL1007, CSA - TR-64, 300V, 80°C.  
 Rivets - Brass, nickel plated  
 9 Volts Snaps - Brass, nickel plated

**ORDERING CODE BH5D**

<b>SOLDER LUGS</b>	= L
<b>( 6" ) WIRE LEADS</b>	= W
<b>9VOLT TYPE SNAPS</b>	= SF

TOLERANCES (EXCEPT AS NOTED)		 <b>Memory Protection Devices, Inc.</b> 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL	+ .5 (.020")		
FRACTIONAL	+ .8 (.030")	APPROVED BY	
ANGULAR	+ 3°	TITLE	
DATE	12/06/2000	DRAWING NUMBER	
		<b>FIVE "D" CELL HOLDER</b>  <b>BH5DL</b>	