
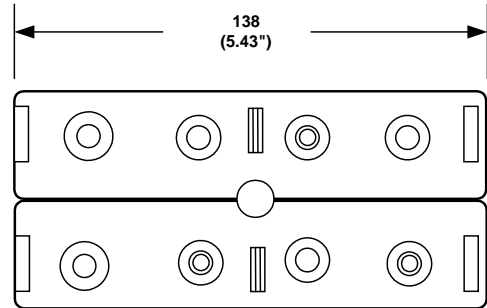


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

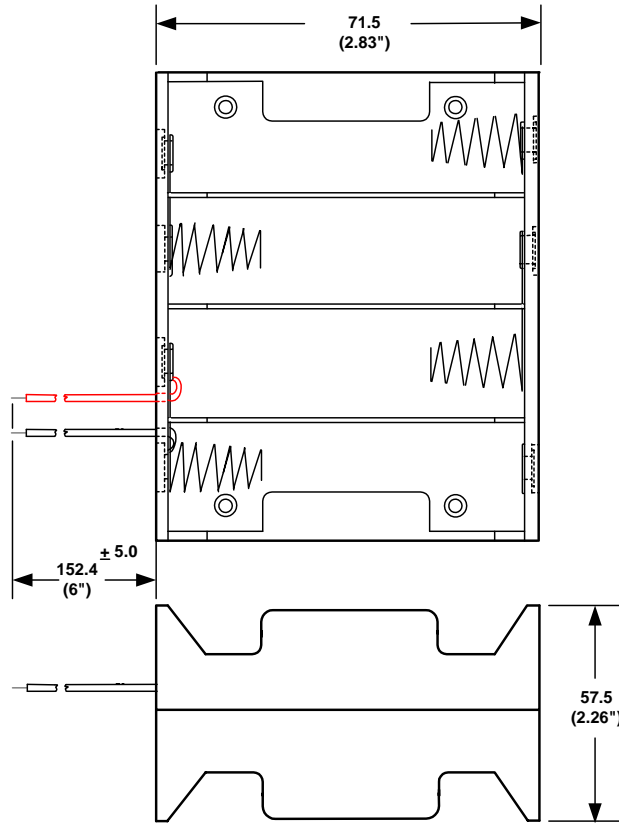

WIRE LEADS SHOWN ABOVE


ORDERING CODE **BH48D**

<b>SOLDER LUGS</b>	= L
<b>(6") WIRE LEADS</b>	= W
<b>9VOLT TYPE SNAPS</b>	= SF

**SPECIFICATIONS:**

- Plastic material - polypropylene
- Springs - nickel plated spring steel
- Wire - 152.4 mm Ref. Long 26 AWG, UL1007, CSA - TR-64, 300V, 80°C.
- Rivets - Brass, nickel plated
- 9 Volts Snaps - Brass, nickel plated

Note: Dimensions in mm. ( inches )

TOLERANCES (EXCEPT AS NOTED)		 <b>Memory Protection Devices, Inc.</b> 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL	SCALE		
+ .5 (.020")	-----	APPROVED BY	
FRACTIONAL	TITLE		
+ .8 (.030")	EIGHT "D" CELL HOLDER		
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	11/16/2000	BH48DW	