


CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

PART NUMBER	CURRENT RATING (A)	BODY COLOR	RATED VOLTAGE
0295020.MXJ	20	LIGHT BLUE	32V
0295030.MXJ	30	PINK	
0295040.MXJ	40	GREEN	
0295050.MXJ	50	RED	
0295060.MXJ	60	YELLOW	
0295070.MXJ	70	BROWN	
0295080.MXJ	80	BLACK	
0295100.MXJ	100	BLUE	
0295120.MXJ	120	WHITE	
0295140.MXJ	140	REDDISH BROWN	

% OF RATED CURRENT	OPENING TIME	
	MIN	MAX
110%	14,400 SEC.	-
200%	5 SEC.	100 SEC.
350%	0.2 SEC.	7 SEC.
600%	0.04 SEC.	1 SEC.

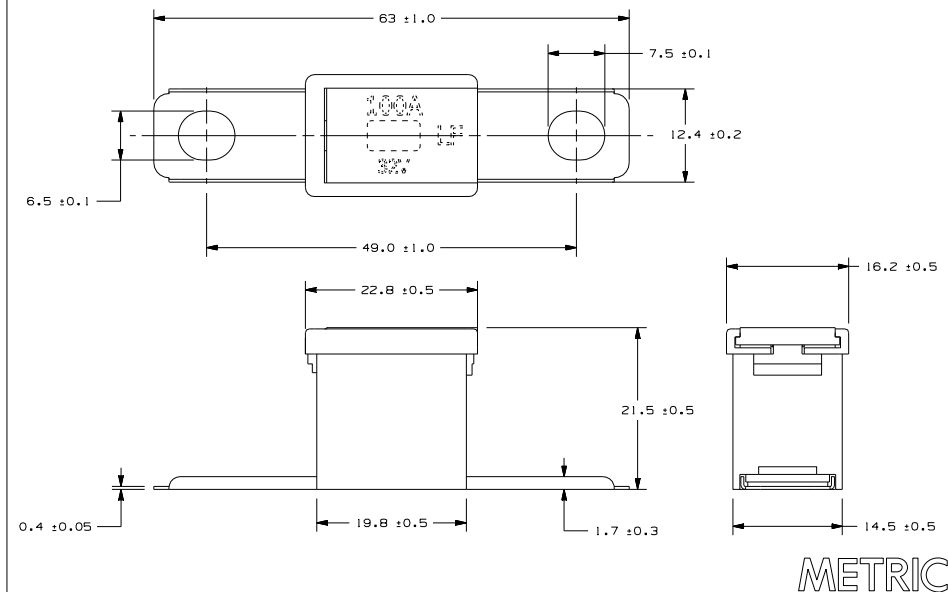

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [] ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

© DENOTES CRITICAL CHARACTERISTICS.

CPK DENOTES CPK DIMENSIONS. -MINIMUM CPK VALUE

ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS VARIATION. THIS CHARACTERISTIC IS USED FOR TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS

CP DENOTES CP DIMENSIONS. -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SPECIFIED. DIMENSIONS ARE TO BE LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
BILL OF MATERIAL				
MATERIAL SPEC				
COPIES TO				
1	9	18	FINISH	
2	10	19	SCALE	
3	12	20	DATE	
4	13	21	DATE	03/29/10
5	14	23	CHK	GMB
6	15	33	DATE	SUPER DR
7	16	43	DATE	FINISH GOOD WT
8	17	53	APPD	GRAMS/PIECE
TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. 150.2768-MK1)				
DIMENSION				
0.5 - 0.3				
0.3 - 0.2				
0.2 - 0.1				
0.1 - 0.05				
0.05 - 0.02				
0.02 - 0.01				
3RD ANGLE PROJECTION				
TITLE FUSE - PAL 295 AT I 32V SLOW BLOW				
REVISION DRWG. NO. C OL - 0295000.MXJ				
OUTLINE				
LITTELFUSE DES PLAINES, ILLINOIS 60016				

LTR	DATE	REVISION	CHK	APD
A	03/29/10	SA201-RELEASE GMB		
B	05/25/10	SA296-RELEASE 30A THROUGH 100A GMB		
C	06/07/10	SA314-RELEASE 120A GMB		