



DIALIGHT PART NUMBER	PACKAGING	LED COLOR
597-3002-502F	SAMPLE STRIP	
597-3002-507F	7" REEL	AlInGaP RED (630 nm)
597-3032-502F	SAMPLE STRIP	
597-3032-507F	7" REEL	AlInGaP RED (620 nm)
597-3202-502F	SAMPLE STRIP	
597-3202-507F	7" REEL	AlInGaP ORANGE
597-3402-502F	SAMPLE STRIP	
597-3402-507F	7" REEL	AlInGaP YELLOW
597-3502-502F	SAMPLE STRIP	
597-3502-507F	7" REEL	AlInGaP GREEN (560 nm)
597-3312-502F	SAMPLE STRIP	
597-3312-507F	7" REEL	InGaN GREEN (525 nm)
597-3602-502F	SAMPLE STRIP	
597-3602-507F	7" REEL	InGaN BLUE
597-3902-502F	SAMPLE STRIP	
597-3902-507F	7" REEL	InGaN WHITE

RoHS COMPLIANT 597-3XX2-50XF

Part Numbers with the "F" suffix ending are RoHS Compliant.
For example: 597-3002-502F
Reel and bag packaging are marked with "RoHS Compliant"
label or equivalent markings. These parts can be used with
RoHS reflow profile. Parts can be wave soldered, dip soldered
or hand soldered using typical lead-free soldering process
with max 260°C temp. for 5 sec.

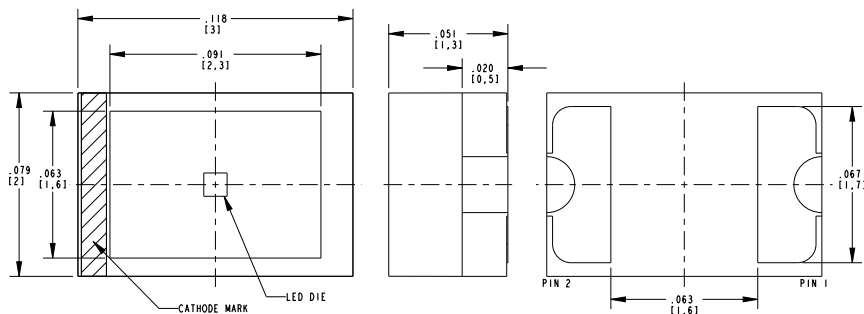



REV	ECN NO	REVISIONS	DRN	CHK	APP	DATE
A		NEW RELEASE	AJF	KLJ	NO	9-22-10

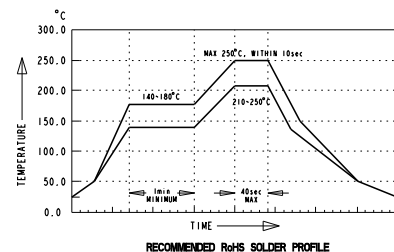

OPERATING CHARACTERISTICS AT 25°C AMBIENT															
LED COLOR	LUMINOUS INTENSITY ØIr = 20 mA (mcd)			FORWARD VOLTAGE ØIr = 20 mA (V)			REVERSE CURRENT (µA)			DOMINANT WAVELENGTH (nm)		PEAK WAVELENGTH (nm)		VIEWING ANGLE (DEG)	
	MIN	TYP	MAX	TYP	MAX	MAX	MIN	TYP	MAX	TYP	MAX	TYP	MAX	TYP	MAX
AlInGaP RED (630 nm)	25	63	160	2.2	2.7	10	625	630	635	630	110				
AlInGaP RED (620 nm)	40	100	250	2.2	2.7	10	615	620	625	620	110				
AlInGaP ORANGE	63	160	400	2.2	2.7	10	602	605	608	605	110				
AlInGaP YELLOW	63	160	400	2.2	2.7	10	587	590	593	590	110				
AlInGaP YELLOW GREEN	10	25	63	2.2	2.7	10	569	572	575	572	110				
GREEN (560 nm)	9	18	36	2.1	2.5	10	558	560	564	565	110				
InGaN GREEN (525 nm)	56	140	360	3.2	4.0	100	520	525	535	523	110				
InGaN BLUE	36	100	—	3.3	4.2	100	465	470	475	468	110				
InGaN WHITE	360	900	—	3.2	4.3	100	*X=0.3; Y=0.3				110				

*CHROMATICITY COORDINATES (TYP)

*CHROMATICITY COORDINATES (TYP)

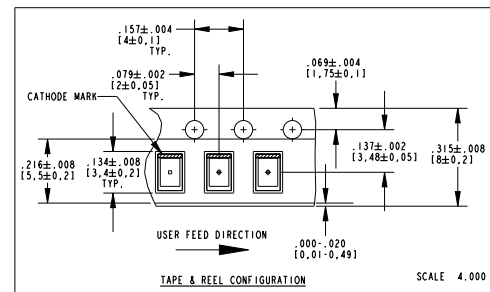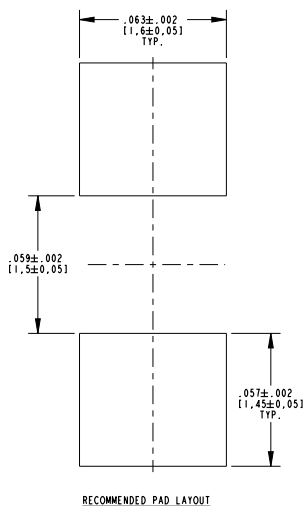

NOTES:

1. EPOXY COLOR: WATER CLEAR.
2. MOISTURE SENSITIVITY LEVEL: 3.
3. TAPE & REEL AS PER EIA STANDARD 481-1-A; CATHODE TOWARDS SPROCKET.
4. TAPE & REEL MAY REQUIRE RE-TAPING AFTER 12 MONTHS.
5. PIN NUMBERS ARE FOR REFERENCE ONLY. DESIGNATION NON-EXISTENT ON PART.
6. DIALIGHT PART NUMBERS: 597-3XX2-50XF.
7. ...-502F SUFFIX MEANS PARTS PACKAGED ON A 20 PCS SAMPLE STRIP.
8. ...-507F SUFFIX MEANS PARTS PACKAGED ON A 7" (Ø180mm) REEL, 2,500 PCS/REEL.
9. PACKAGING TO INCLUDE LABEL CONTAINING DIALIGHT PART NUMBER, DATE CODE/LOT NO., LUMINOUS INTENSITY AND COLOR BINS, QTY/REEL, AND COUNTRY OF ORIGIN.
10. THIS ASSEMBLY CONTAINS ELECTROSTATIC DISCHARGE SENSITIVE DEVICES (ESDS). MAINTAIN ALL PRECAUTIONARY MEASURES DURING ASSEMBLY, HANDLING AND STORAGE IN ACCORDANCE WITH IPC-A-610.

ABSOLUTE MAXIMUM RATINGS AT 25°C AMBIENT	LED COLOR						UNITS
	AlInGaP RED (630 nm)	AlInGaP RED (620 nm)	AlInGaP ORANGE	AlInGaP YELLOW	AlInGaP Y/G	GREEN (560 nm)	
POWER DISSIPATION	54	54	54	54	54	62	mW
CONTINUOUS FORWARD CURRENT	20	20	20	20	20	25	mA
PEAK FORWARD CURRENT (1/10 DUTY CYCLE, 0.1ms PULSE WIDTH)	100	100	100	100	100	60	mA
LINEAR DERATING	0.26 (FROM 40°C)						0.50 (FROM 70°C)
REVERSE VOLTAGE	5						V
STORAGE TEMPERATURE	-40 TO +100						°C
OPERATING TEMPERATURE	-40 TO +85						°C



ATTENTION:
OBSERVE PRECAUTIONS FOR
HANDLING ELECTROSTATIC
SENSITIVE DEVICES

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.			
SCALE: 30.000	DRAWING NUMBER	REV	
ALL DIM'S IN: INCHES (MM)	C-17866	A	
TOLERANCES: FRACTIONS: ±1/64 DECIMALS: ±.01; ±.02 DECIMALS: ±.001; ±.005	TITLE 1208 CHIP LED WITH REFLECTOR RoHS COMPLIANT	MATERIAL	
ANGLES: ±1°	Dialight	1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727	
FINISH:	83330	SHEET 1 OF 1 FAMILY TABLE:	