








PART NUMBER	LED COLOR		
	POSITION 1	POSITION 2	POSITION 3
564-0100-821	GREEN DIFFUSED	RED DIFFUSED	ORANGE DIFFUSED



- NOTES:
- 1- THIS PRODUCT USES SPECIAL BIN OF GREEN LED FOR VOLTAGE RANGE
 - 2- LEADS TO FIT INTO HOLES SPACED AS PER HOLE PATTERN
 - 3- LEADS TO BE FREE OF DEFORMATION AFTER BENDING AND CUTTING
 - 4- LED LEAD DIMENSIONS SHOWN ARE MEASURED AT HOUSING EXIT.
 - 5- .020 SQ = ORANGE
 - 6- .018 X .016 = RED, GREEN
 - 6- DIALIGHT PART NUMBER = 564-0100-821



LEGEND AREA
PRINT WITH APPROPRIATE PART No

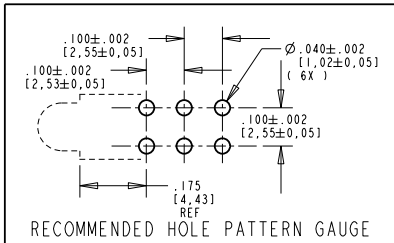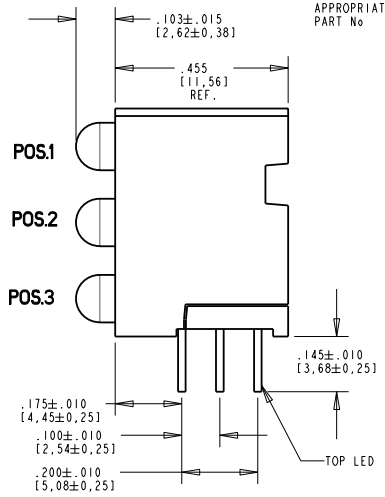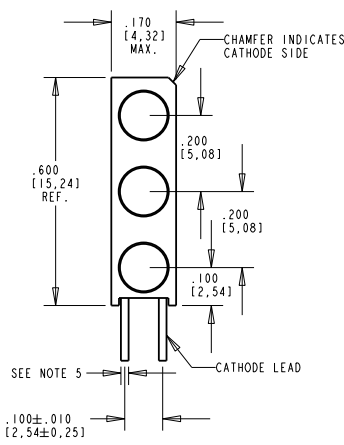

REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A		NEW RELEASE	TWC			

OPERATING CHARACTERISTICS AT 25°C AMBIENT						
CHARACTERISTICS		MIN	TYP	MAX	UNITS	TEST CONDITIONS
LUMINOUS INTENSITY	GREEN	4.7	12.6		mcd	I _r = 20 mA
	RED	7.4	10.0			
	ORANGE	112		280		
FORWARD VOLTAGE	GREEN		2.1	2.8	V	I _r = 20 mA
	RED		2.0	2.8		
	ORANGE	1.85		2.35		
REVERSE CURRENT	GREEN			100	µA	V _r = 5 V
	RED			100		
	ORANGE			10		
PEAK WAVELENGTH	GREEN		565		nm	I _r = 20 mA
	RED		635			
	ORANGE		610			
VIEWING ANGLE	GREEN		60		Degree	
	RED		60			
	ORANGE		70			
DOMINANT WAVELENGTH	GREEN				pf	I _r = 20 mA
	RED					
	ORANGE		610			

ABSOLUTE MAXIMUM RATING AT 25°C AMBIENT	GREEN	RED	ORANGE	UNITS
POWER DISSIPATION	100	100	80	mW
DERATE LINEARLY	.4 FROM 50 °C	.4 FROM 50 °C		mA/°C
LEAD SOLDERING TEMPERATURE, 5 SEC., 1/16" FROM BODY	260	260	260	°C
OPERATING TEMPERATURE	-55 TO +100	-55 TO +100	-55 TO +100	°C
STORAGE TEMPERATURE	-55 TO +100	-55 TO +100	-55 TO +100	°C

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.

SCALE: 4,000

DRAWING NUMBER: C-17225

REV: A

TITLE: 3X1 CB1 BLOCK G, R, O

MATERIAL:

FINISH:

Dialight 1501 ROUTE 34 SOUTH, FARMINGDALE, NJ 07727

FSCM 83330 SHEET 1 OF 1 FAMILY TABLE: