


ALM-1812

GPS Filter-LNA-Filter Front-End Module



Data Sheet




Description

Avago Technologies' ALM-1812 is a GPS front-end module that combines a high-gain low-noise amplifier (LNA) with GPS FBAR filters. The LNA uses Avago Technologies' proprietary GaAs Enhancement-mode pHEMT process to achieve high gain with very low noise figure and high linearity. Noise figure distribution is very tightly controlled. A CMOS-compatible shutdown pin is included either for turning the LNA on/off, or for current adjustment. The integrated filter utilizes an Avago Technologies' leading-edge FBAR filter for exceptional rejection at Cell/PCS-Band frequencies.

The low noise figure and high gain, coupled with low current consumption make it suitable for use in critical low-power GPS applications or during low-battery situations.

Component Image

Surface Mount 4.5 x 2.2 x 0.95 mm³ 12-lead MCOB

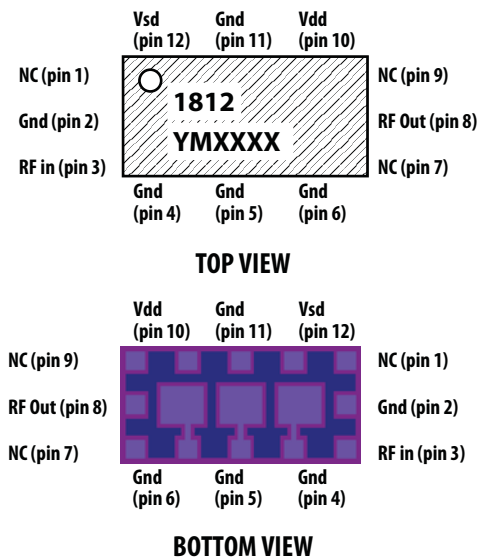

Note:
 Package marking provides orientation and identification
 "1812" = Product Code
 "Y" = Year of manufacture
 "M" = Month of manufacture
 "XXXX" = Last 4 digit of lot number

Features

- Very Low Noise Figure
- Exceptional Cell/PCS-Band rejection
- Low external component count
- Fully-matched at RF input and RF output
- Shutdown current: < 1 uA
- CMOS compatible shutdown pin (SD)
- ESD: > 3kV at RFin pin
- 4.5 x 2.2 x 0.95 mm³ size
- Adjustable bias current via single external resistor/voltage
- Lead-free, Halogen free and meets MSL3

Specifications (Typical performance @ 25°C)


At 1.575GHz, Vdd = 2.8V, Idd = 6.8mA

- Gain = 19.1 dB
- NF = 1.66 dB
- IIP3 = +2 dBm, IP1dB = -8 dBm
- S11 = -10 dB, S22 = -15 dB
- Cell-Band Rejection: > 90dBc
- PCS-Band Rejection: > 85dBc

Application

- GPS Front-end Module

Application Circuit

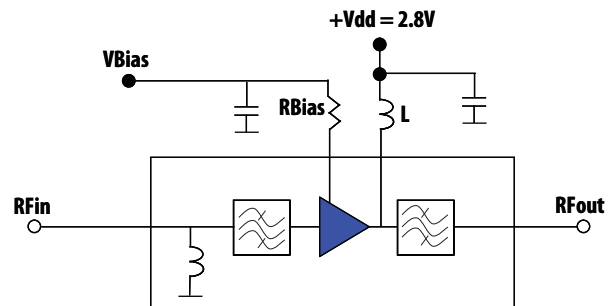

Absolute Maximum Rating ^[1] T_A = 25°C

| Symbol | Parameter | Units | Absolute Max. |
|---------------------|--|-------|---------------|
| V _{dd} | Device Drain to Source Voltage ^[2] | V | 3.6 |
| I _{dd} | Drain Current ^[2] | mA | 15 |
| P _{in,max} | CW RF Input Power (V _{dd} = 2.8V, I _{dd} = 6mA) | dBm | 13 |
| P _{diss} | Total Power Dissipation ^[4] | mW | 54 |
| T _L | Operating Temperature | °C | -40 to 85 |
| T _j | Junction Temperature | °C | 150 |
| T _{STG} | Storage Temperature | °C | -65 to 150 |

Thermal Resistance ^[3]

(V_{dd} = 2.8V, I_{dd} = 6mA) θ_{jc} = 82.1°C/W

Notes:

1. Operation of this device in excess of any of these limits may cause permanent damage.
2. Assuming DC quiescent conditions.
3. Thermal resistance measured using Infra-Red measurement technique.
4. Board (module belly) temperature T_B is 25°C. Derate 4.2 mW/°C for T_B > 145.6°C.

Product Consistency Distribution Charts^[5,6]

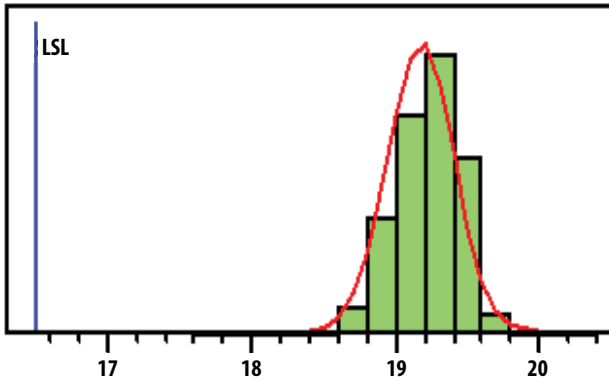


Figure 1. Gain at 1.575 GHz; LSL = 16.5 dB, nominal = 19.1 dB

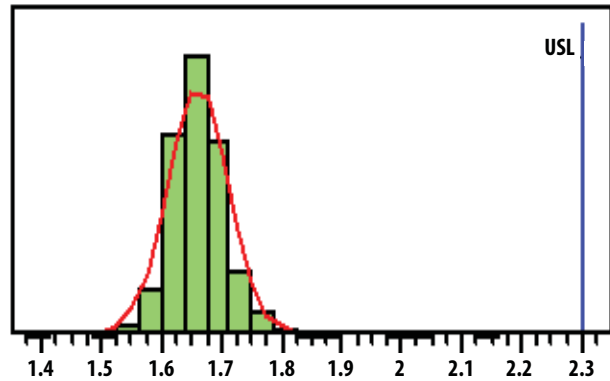


Figure 2. NF at 1.575GHz; USL = 2.30 dB, nominal = 1.66 dB

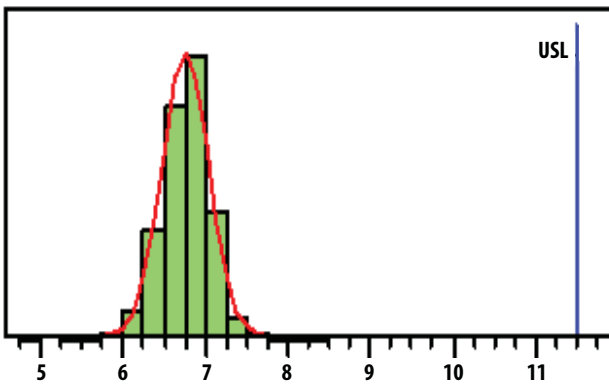


Figure 3. Id at 1.575 GHz; USL = 11.5 mA, nominal = 6.8 mA

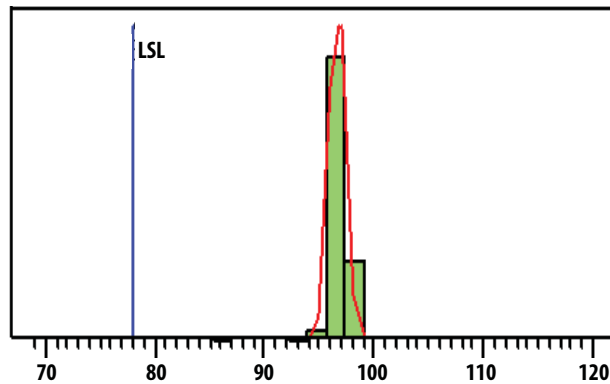


Figure 4. Cell band Rejection at 827.5MHz relative to 1.575 GHz; LSL = 78 dBc, nominal = 96.6 dBc

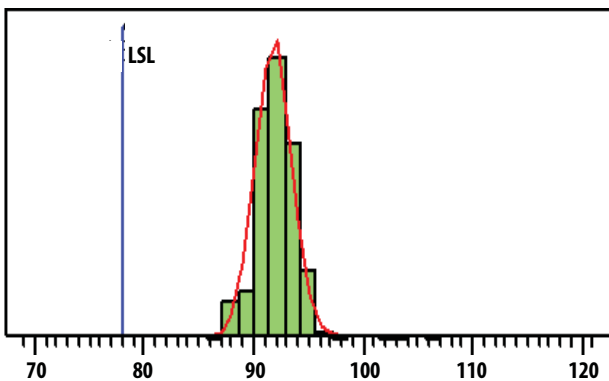


Figure 5. PCS band Rejection at 1885MHz relative to 1.575 GHz; LSL = 78 dBc, nominal = 91.7 dBc

Notes:

5. Distribution data sample size is 3000 samples taken from 3 different LNA wafers and 1 filter wafer. Future wafers allocated to this product may have nominal values anywhere between the upper and lower limits.
6. Measurements are made on a production test board, which represents a trade-off between optimal Gain, NF, IIP3, IP1 dB, VSWR, Cell Band and PCS Band Rejection. Circuit trace losses have not been de-embedded from actual measurements.

Electrical Specifications

T_A = 25°C, Freq = 1.575GHz, measured on demo board^[1] unless otherwise specified – Typical Performance^[1]

Table 1. Performance at Vdd = Vsd = 2.8V, Idd = 6.8mA (R2 = 3.9k Ohm, see Fig 1) nominal operating conditions


| Symbol | Parameter and Test Condition | Units | Min. | Typ | Max. |
|--------------------------|--|-------|------|------|------|
| G | Gain | dB | 16.5 | 19.1 | – |
| NF | Noise Figure | dB | – | 1.66 | 2.3 |
| IP1dB | Input 1dB Compressed Power | dBm | – | -8 | – |
| IIP3 ^[2] | Input 3 rd Order Intercept Point (2-tone @ Fc +/- 2.5MHz) | dBm | – | +2 | – |
| S11 | Input Return Loss | dB | – | -10 | – |
| S22 | Output Return Loss | dB | – | -15 | – |
| S12 | Reverse Isolation | dB | – | -30 | – |
| Cell Band Rejection | Relative to 1.575GHz @ 827.5MHz | dBc | 78 | 96.6 | – |
| PCS Band Rejection | Relative to 1.575GHz @ 1885MHz | dBc | 78 | 91.7 | – |
| IP1dB _{890MHz} | Input 1dB gain compression interferer signal level at 890MHz | dBm | | 29 | |
| IP1dB _{1885MHz} | Input 1dB gain compression interferer signal level at 1885MHz | dBm | | 26 | |
| Idd | Supply DC current at Shutdown (SD) voltage Vsd = 2.8V | mA | – | 6.8 | 11.5 |
| Ish | Shutdown Current @ VSD = 0V | uA | – | 0.5 | – |

Table 2. Performance at Vdd = Vsd = 1.8V, Idd = 4mA (R2 = 3.9k Ohm, see Fig 1) nominal operating conditions


| Symbol | Parameter and Test Condition | Units | Typ |
|--------------------------|--|-------|------|
| G | Gain | dB | 16.5 |
| NF | Noise Figure | dB | 1.9 |
| IP1dB | Input 1dB Compressed Power | dBm | -11 |
| IIP3 ^[2] | Input 3 rd Order Intercept Point (2-tone @ Fc +/- 2.5MHz) | dBm | -1 |
| S11 | Input Return Loss | dB | -9 |
| S22 | Output Return Loss | dB | -13 |
| S12 | Reverse Isolation | dB | -29 |
| Cell Band Rejection | Relative to 1.575GHz @ 827.5MHz | dBc | >90 |
| PCS Band Rejection | Relative to 1.575GHz @ 1885MHz | dBc | >85 |
| IP1dB _{890MHz} | Input 1dB gain compression interferer signal level at 890MHz | dBm | 29 |
| IP1dB _{1885MHz} | Input 1dB gain compression interferer signal level at 1885MHz | dBm | 26 |
| Idd | Supply DC current at Shutdown (SD) voltage Vsd = 1.8V | mA | 4 |
| Ish | Shutdown Current @ VSD = 0V | uA | 0.5 |

Notes:

1. Measurements at 1.575GHz obtained using schematic described in Figure 1 below.
2. 1.575GHz IIP3 test condition: F_{RF1} = 1572.5 MHz, F_{RF2} = 1577.5 MHz with input power of -20dBm per tone measured at the worst case side band.

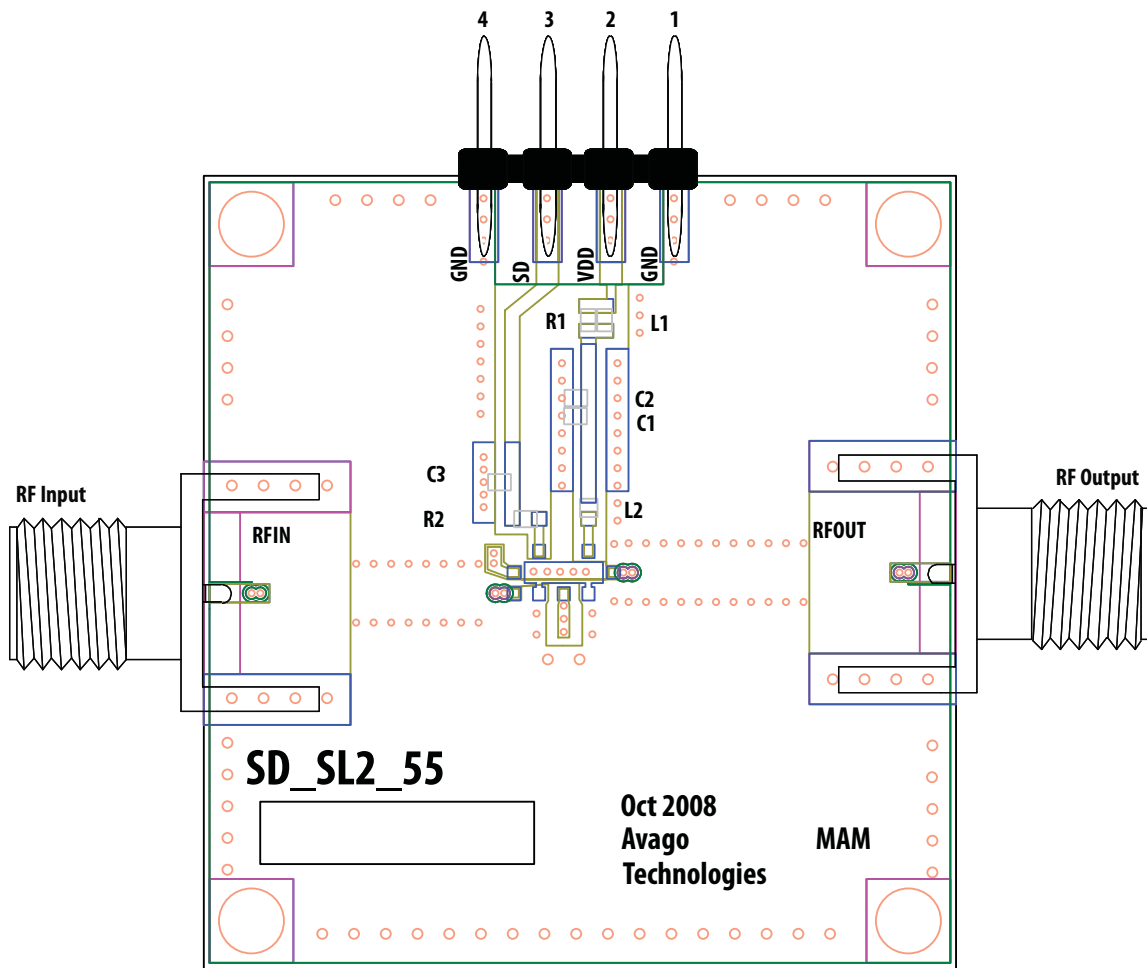

DC Pin Configuration of 4-pin connector



| Circuit Symbol | Size | Description |
|----------------|------|--|
| L1 | 0402 | 22 nH Inductor (Taiyo Yuden HK100522NJ-T) |
| L2 | 0402 | 1.5 nH Inductor (Taiyo Yuden HK10051N5S-T) |
| C1 | 0402 | 0.1 uF Capacitor (Kyocera CM05X5R104K10AH) |
| C2 | 0402 | 47 pF Capacitor (Kyocera CM05CH470J50AHF) |
| C3 | 0402 | 330 pF Capacitor (Kyocera CM05CH331J16AHF) |
| R1 | 0402 | 10 Ohms Resistor (KOA RK73B1ETTB100J) |
| R2 | 0402 | 3.9 kOhm Resistor (KOA RK73B1ETTB392J) |

Figure 6. Demoboard and application circuit components table

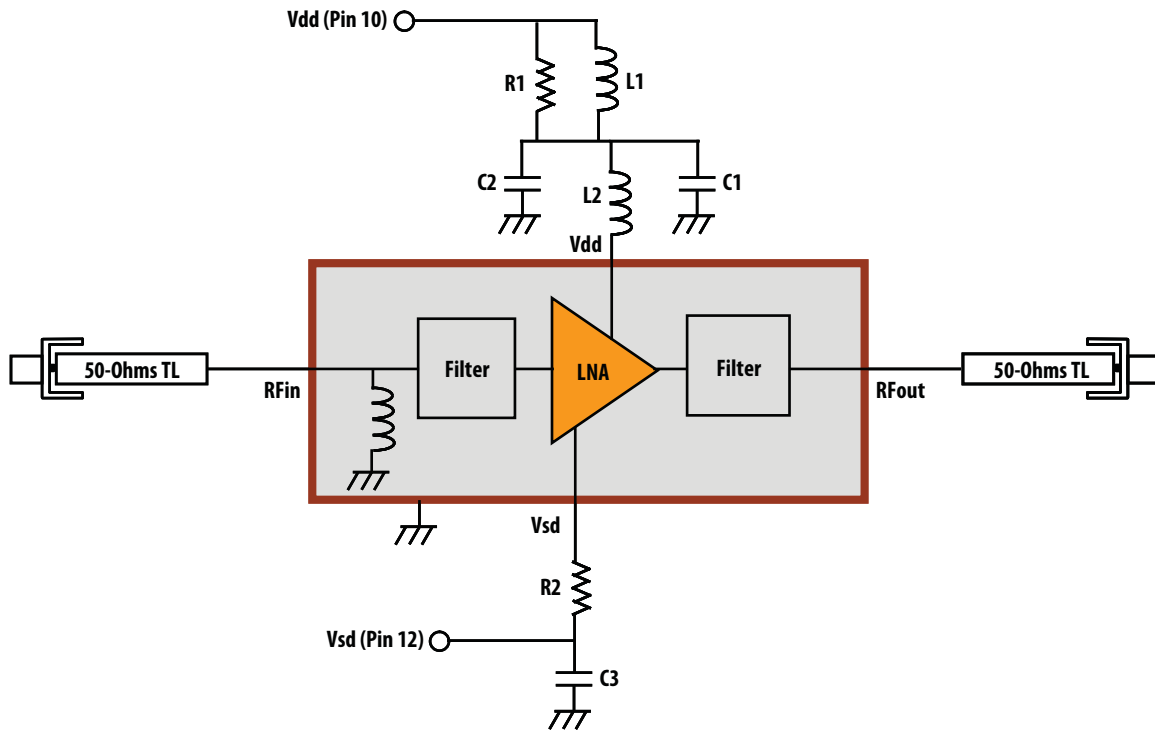


Figure 7. Demoboard and application schematic diagram

Notes

1. The module is fully matched at the input and output RF pins. The RFin pin is directly connected to a shunt inductor that is grounded. The RF output filter blocks DC. Best noise performance is obtained using high-Q wirewound inductors. This circuit demonstrates that low noise figures are obtainable with standard 0402 chip inductors.
2. C2 and L2 form a matching network that affects the frequency response and linearity of the LNA, these can be tuned to optimize gain and return loss.
3. L1 and R1 isolates the demoboard from external disturbances during measurement. It is not needed in actual application. Likewise, C1 and C3 mitigate the effect of external noise pickup on the Vdd and Vsd lines respectively. These components are not required in actual operation.
4. Bias control is achieved by either varying the Vsd voltage with/ without R2, or fixing the Vsd voltage to Vdd and adjusting R2 for the desired current.

ALM-1812 Typical Performance Curves at 25°

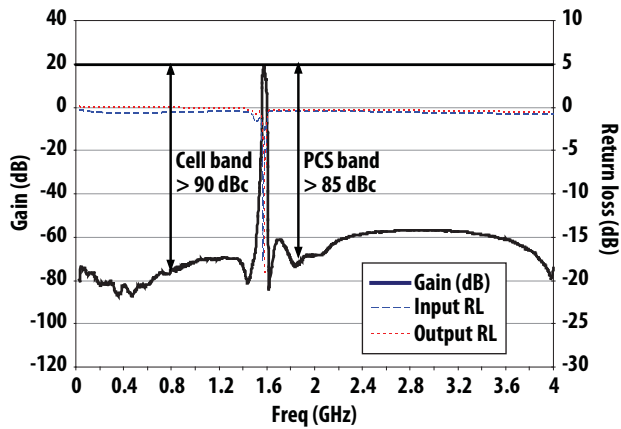


Figure 8a. Typical S-Parameter Plot @ Vdd = 2.8V, Idd = 6.8mA

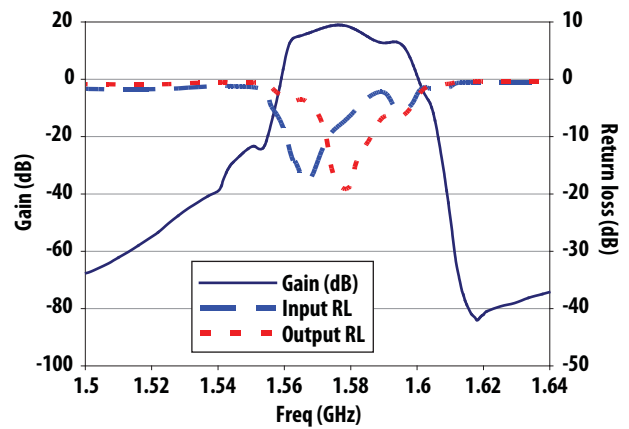


Figure 8b. Passband response of typical S-Parameter Plot @ Vdd = 2.8V, Idd = 6.8mA

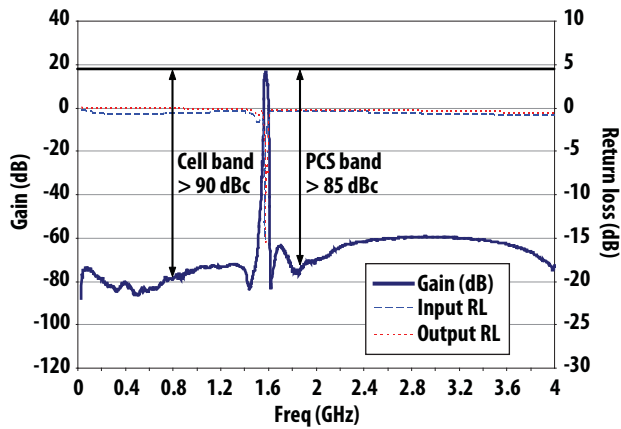


Figure 9a. Typical S-Parameter Plot @ Vdd = 1.8V, Idd = 4mA

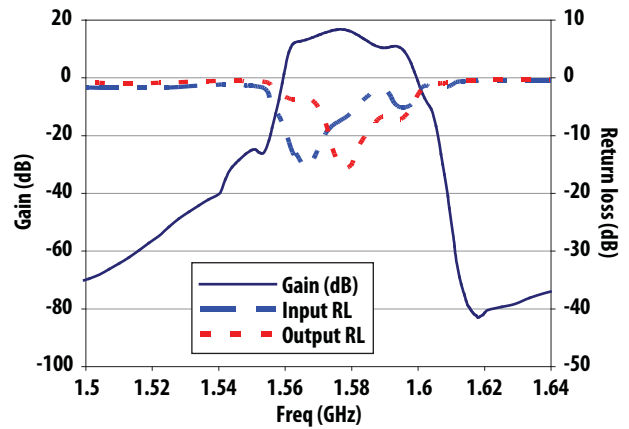


Figure 9b. Passband response of typical S-Parameter Plot @ Vdd = 1.8V, Idd = 4mA

ALM-1812 Typical Performance Curves at 25°C, R2 = 3.9kOhm

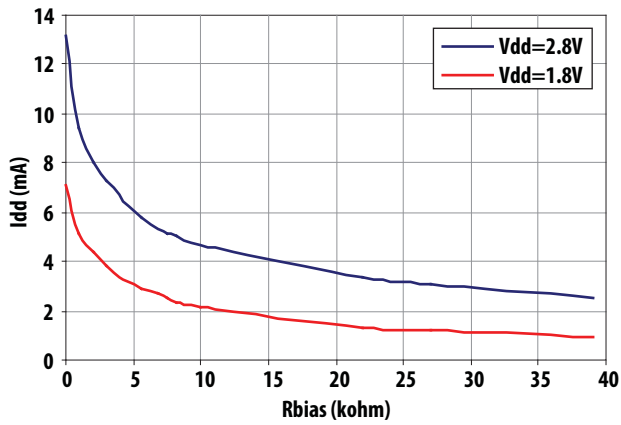


Figure 10. Idd vs Rbias at 25°C

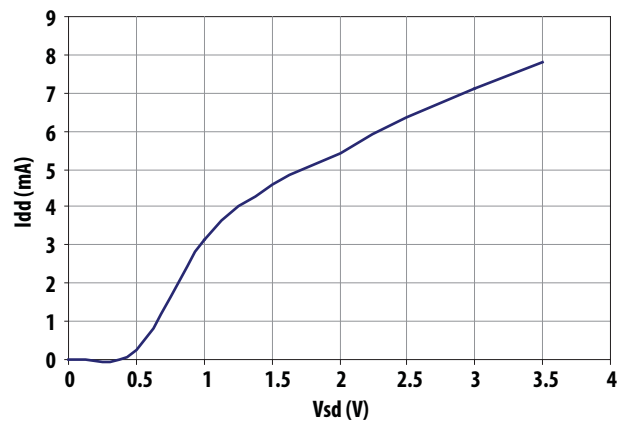


Figure 11. Idd vs Vsd for Vdd = 2.8V, R2 = 3.9k Ohm

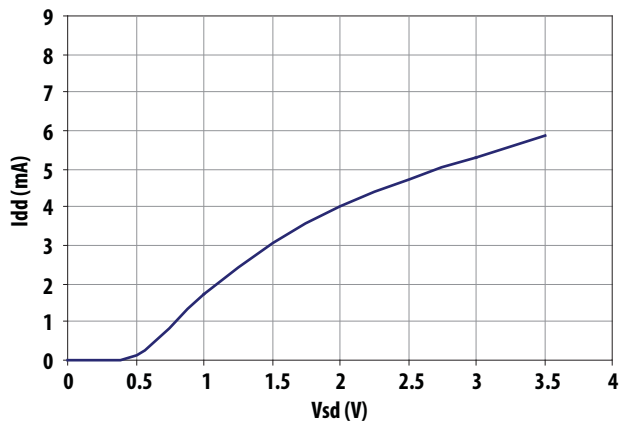


Figure 12. Idd vs Vsd for Vdd = 1.8V, R2 = 3.9k Ohm

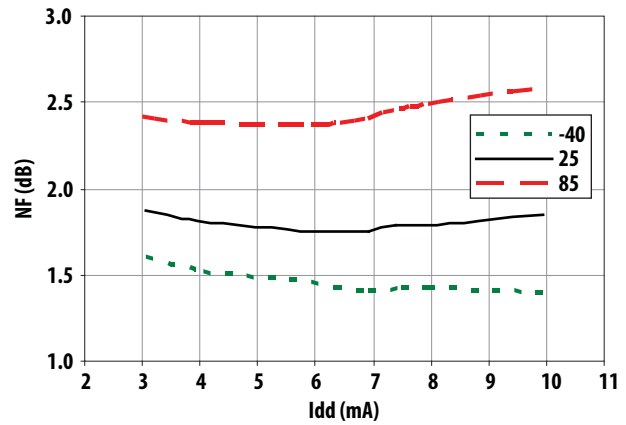


Figure 13. NF vs. Idd at Vdd = 2.8V

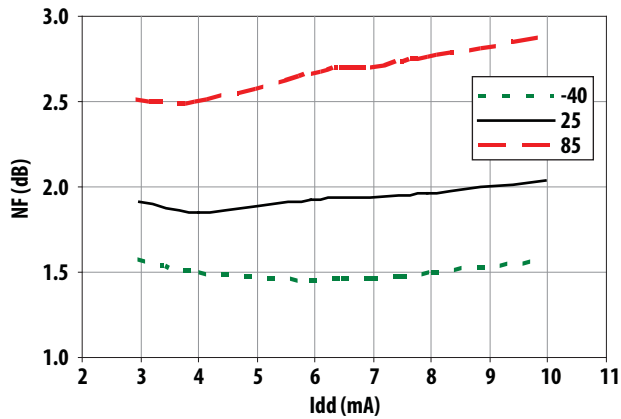


Figure 14. NF vs Idd at Vdd = 1.8V

ALM-1812 Typical Performance Curves at 25°C, R2 = 3.9kOhm (cont'd)

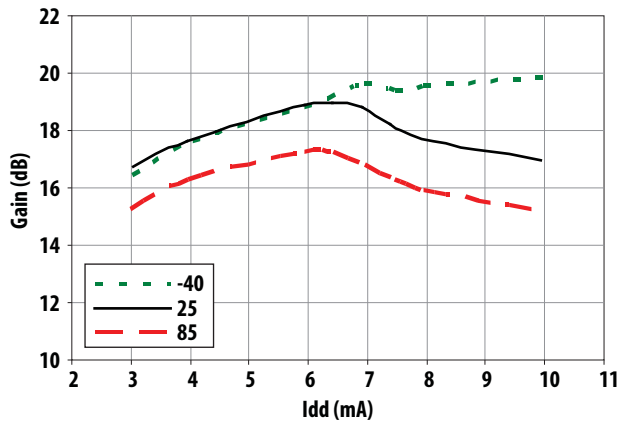


Figure 15. Gain vs. Idd at Vdd = 2.8V

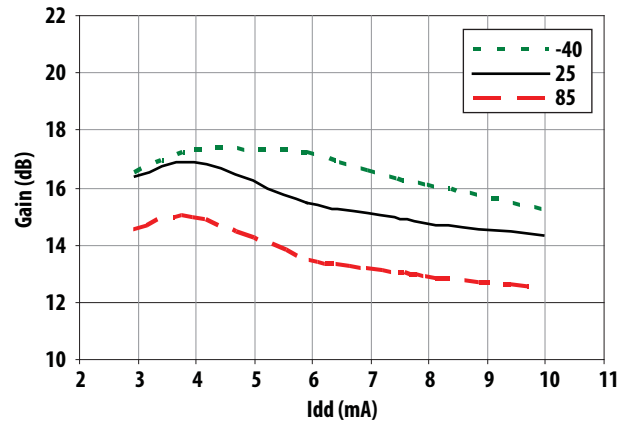


Figure 16. Gain vs. Idd at Vdd = 1.8V

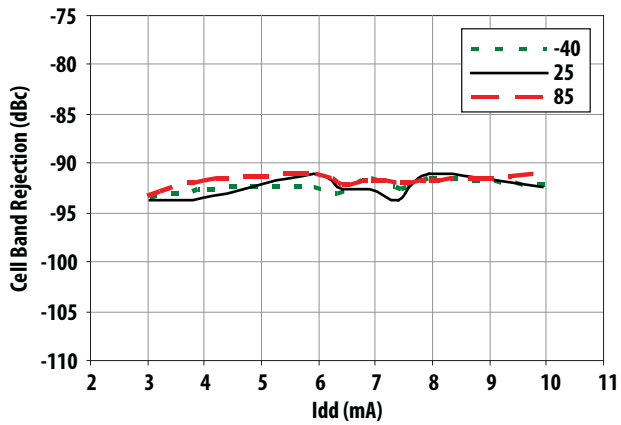


Figure 17. Cell band rejection vs. Idd at Vdd = 2.8V

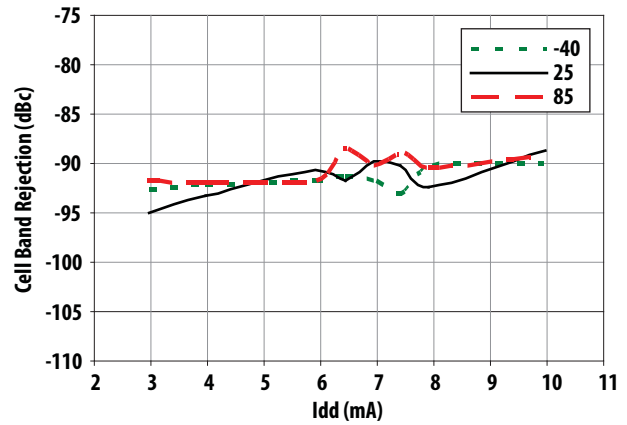


Figure 18. Cell band rejection vs. Idd at Vdd = 1.8V

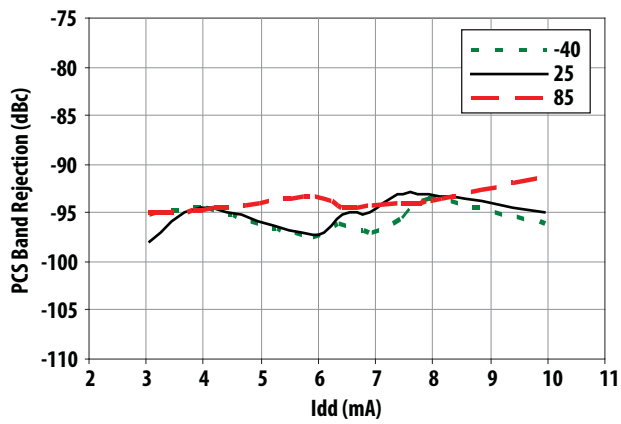


Figure 19. PCS band rejection vs. Idd at Vdd = 2.8V

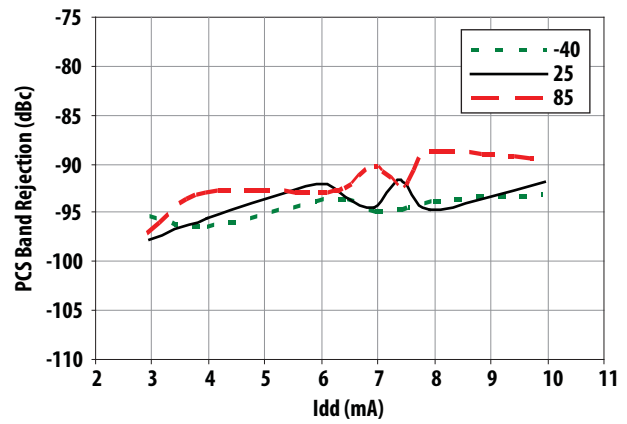


Figure 20. PCS band rejection vs. Idd at Vdd = 1.8V

ALM-1812 Typical Performance Curves at 25°C, R2 = 3.9kOhm (cont'd)

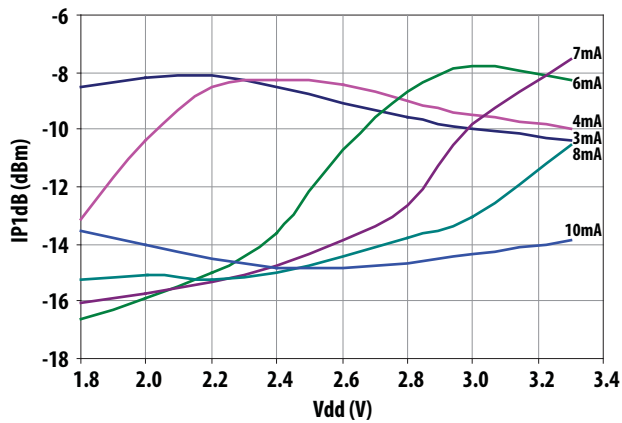


Figure 21. IP1dB vs. Vdd at 25°C

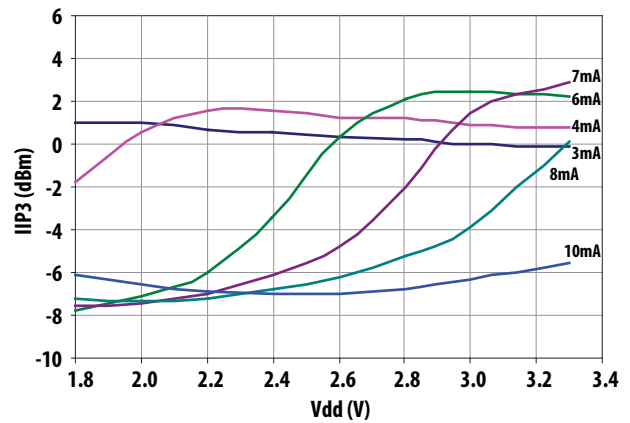


Figure 22. IIP3 vs. Vdd at 25°C

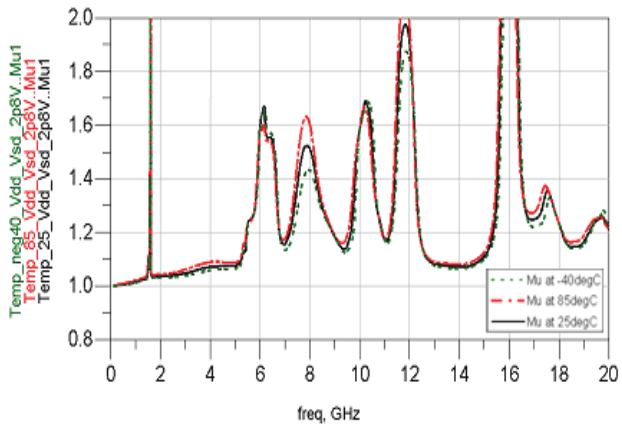


Figure 23. Edwards-Sinsky Output Stability Factor (Mu) at Vdd = 2.8V

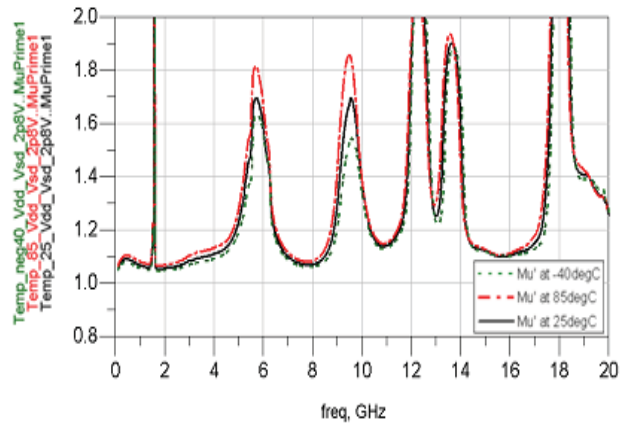


Figure 24. Edwards-Sinsky Input Stability Factor (Mu') at Vdd = 2.8V

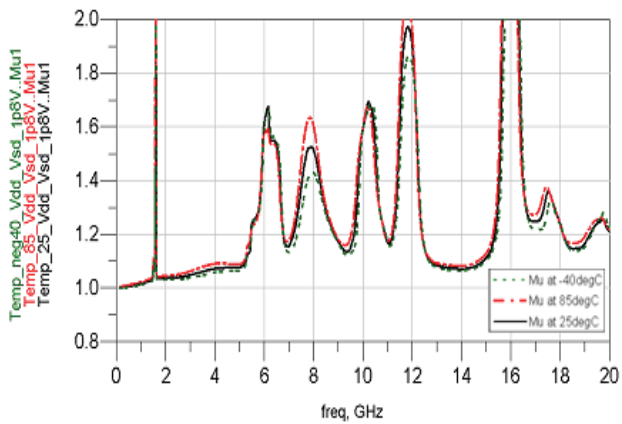


Figure 25. Edwards-Sinsky Output Stability Factor (Mu) at Vdd = 1.8V

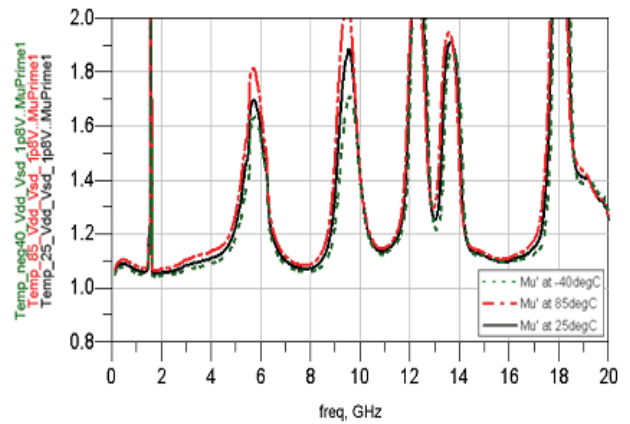


Figure 26. Edwards-Sinsky Input Stability Factor (Mu) at Vdd = 1.8V

ALM-1812 Scattering Parameter and Measurement Reference Planes

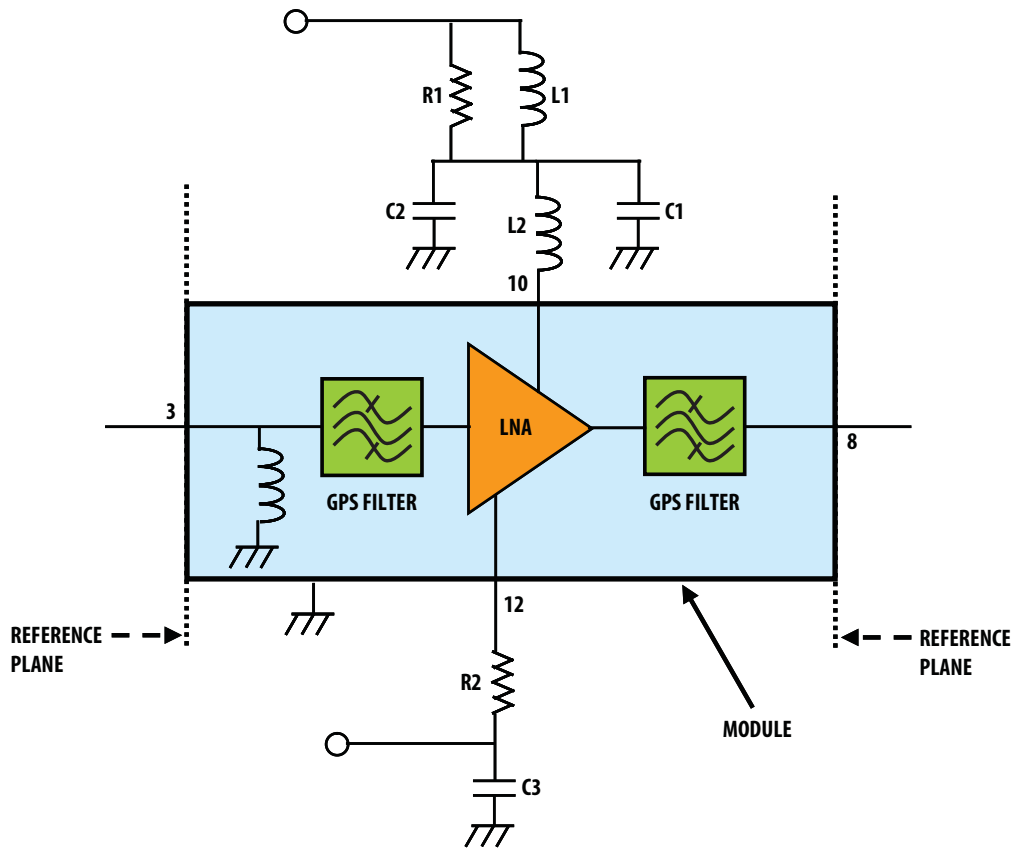


Figure 27. Scattering parameter measurement reference planes

ALM-1812 Typical Scattering Parameters at 25°C, Vdd = 2.8V, Idd = 6.8mA

The S- and Noise Parameters are measured using a coplanar waveguide PCB with 10 mils Rogers® RO4350. Figure 27 shows the input and output reference planes. The circuit values are as indicated in Figure 6.

| Freq (GHz) | S11 | S11 | S21 | S21 | S12 | S12 | S22 | S22 |
|---------------|-----------|---------|-----------|---------|-----------|---------|-----------|---------|
| | Mag. (dB) | Ang. | Mag. (dB) | Ang. | Mag. (dB) | Ang. | Mag. (dB) | Ang. |
| 0.05 | -0.36 | 167.90 | -70.91 | 179.43 | -72.41 | -33.51 | -0.02 | -1.13 |
| 0.1 | -0.48 | 157.43 | -73.83 | 90.22 | -72.95 | -44.37 | -0.02 | -2.30 |
| 0.2 | -0.61 | 137.05 | -75.70 | -98.13 | -76.85 | 143.01 | -0.03 | -4.72 |
| 0.3 | -0.59 | 118.80 | -79.52 | 144.78 | -78.22 | 18.52 | -0.03 | -7.15 |
| 0.4 | -0.56 | 102.02 | -80.81 | -93.44 | -80.94 | -96.45 | -0.05 | -9.58 |
| 0.5 | -0.54 | 86.73 | -80.23 | 173.99 | -81.68 | 49.58 | -0.07 | -12.00 |
| 0.6 | -0.51 | 72.90 | -84.40 | -139.64 | -83.85 | -22.49 | -0.08 | -14.49 |
| 0.7 | -0.48 | 60.09 | -80.13 | 31.21 | -84.39 | 104.85 | -0.10 | -17.07 |
| 0.8 | -0.47 | 48.25 | -77.24 | 19.91 | -82.49 | 140.19 | -0.13 | -19.77 |
| 0.8275 | -0.46 | 45.13 | -76.66 | -1.05 | -81.84 | -26.77 | -0.13 | -20.53 |
| 0.9 | -0.45 | 37.19 | -74.69 | -9.12 | -80.63 | 159.19 | -0.15 | -22.57 |
| 1.0 | -0.44 | 26.19 | -72.60 | -22.11 | -83.78 | 49.06 | -0.17 | -25.01 |
| 1.1 | -0.44 | 15.97 | -71.50 | -42.85 | -83.42 | 164.49 | -0.20 | -27.52 |
| 1.2 | -0.46 | 6.12 | -71.18 | -53.20 | -84.42 | -64.80 | -0.23 | -31.01 |
| 1.3 | -0.51 | -4.06 | -70.88 | -56.47 | -84.53 | 28.25 | -0.26 | -34.89 |
| 1.4 | -0.60 | -16.54 | -77.69 | -86.33 | -78.22 | -127.64 | -0.30 | -40.11 |
| 1.5 | -2.15 | -39.74 | -52.92 | 178.08 | -71.88 | -163.04 | -1.14 | -49.93 |
| 1.575 | -12.00 | -162.25 | 18.44 | 157.76 | -30.80 | 116.58 | -7.66 | 49.43 |
| 1.6 | -0.95 | 56.36 | -4.42 | -5.83 | -53.21 | -47.84 | -1.14 | 4.99 |
| 1.7 | -0.51 | -13.71 | -77.00 | -145.33 | -80.55 | -115.70 | -0.32 | -35.94 |
| 1.8 | -0.57 | -27.70 | -76.26 | -121.44 | -78.53 | -131.67 | -0.33 | -42.70 |
| 1.885 | -0.60 | -36.23 | -84.37 | 147.81 | -71.90 | -132.40 | -0.34 | -46.60 |
| 1.9 | -0.61 | -37.61 | -77.77 | 96.20 | -72.22 | -128.72 | -0.34 | -47.22 |
| 2.0 | -0.66 | -46.35 | -62.56 | 48.44 | -70.83 | -128.36 | -0.35 | -51.19 |
| 2.1 | -0.70 | -54.49 | -52.67 | 3.05 | -67.29 | -138.82 | -0.35 | -54.92 |
| 2.2 | -0.70 | -62.05 | -49.53 | -43.62 | -64.95 | -149.31 | -0.36 | -58.43 |
| 2.3 | -0.69 | -69.58 | -49.33 | -75.23 | -63.28 | -150.12 | -0.36 | -61.85 |
| 2.4 | -0.69 | -76.98 | -49.47 | -93.88 | -62.60 | -160.56 | -0.36 | -65.19 |
| 2.5 | -0.69 | -84.41 | -49.34 | -107.39 | -61.30 | -165.14 | -0.37 | -68.55 |
| 3.0 | -0.71 | -118.39 | -48.63 | -151.44 | -56.60 | 176.28 | -0.37 | -83.99 |
| 3.5 | -0.69 | -150.17 | -48.84 | 171.67 | -53.14 | 154.09 | -0.36 | -98.92 |
| 4.0 | -0.83 | 176.10 | -54.58 | 125.18 | -50.85 | 127.76 | -0.41 | -115.73 |
| 4.5 | -1.07 | 145.32 | -52.45 | -42.92 | -51.74 | 108.49 | -0.49 | -131.29 |
| 5.0 | -1.37 | 108.52 | -36.63 | -103.59 | -57.19 | 116.36 | -0.71 | -153.16 |
| 6.0 | -3.36 | 39.77 | -24.42 | 135.12 | -42.94 | 124.29 | -7.89 | 89.52 |
| 7.0 | -1.25 | -20.47 | -39.38 | -6.98 | -53.09 | 139.34 | -0.95 | 178.08 |
| 8.0 | -1.50 | -73.87 | -32.30 | 82.78 | -40.36 | 141.29 | -0.96 | 135.38 |
| 9.0 | -1.57 | -129.61 | -30.13 | 163.08 | -27.18 | 86.19 | -1.65 | 118.05 |
| 10.0 | -2.49 | -178.13 | -22.11 | 54.31 | -22.22 | 41.54 | -2.73 | 71.53 |
| 11.0 | -4.03 | 132.11 | -18.89 | -75.98 | -20.13 | -111.40 | -3.60 | 82.03 |
| 12.0 | -4.63 | 63.14 | -29.16 | -95.52 | -35.45 | -70.23 | -2.13 | 53.32 |
| 13.0 | -4.96 | -64.89 | -24.87 | -131.78 | -28.36 | -120.38 | -1.60 | 27.95 |
| 14.0 | -3.23 | -143.72 | -24.81 | 158.49 | -28.55 | 171.46 | -2.11 | -5.53 |
| 15.0 | -3.78 | 131.84 | -28.69 | 146.44 | -29.29 | 160.75 | -2.96 | -34.59 |
| 16.0 | -5.51 | 49.69 | -21.18 | 55.22 | -23.10 | 62.73 | -4.57 | -100.39 |
| 17.0 | -10.35 | 174.02 | -24.73 | -68.32 | -27.84 | -66.54 | -4.47 | 107.18 |
| 18.0 | -4.30 | 89.47 | -26.34 | 99.23 | -26.72 | 92.85 | -2.37 | 28.83 |
| 19.0 | -5.60 | 49.69 | -24.29 | -38.15 | -25.85 | -43.76 | -4.27 | -29.69 |
| 20.0 | -3.34 | 1.63 | -21.00 | 178.45 | -21.72 | -176.08 | -8.70 | 114.20 |

ALM-1812 Typical Scattering Parameters at 25°C, Vdd = 1.8V, Idd = 4mA

| Freq (GHz) | S11 | | S21 | | S12 | | S22 | |
|---------------|--------|---------|--------|---------|--------|---------|-------|---------|
| | Mag. | Ang. | Mag. | Ang. | Mag. | Ang. | Mag. | Ang. |
| 0.05 | -0.37 | 167.91 | -70.39 | -97.32 | -69.97 | -112.11 | -0.02 | -1.20 |
| 0.1 | -0.49 | 157.48 | -69.16 | -138.73 | -72.30 | 169.58 | -0.02 | -2.34 |
| 0.2 | -0.62 | 137.11 | -76.73 | 63.86 | -73.74 | -156.90 | -0.03 | -4.76 |
| 0.3 | -0.60 | 118.84 | -76.40 | 176.75 | -78.51 | 129.65 | -0.04 | -7.16 |
| 0.4 | -0.57 | 102.07 | -79.44 | 149.69 | -80.33 | -109.07 | -0.05 | -9.57 |
| 0.5 | -0.55 | 86.79 | -82.26 | -11.94 | -78.34 | -150.44 | -0.07 | -12.01 |
| 0.6 | -0.52 | 72.98 | -81.51 | 153.55 | -82.35 | -45.85 | -0.09 | -14.48 |
| 0.7 | -0.49 | 60.16 | -82.42 | 40.14 | -85.39 | 163.19 | -0.11 | -17.06 |
| 0.8 | -0.47 | 48.32 | -81.13 | 4.95 | -80.01 | 130.58 | -0.13 | -19.74 |
| 0.8275 | -0.46 | 45.21 | -80.98 | 20.28 | -81.98 | 114.35 | -0.14 | -20.51 |
| 0.9 | -0.46 | 37.27 | -77.14 | -3.31 | -79.31 | 87.20 | -0.15 | -22.55 |
| 1.0 | -0.44 | 26.28 | -75.53 | -6.38 | -82.00 | 123.22 | -0.18 | -25.00 |
| 1.1 | -0.44 | 16.08 | -74.01 | -31.95 | -81.92 | -13.35 | -0.20 | -27.48 |
| 1.2 | -0.47 | 6.22 | -75.82 | -51.00 | -86.49 | -162.55 | -0.23 | -30.95 |
| 1.3 | -0.51 | -3.92 | -74.62 | -52.43 | -82.08 | -66.69 | -0.26 | -34.83 |
| 1.4 | -0.60 | -16.42 | -78.94 | -94.19 | -78.84 | -121.08 | -0.31 | -40.01 |
| 1.5 | -2.07 | -39.34 | -54.42 | 173.14 | -70.76 | -152.73 | -1.07 | -49.72 |
| 1.575 | -11.07 | -146.67 | 16.10 | 157.09 | -29.37 | 109.49 | -6.41 | 52.69 |
| 1.6 | -1.03 | 57.61 | -6.09 | -3.46 | -51.01 | -52.59 | -1.20 | 4.51 |
| 1.7 | -0.52 | -13.37 | -75.43 | -141.27 | -80.16 | -92.38 | -0.32 | -35.70 |
| 1.8 | -0.57 | -27.52 | -77.68 | -133.47 | -75.83 | -134.34 | -0.33 | -42.55 |
| 1.885 | -0.61 | -36.04 | -79.90 | -164.72 | -75.06 | -137.96 | -0.34 | -46.47 |
| 1.9 | -0.62 | -37.42 | -79.59 | 150.62 | -73.21 | -126.80 | -0.34 | -47.08 |
| 2.0 | -0.67 | -46.25 | -65.59 | 57.67 | -70.33 | -133.91 | -0.35 | -51.03 |
| 2.1 | -0.72 | -54.30 | -54.83 | 2.11 | -67.29 | -132.12 | -0.36 | -54.76 |
| 2.2 | -0.71 | -61.83 | -51.92 | -51.69 | -64.81 | -146.54 | -0.36 | -58.27 |
| 2.3 | -0.70 | -69.36 | -52.25 | -82.45 | -63.37 | -150.82 | -0.37 | -61.70 |
| 2.4 | -0.70 | -76.80 | -52.26 | -99.40 | -62.01 | -157.87 | -0.37 | -65.02 |
| 2.5 | -0.70 | -84.22 | -51.91 | -111.81 | -61.19 | -162.45 | -0.37 | -68.40 |
| 3.0 | -0.72 | -118.09 | -50.59 | -154.73 | -56.43 | 176.99 | -0.38 | -83.94 |
| 3.5 | -0.69 | -149.84 | -49.90 | 169.50 | -53.05 | 153.40 | -0.36 | -98.87 |
| 4.0 | -0.84 | 175.62 | -53.88 | 123.13 | -50.94 | 127.37 | -0.41 | -115.93 |
| 4.5 | -1.08 | 145.43 | -54.39 | -10.94 | -51.69 | 108.35 | -0.49 | -131.23 |
| 5.0 | -1.37 | 108.81 | -39.20 | -100.13 | -56.65 | 120.15 | -0.73 | -153.35 |
| 6.0 | -3.23 | 43.37 | -27.63 | 130.07 | -43.36 | 116.78 | -6.93 | 78.08 |
| 7.0 | -1.29 | -20.01 | -42.97 | -39.94 | -53.04 | 143.68 | -0.94 | 178.58 |
| 8.0 | -1.58 | -73.96 | -37.01 | 61.20 | -39.13 | 149.21 | -1.03 | 135.81 |
| 9.0 | -1.98 | -129.44 | -24.67 | 117.64 | -27.12 | 69.33 | -1.64 | 116.29 |
| 10.0 | -2.39 | -174.95 | -20.63 | 41.58 | -23.81 | 38.85 | -2.93 | 71.46 |
| 11.0 | -3.68 | 133.54 | -19.84 | -86.50 | -23.10 | -107.44 | -3.54 | 83.40 |
| 12.0 | -4.41 | 68.72 | -29.61 | -94.04 | -34.87 | -65.55 | -2.20 | 54.36 |
| 13.0 | -5.02 | -56.19 | -25.13 | -126.95 | -28.33 | -111.80 | -1.57 | 29.96 |
| 14.0 | -3.16 | -142.79 | -24.93 | 161.15 | -28.26 | 178.99 | -2.04 | -4.80 |
| 15.0 | -3.76 | 133.45 | -28.24 | 145.51 | -28.54 | 162.38 | -3.01 | -34.28 |
| 16.0 | -5.59 | 50.35 | -21.00 | 54.18 | -22.58 | 64.69 | -4.55 | -100.24 |
| 17.0 | -10.67 | 179.81 | -24.58 | -71.53 | -27.36 | -63.53 | -4.52 | 108.07 |
| 18.0 | -4.41 | 91.57 | -25.69 | 96.10 | -26.34 | 92.52 | -2.40 | 29.96 |
| 19.0 | -5.90 | 52.36 | -24.25 | -42.63 | -25.64 | -45.43 | -4.30 | -28.21 |
| 20.0 | -3.26 | 4.18 | -21.63 | 177.14 | -22.08 | -177.16 | -8.61 | 114.98 |

ALM-1812 Typical Noise Parameters at 25°C, Freq = 1.575 GHz, Vdd = 2.8V, Idd = 6.8mA

| Freq (GHz) | Fmin (dB) | GAMMA OPT | | |
|------------|-----------|-----------|-----|-------|
| | | Mag | Ang | Rn/50 |
| 1.575 | 1.50 | 0.24 | -99 | 0.19 |


ALM-1812 Typical Noise Parameters at 25°C, Freq = 1.575 GHz, Vdd = 1.8V, Idd = 4mA

| Freq (GHz) | Fmin (dB) | GAMMA OPT | | |
|------------|-----------|-----------|-----|-------|
| | | Mag | Ang | Rn/50 |
| 1.575 | 1.52 | 0.24 | -99 | 0.19 |

Notes:

- The exceptional noise figure performance of the ALM-1812 is due to its highly optimized design. In this regard, the Fmin of the ALM-1812 shown above is locked down by the internal input pre-match. This allows the use of relatively inexpensive chip inductors for external matching.

Package Dimension

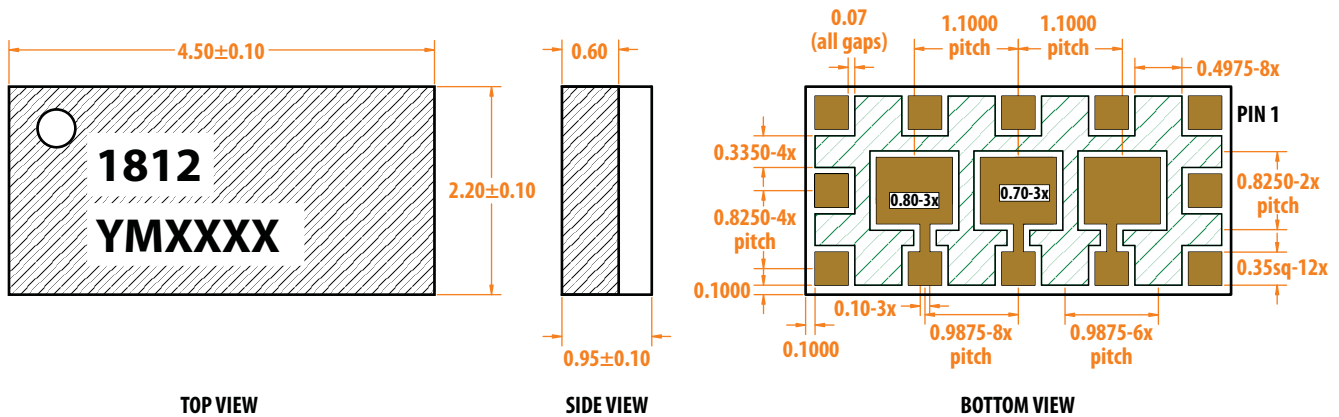



Part Number Ordering Information

| Part Number | Qty | Container |
|---------------|------|----------------|
| ALM-1812-BLKG | 100 | Antistatic Bag |
| ALM-1812-TR1G | 3000 | 13" Reel |

Note :


- All dimensions are in millimeters
- Dimensions are inclusive of plating
- Dimensions are exclusive of mold flash and metal burr.
- Y refer to year, M refer to month & XXXX refer to last 4 digit of lot number

PCB Land Patterns and Stencil Design

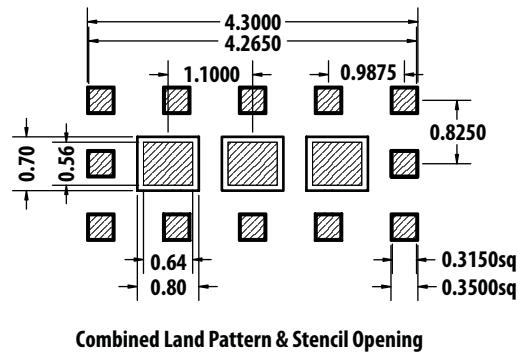
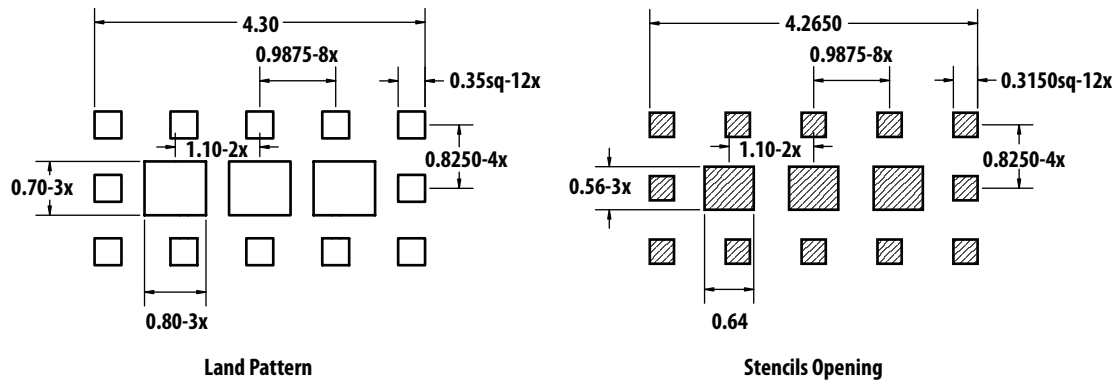


Dimensions are in mm


Device Orientation

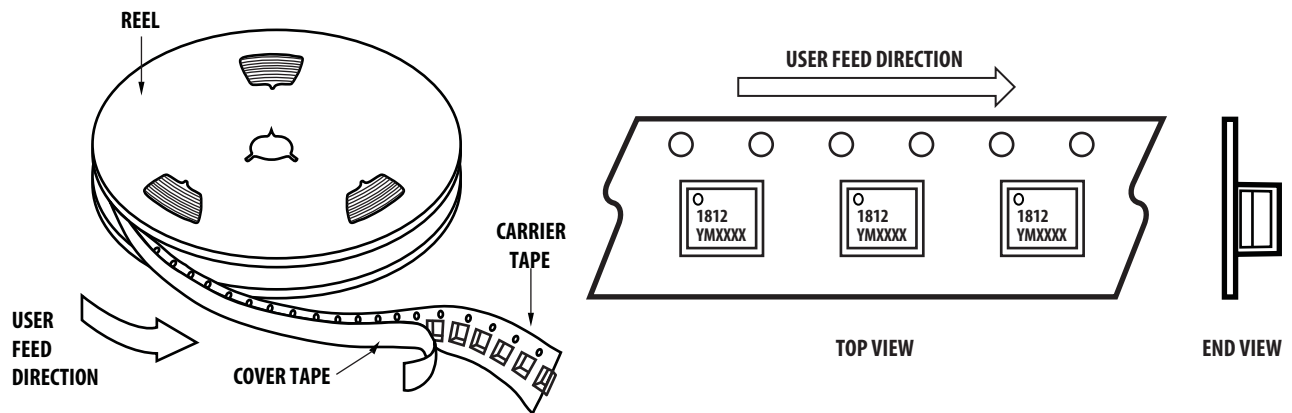

Tape Dimensions

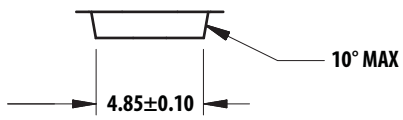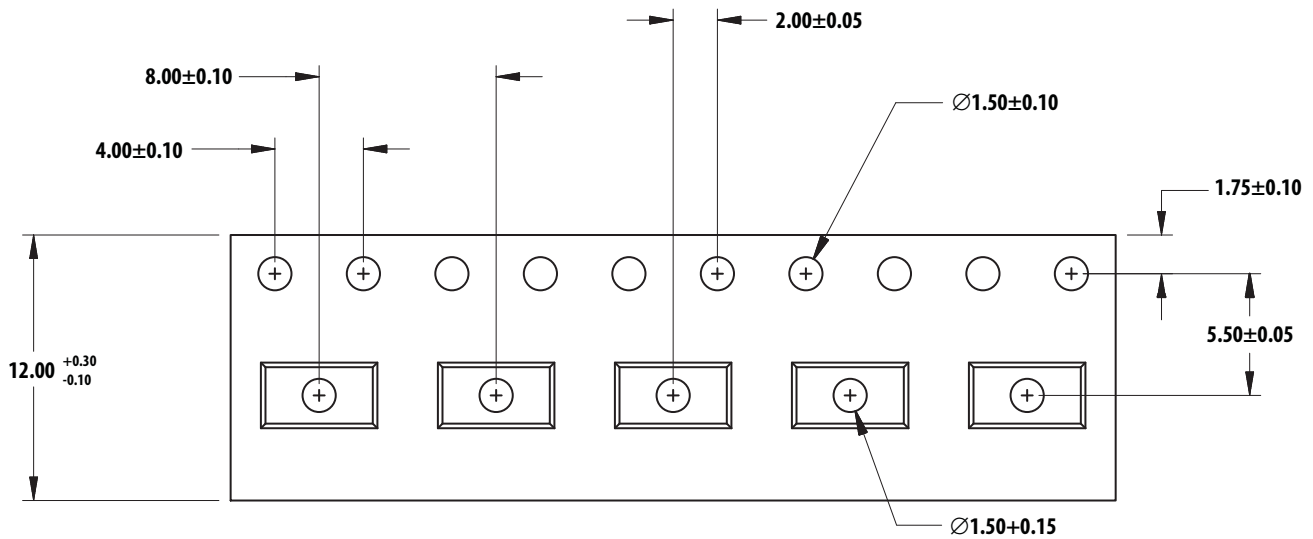

A.

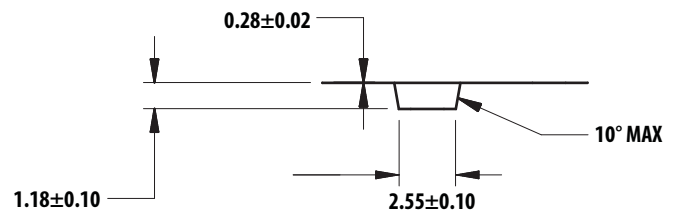


K.

B.

All dimensions are in millimeters.

Reel Dimensions (13" reel)

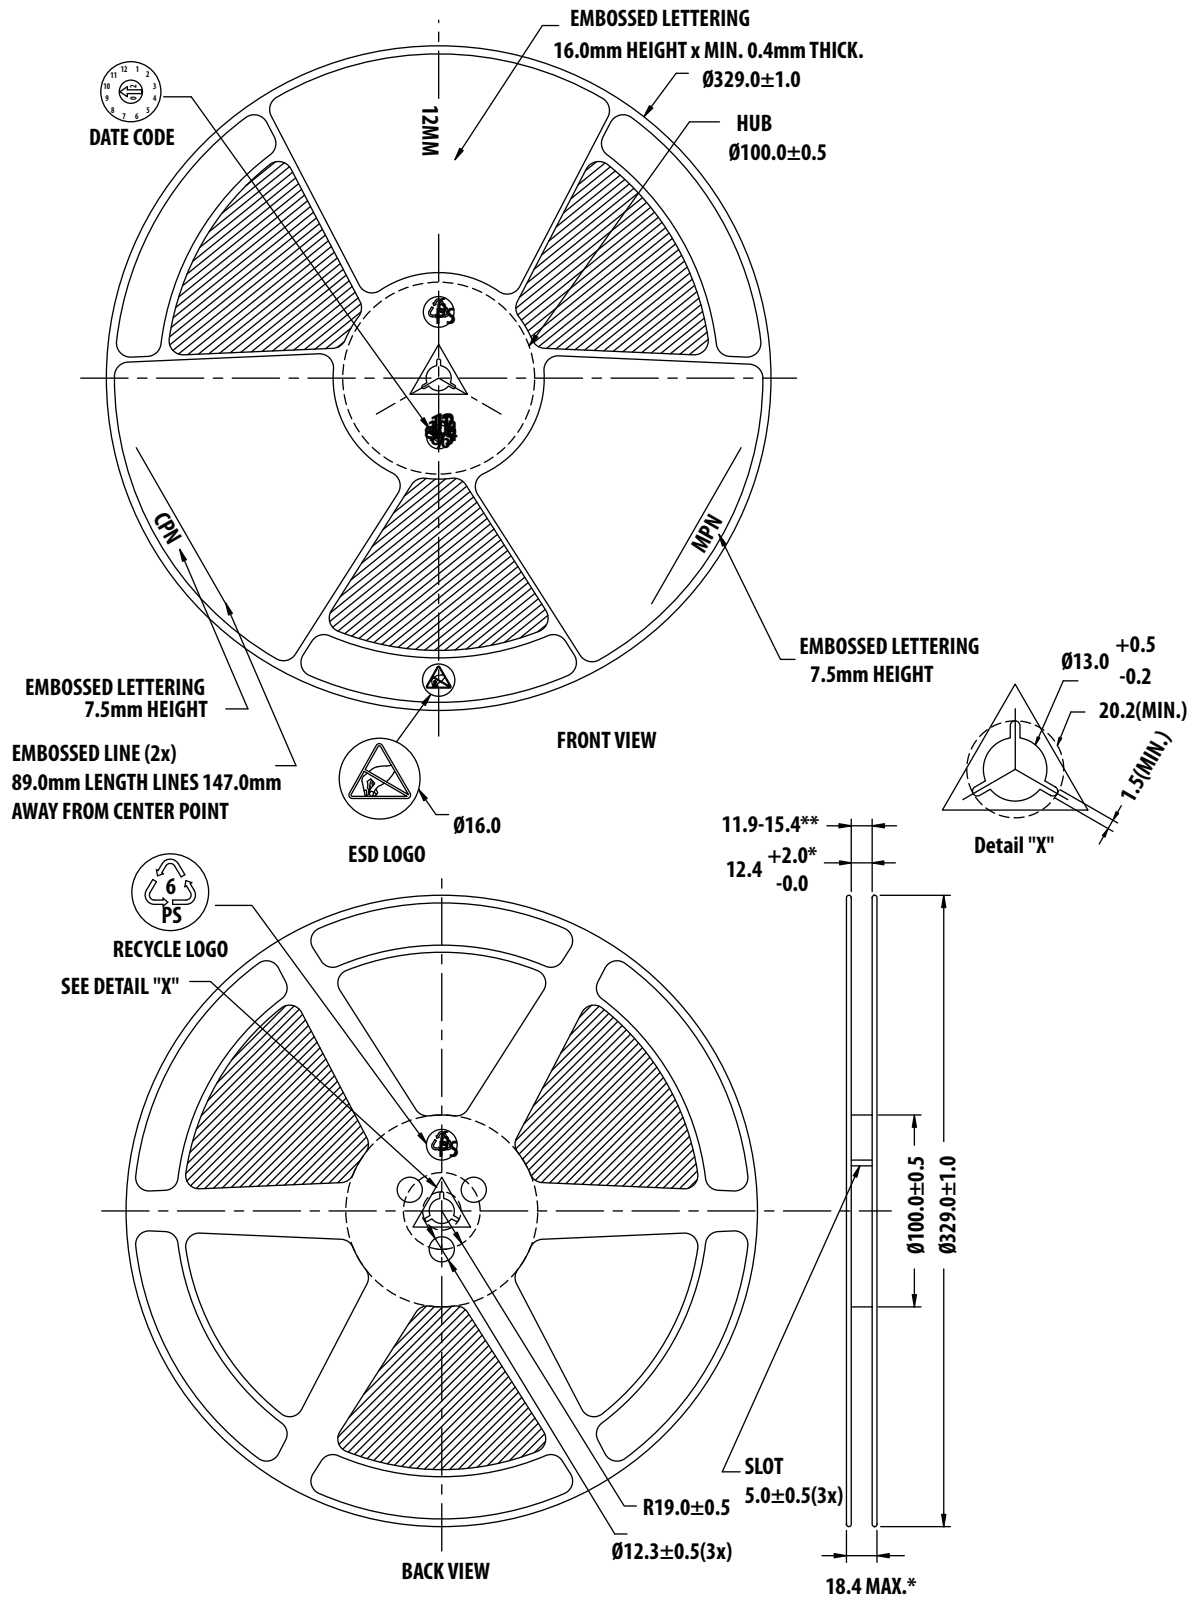

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2009 Avago Technologies. All rights reserved. AV02-2013EN - October 14, 2009

