


P/N S331AM-915

Alternative Connectors

- .SMA Reverse Polarity Plug(female)
P/N: S331AH-915
- .SMA Reverse Thread Plug(male)
P/N: S331AT-915

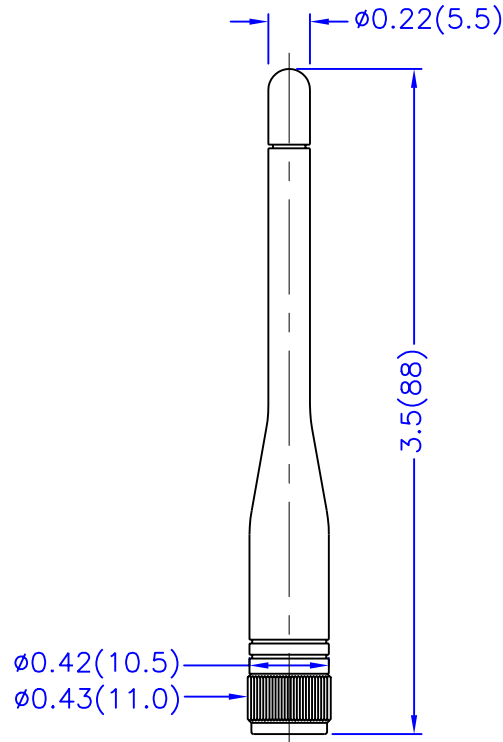

Electrical Properties:

Frequency Range: 902~928 MHz
 Impedance: 50Ω nominal
 VSWR: <2.0:1
 Gain: 1 dBi
 Radiation: Omni
 Polarization: Vertical
 Wave: 1/4 wave

Mechanical Properties:

Connector: SMA Plug
 Material: Polyurethane-BASF(Black)
 Whip: Brass with Chrome Plating(Black)
 Operation Temp.: -20°C to +65°C
 Storage Temp.: -30°C to +75°C

| | | | | |
|-----------|---------|--------------------------------------|------|--------|
| TOLERANCE | TITLE | 900MHz ISM Band Antenna-331 Model | DATE | SHEET |
| .X | | | | 1 OF 1 |
| .XX | UNIT | DWG. NO. S331AM-915 | | A4 |
| .XXX | in.(mm) | | | |
| ANGLE | SCALE | NEARSON | | |
| | 1 : 1 | | | |