


SPECIFICATION

Part No. : **MA.203.A.A301111.B301111**
Product Name : GPS/Penta-band Cellular Adhesive Antenna
Feature : High gain LNA up to 32dB
(GSM/CDMA/PCS/DCS/UMTS/GPRS/EDGE/ HSPA)
Height 10.8mm Diameter 55.1mm
RoHS Compliant



3D view

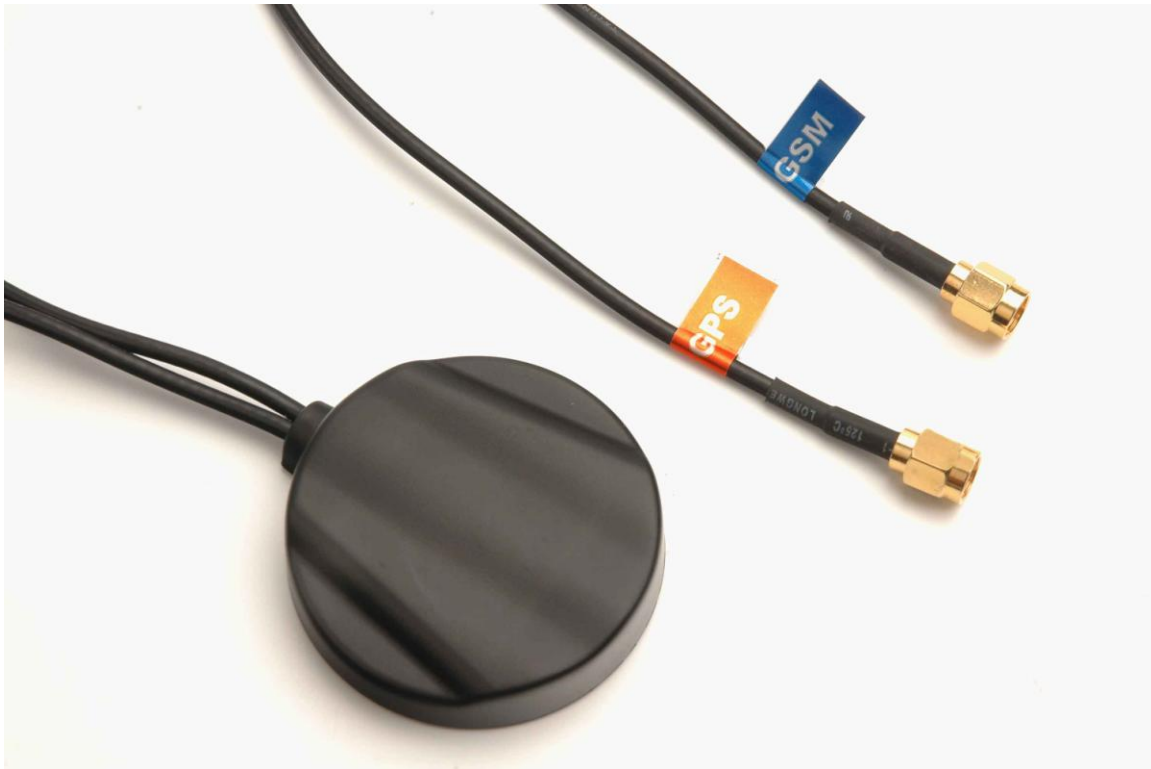

top view
(this side faces the sky)



underside view
(this side faces the passenger)

© All Rights Reserved

Taoglas Limited, Unit 7 Peare Campus, Moyne Business Park, Old Dublin Road, Enniscorthy, Co. Wexford, Ireland
www.taoglas.com

Introduction

This is a combination high performance GPS and Penta-band Cellular (GSM/CDMA/PCS/DCS/ / UMTS / GPRS / EDGE/ HSPA) antenna to simplify AVL or Fleet management antenna systems worldwide. Its high quality low profile covert housing can be attached onto the glass or even out of sight under the dashboard. This combination of a high gain GPS antenna and a leading edge penta band cellular antenna is ideal for those applications that require durability, small size and covert installation, and reliable reception and transmission crossing through different mobile networks.

Features

GPS

- High LNA Gain up to 32 dB
- Antenna Gain 30 ± 2 dB
- Miniaturized to 55.15x12mm
- Low Noise 1.5 dB max

Cellular

- Advanced penta-band cellular antenna (GSM/CDMA/PCS/DCS/UMTS/GPRS/EDGE/ HSPA)

Other

- Water Resistant IP 65 (IP 67 MA.203w version also available)
- Quality textured covert design. Low profile
- UV resistant ABS housing
- Comes with high grade 3M double sided tape for quick and easy mounting
- Optional cables and connectors

Specification

Performance Specifications		
Items	GPS Antenna	Cellular Antenna
Features	High performance GPS ceramic patch antenna with cutting edge low noise amplifier	800MHz to 2200MHz
Frequency	1575.42 MHz \pm 2MHz	As above
Gain	30 dB typ.	As patterns
	Gain at Zenith: 2.0 dBi min	
	Gain at 10° elevation : -4.0dBi min	
	Axial Ratio :2.0 dB max	
Noise Figure	1.5 dB max.	-
Polarization	RHCP	-
Out band Attenuation (LNA)	30dB min fo \pm 50MHz (fo=1575.42MHz)	-
Bandwidth	10 MHz min	-
VSWR	\leq 2.0	\leq 2.5
Impedance	50 Ω	50 Ω
Cable / Connector	Standard 1/2/3/5/10mRG-174 Cables and Connectors Fully Customizable	Standard 1/2/3/5/10mRG-174 Cables and Connectors Fully Customizable
Operating Temperature	-40°C ~ +85°C	-40°C ~ +85°C
Storage Temperature	-40°C ~ +95°C	-40°C ~ +95°C
Size	55mm * 10.8mm	
Housing	UV resistant ABS	


***note: specifications may be subject to change**

High Performance LNA (saw filter)

		2V	2.5V	3V	5V	6.5V
Saw Filter	Power Consumption	8mA	9mA	10mA	19mA	31mA
	Gain	30dB	31dB	32dB	35dB	36dB

Return Loss


With Housing, Glass Mount (RG-174, length=1M)

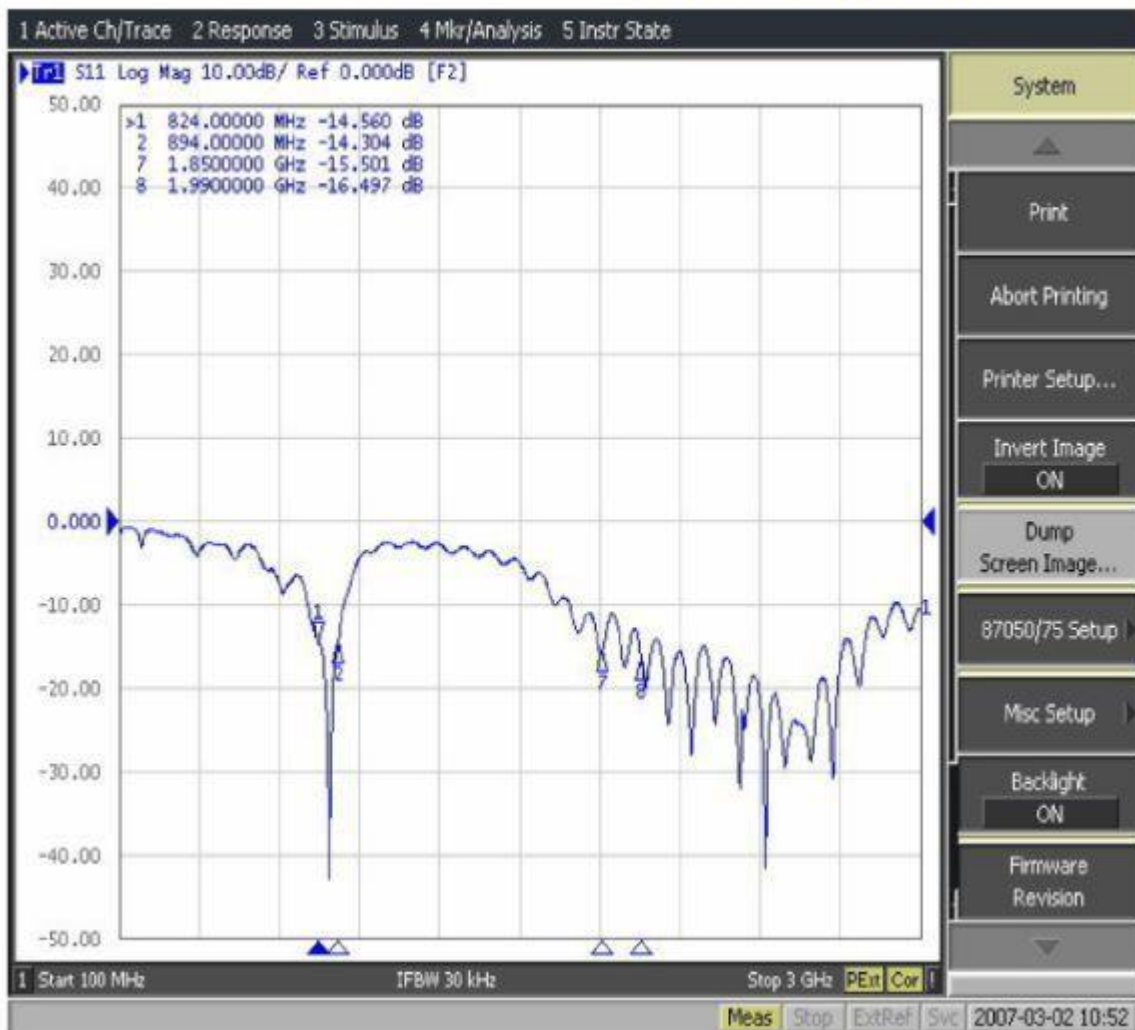

© All Rights Reserved

Taoglas Limited, Unit 7 Peare Campus, Moyne Business Park, Old Dublin Road, Enniscorthy, Co. Wexford, Ireland
www.taoglas.com

850 MHz

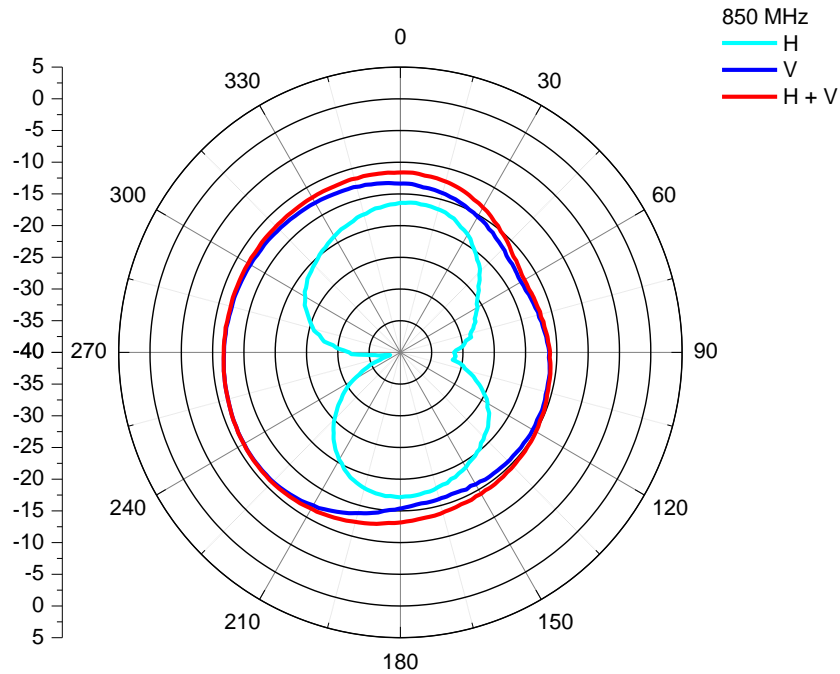


Center Frequency	850 MHz	Center Frequency	850 MHz
Horizontal (dBi) peak	-16.30	Horizontal (dBi)	-20.60
Vertical (dBi) peak	-11.10	Vertical (dBi) average	-13.68
Horiz.+Vert. (dBi) peak	-10.99	Horiz.+Vert. (dBi)	-12.88

© All Rights Reserved

Taoglas Limited, Unit 7 Peare Campus, Moyne Business Park, Old Dublin Road, Enniscorthy, Co. Wexford, Ireland
www.taoglas.com

900 MHz

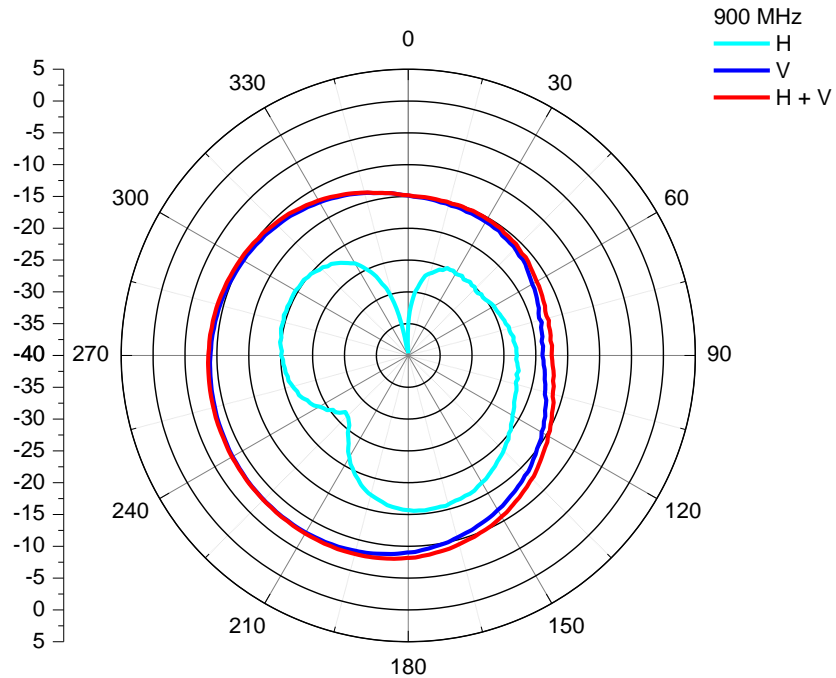


Center Frequency	900 MHz
Horizontal (dBi) peak	-15.51
Vertical (dBi) peak	-7.85
Horiz.+Vert. (dBi) peak	-7.61

Center Frequency	900 MHz
Horizontal (dBi) average	-20.63
Vertical (dBi) average	-11.23
Horiz.+Vert. (dBi) average	-10.75

© All Rights Reserved

Taoglas Limited, Unit 7 Peare Campus, Moyne Business Park, Old Dublin Road, Enniscorthy, Co. Wexford, Ireland
www.taoglas.com

1800 MHz

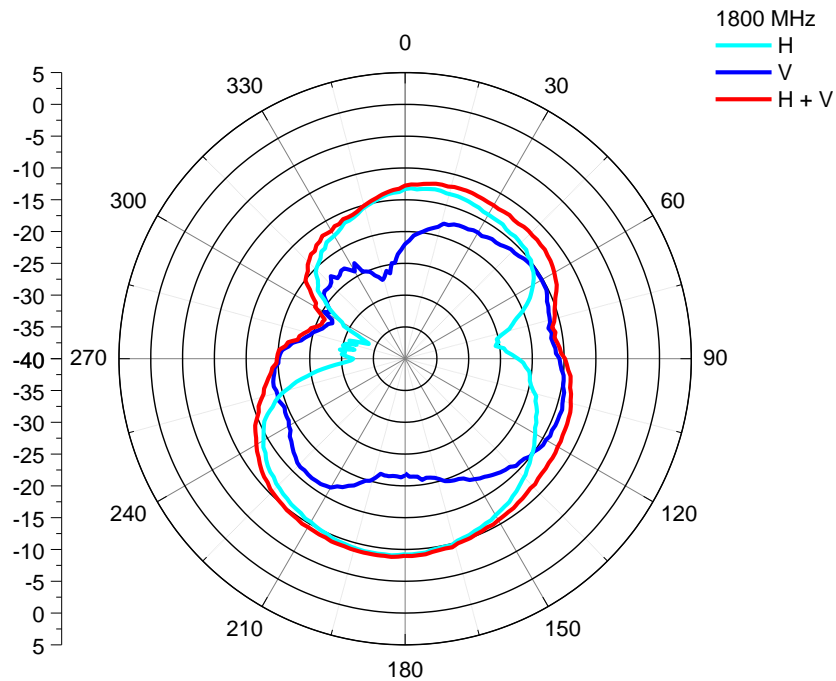


Center Frequency	1800 MHz	Center Frequency	1800 MHz
Horizontal (dBi) peak	-9.00	Horizontal (dBi) average	-13.95
Vertical (dBi) peak	-14.04	Vertical (dBi) average	-18.04
Horiz.+Vert. (dBi) peak	-8.76	Horiz.+Vert. (dBi)	-12.52

© All Rights Reserved

Taoglas Limited, Unit 7 Peare Campus, Moyne Business Park, Old Dublin Road, Enniscorthy, Co. Wexford, Ireland
www.taoglas.com

1900 MHz


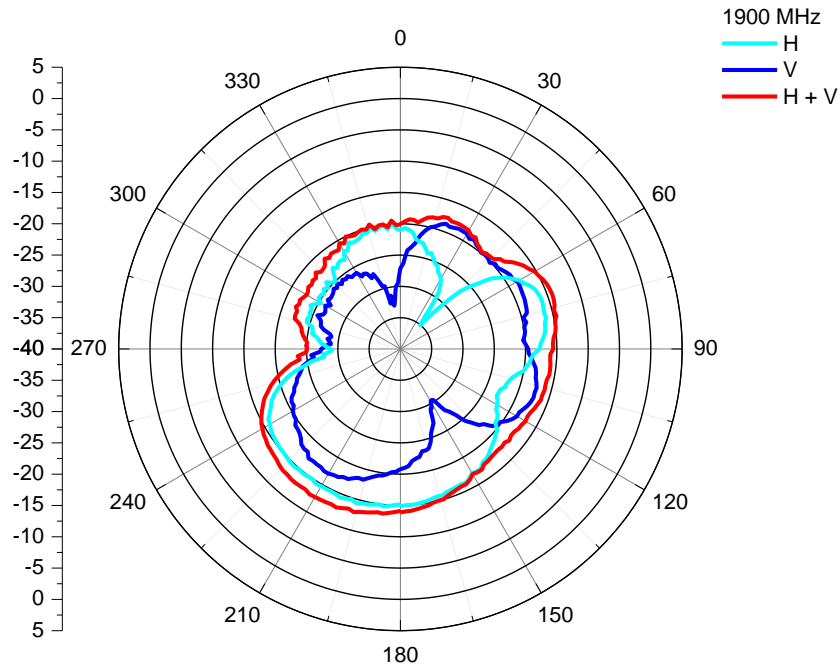


Center Frequency	1900 MHz	Center Frequency	1900 MHz
Horizontal (dBi) peak	-14.38	Horizontal (dBi) average	-18.49
Vertical (dBi) peak	-16.99	Vertical (dBi) average	-20.86
Horiz.+Vert. (dBi) peak	-14.38	Horiz.+Vert. (dBi)	-16.51



© All Rights Reserved

Taoglas Limited, Unit 7 Peare Campus, Moyne Business Park, Old Dublin Road, Enniscorthy, Co. Wexford, Ireland
www.taoglas.com

Drawings

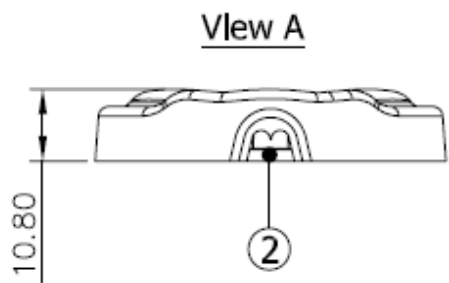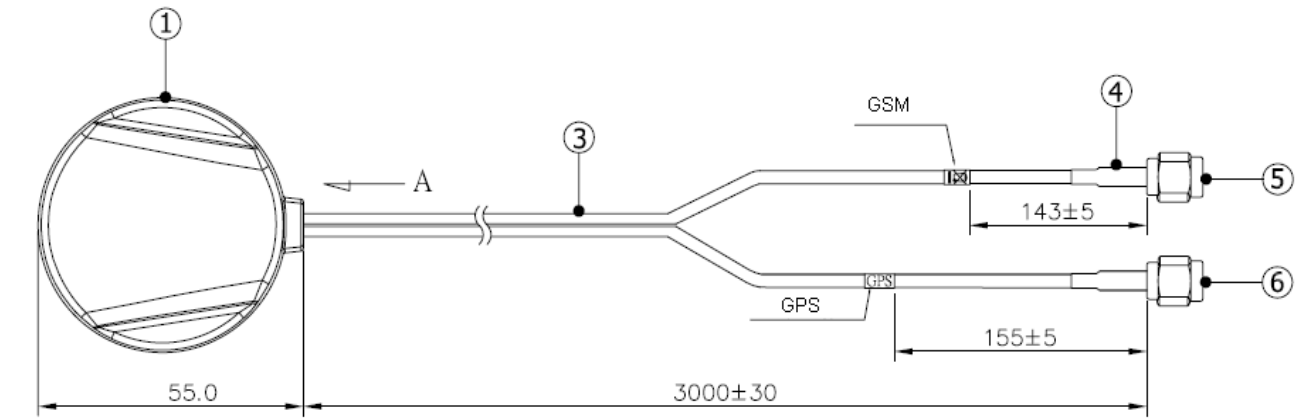

Bottom View

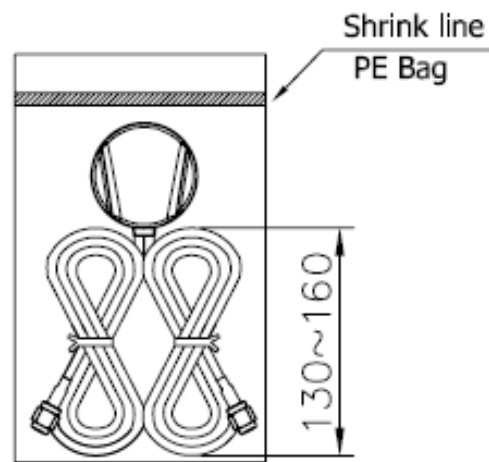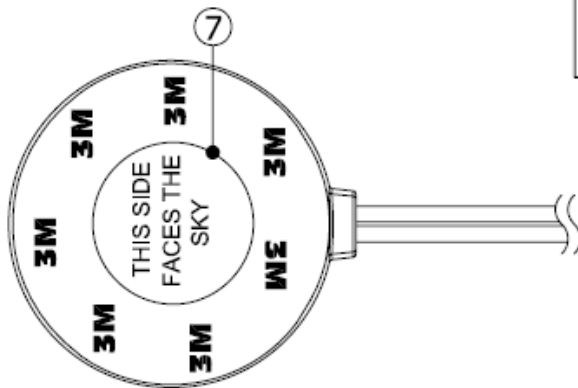

1	Antenna Cover	ABS; Color; Black
2	Cable Holder	ABS; Color; Black
3	Cable	RG-174 Black
4	Heat Shrink	Heat Shrink Tube
5	Connector: GSM	SMA(M)
6	Connector: GPS	SMA(M)
7	Label	Ø25mm

© All Rights Reserved

Taoglas Limited, Unit 7 Peare Campus, Moyne Business Park, Old Dublin Road, Enniscorthy, Co. Wexford, Ireland
www.taoglas.com