



Specification

SPECIFICATION

Part No.	:	AA.105.301111
Product Name	:	Titan GPS Antenna AA-105 3M RG174 GPS- SMA (M) Straight
Features	:	Magnetic Mount Covert stylish design Wide band input voltage Gain can be adjusted for your application (10dB~31dB) IP-67 Waterproof Custom designed antennas available upon request

Photos :



© All Rights Reserved

Taoglas Limited, Unit 7 Peare Campus, Moyne Business Park, Enniscorthy, Co. Wexford, Ireland
info@taoglas.com +353 53 9169500 www.taoglas.com



Specification

1.0 Electrical Specifications

Ceramic Patch Specification	
Outline Dimension	25*25*4mm
Ground Size	25*25*4mm
Center Frequency	1575.42±3MHz
Bandwidth	10MHz
VSWR	1.92 Max
Axial ratio	3dB Typ.
Gain @ Zenith	2dBi Typ.
Impedance	50Ω
Polarization	RHCP

LNA Specification	
Frequency	1575.42MHz
Impedance	50Ω
VSWR	1.92 Max.
Gain	30dB Typ.
Gain at Connector*	28.4dB
DC Power Input	2.7~5.5V
Noise Figure	1.5dB Typ.
Power Consumption	4.7mA @2.7V
	6mA @3.3V
	10.3mA @5V
Operating temp	-40°C ~ +85°C
Storage Temp	-40°C ~ +90°C

***Formula** = Patch Antenna Average Gain + LNA typical gain – RG174 cable loss @1.2dB per meter = Gain at connector

Gain at the Connector - Patch Gain 2dB + LNA Gain 30dB – Cable loss of 1.2dB per metre (@3m = 3.6dB) = 28.4dB approx.


© All Rights Reserved

Taoglas Limited, Unit 7 Peare Campus, Moyne Business Park, Enniscorthy, Co. Wexford, Ireland
info@taoglas.com +353 53 9169500 www.taoglas.com




Specification

2.0 Performance Measurement – Test Setup

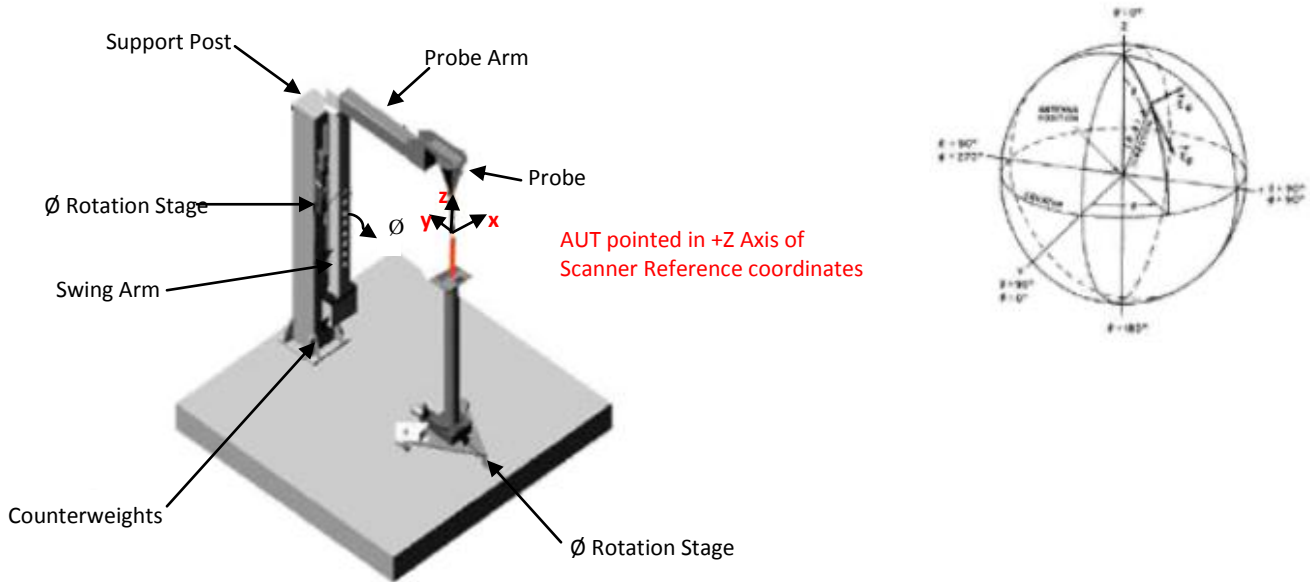

NFT-500S 3D Chamber Coordinate System Definition

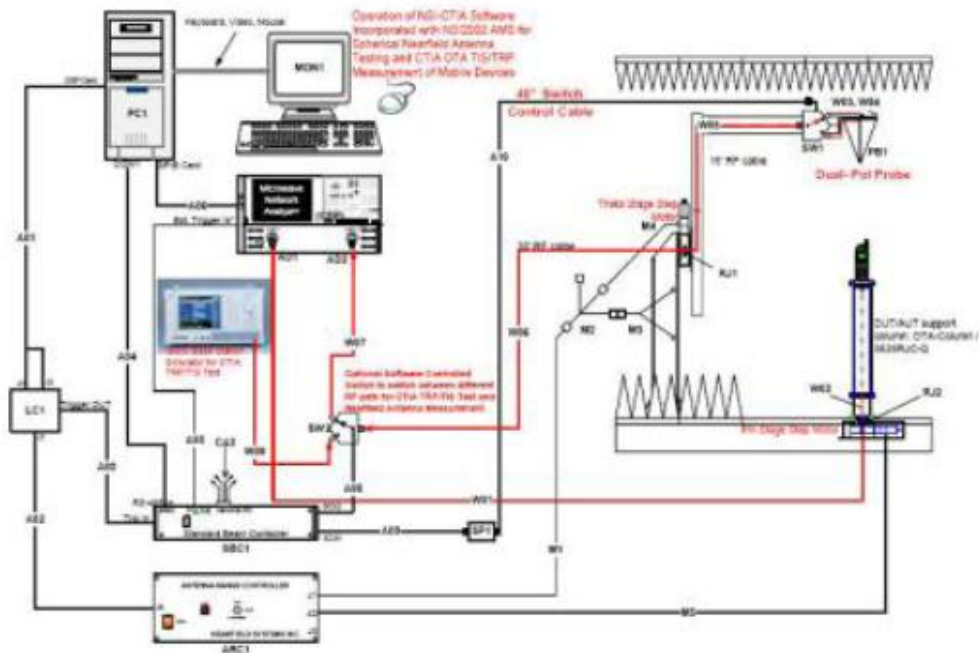

Configuration of NFT-500S 3D Chamber

© All Rights Reserved

Taoglas Limited, Unit 7 Peare Campus, Moyne Business Park, Enniscorthy, Co. Wexford, Ireland
 info@taoglas.com +353 53 9169500 www.taoglas.com




Specification



Agilent E5071B Network Analyzer



Anritsu 68147C Signal Generator

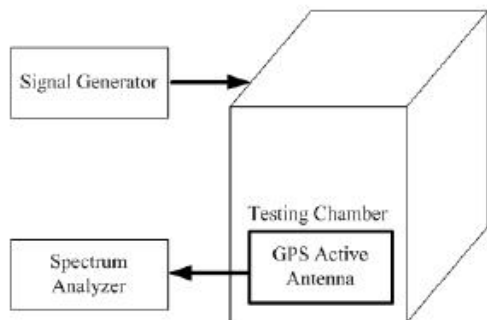

Testing Chamber






Anritsu MS2721A Spectrum



Specification


3.0 Ceramic Antenna S11 (with housing)

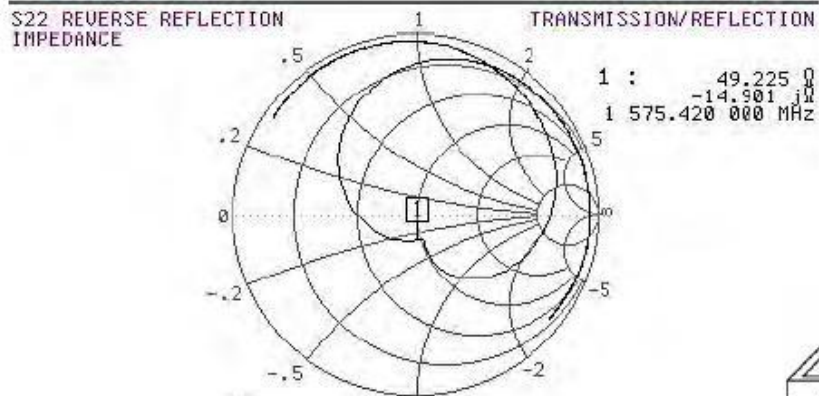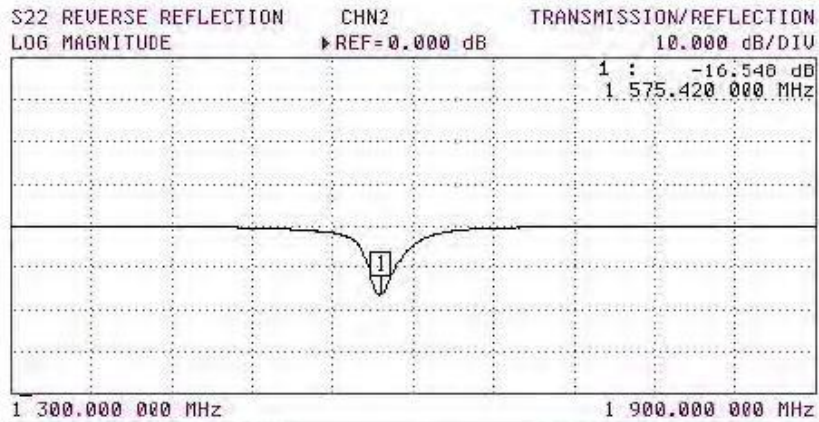



Specification

4.0 Ceramic Antenna Radiation Pattern (with housing)

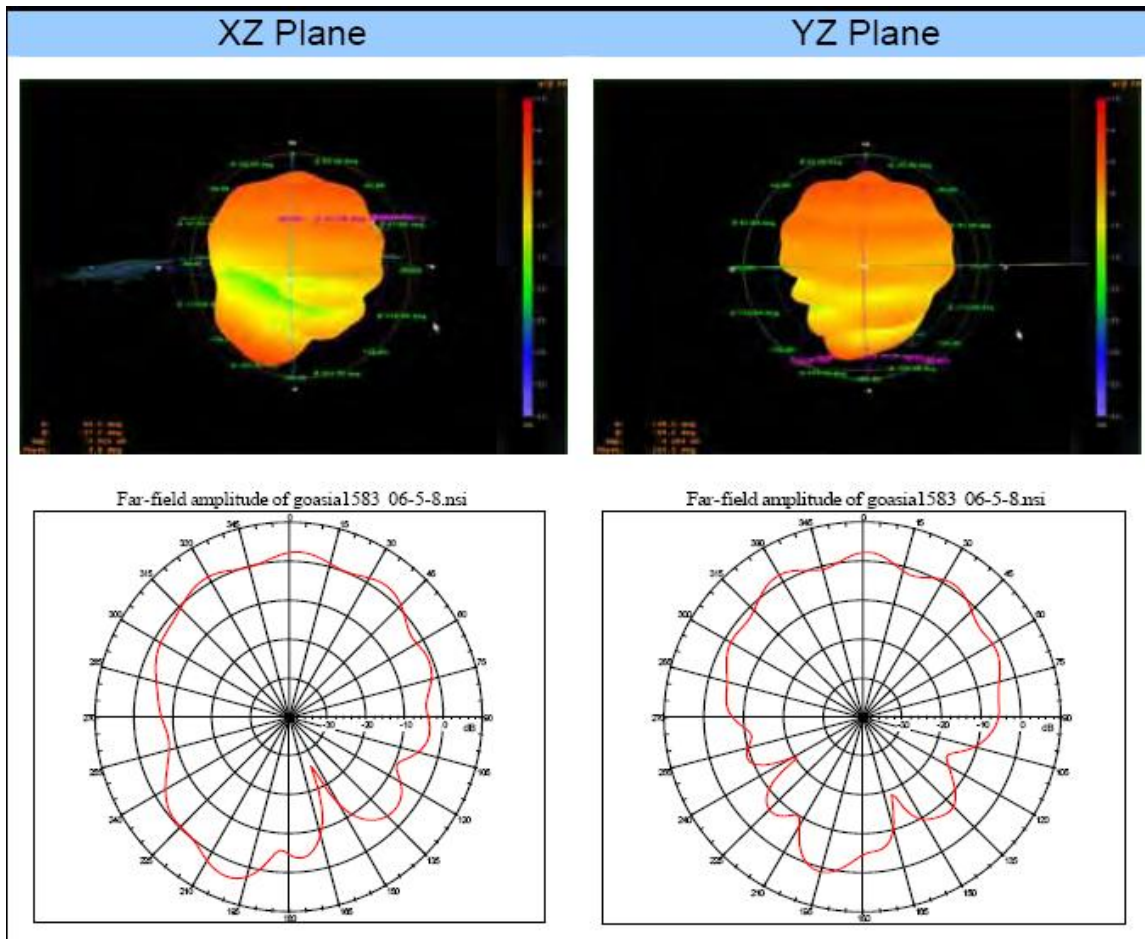

© All Rights Reserved

Taoglas Limited, Unit 7 Peare Campus, Moyne Business Park, Enniscorthy, Co. Wexford, Ireland
info@taoglas.com +353 53 9169500 www.taoglas.com



Specification

5.0 LNA gain



© All Rights Reserved

Taoglas Limited, Unit 7 Peare Campus, Moyne Business Park, Enniscorthy, Co. Wexford, Ireland
info@taoglas.com +353 53 9169500 www.taoglas.com



Specification

6.0 LNA S22




© All Rights Reserved

Taoglas Limited, Unit 7 Peare Campus, Moyne Business Park, Enniscorthy, Co. Wexford, Ireland
info@taoglas.com +353 53 9169500 www.taoglas.com



Specification

7.0 Drawing

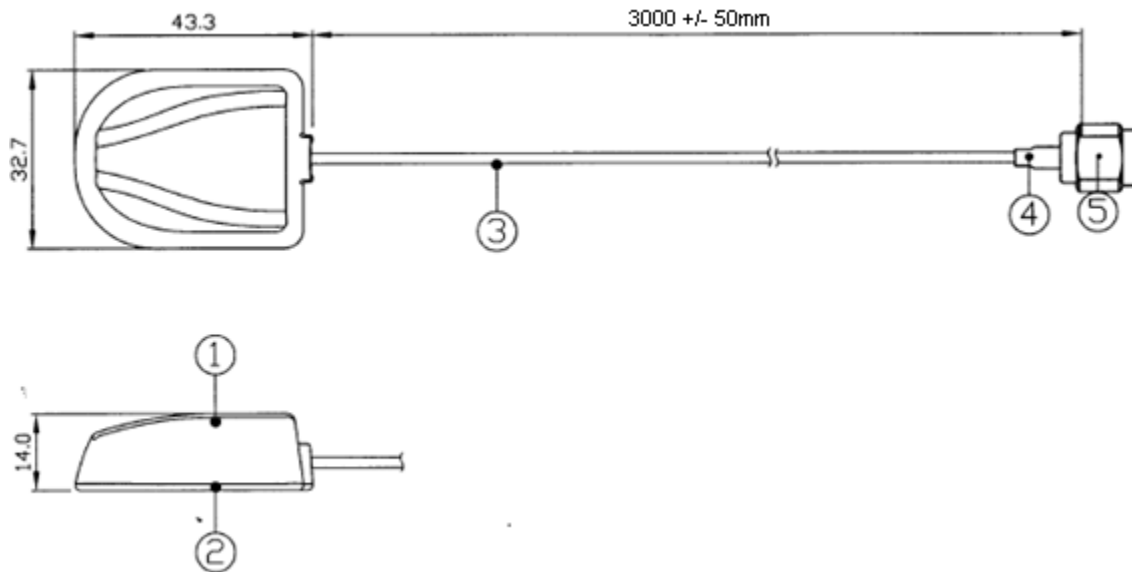

- 1. GPS Antenna top: PC; Colour:Black
- 2. GPS Antenna bottom: PC; Colour:Black
- 3. Cable: RG174
- 4. Tube: Heat shrink tube
- 5. Connector: SMA plug standard
- 6. Cable length and connector are fully customizable

RG-174 cable attenuation(dB/100mm)												
GHz	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5	5.5	6
RG-174	67	110	127	153	168	183	207	229	252	272	291	311