

719 MHz MediaFLO Ceramic Chip Antenna

Ground cleared under antenna, clearance area **10.60 x 10.25 mm**

Pulse Part Number: W3024



Features

- Omnidirectional radiation
- Low profile
- Compact size W x L x H (10 x 3.2 x 4 mm)
- Low weight (600 mg)
- Fully SMD compatible
- Lead free soldering compatible
- Tape and reel packing
- RoHS compliant

Applications

- MediaFlo Receivers
- 716–722 MHz

Engineering samples available Q3/2006

Electrical specifications @ +25 °C

Note: Electrical characteristics depend on test board (GP) size and antenna positioning on GP and Ground Clearance area size.

MediaFLO 716–722 MHz

Typical performance (test board size 100 x 37 mm, PWB ground clearance area 10.60 x 10.25 mm)

Frequency Range [MHz]	Linear Max Gain [dBi]	Efficiency [%] / [dB]	Return Loss min. [dB]	Impedance [Ω]	Operating Temperature [°C]
716 – 722	2 (peak) 1.5 (band edges)	75 / -1.25 (peak) 70 / -1.55 (band edges)	-8	50	-40 to +85

Pulse Antennas

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501
www.pulseeng.com/antennas





719 MHz MediaFLO Ceramic Chip Antenna

Ground cleared under antenna, clearance area **10.60 x 10.25 mm**



Typical Electrical Characteristics (T=25 °C)

Measured on 100 x 37 mm test board

Typical Return Loss S11/ impedance, measured on the test board

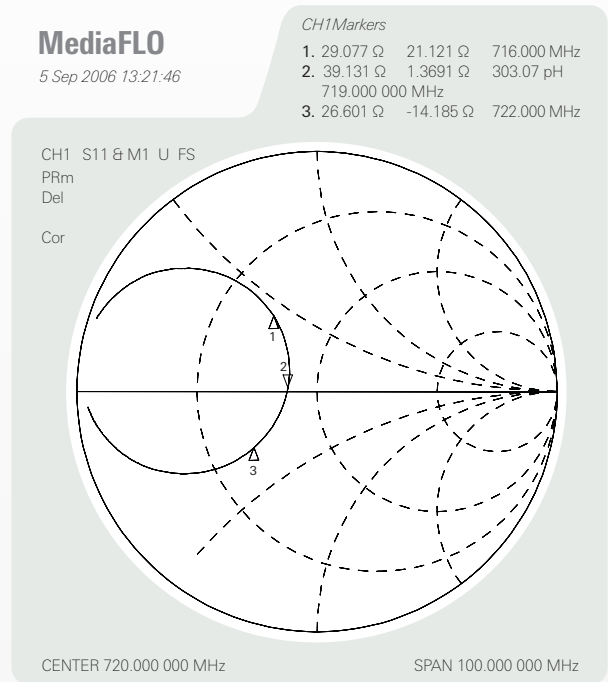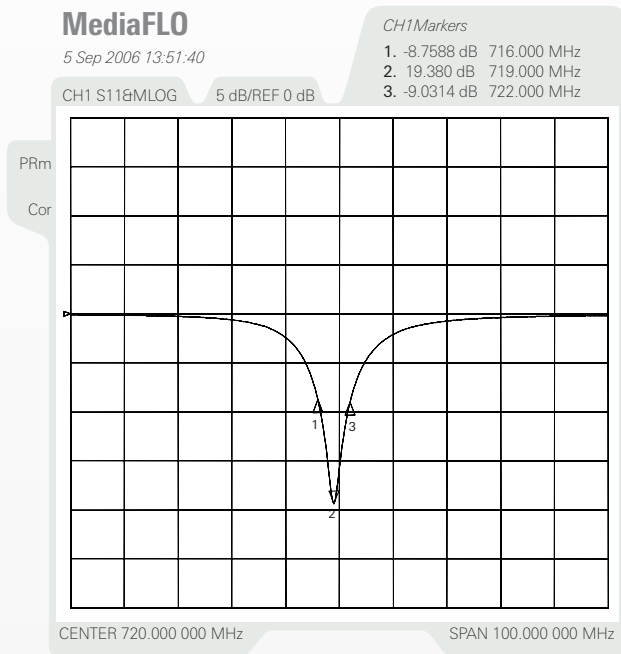

Free space efficiency and maximum gain

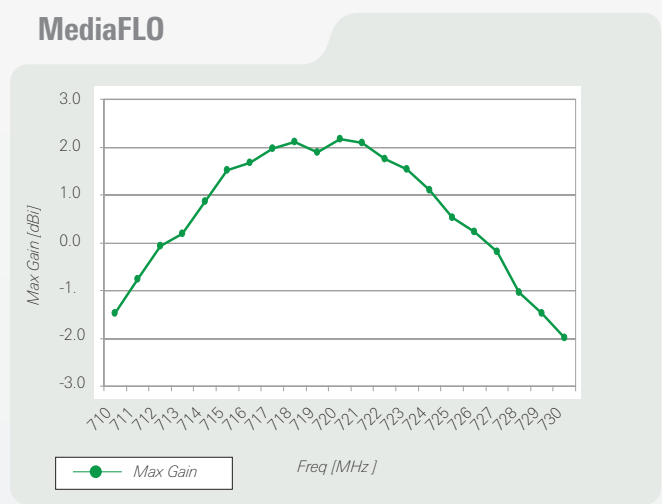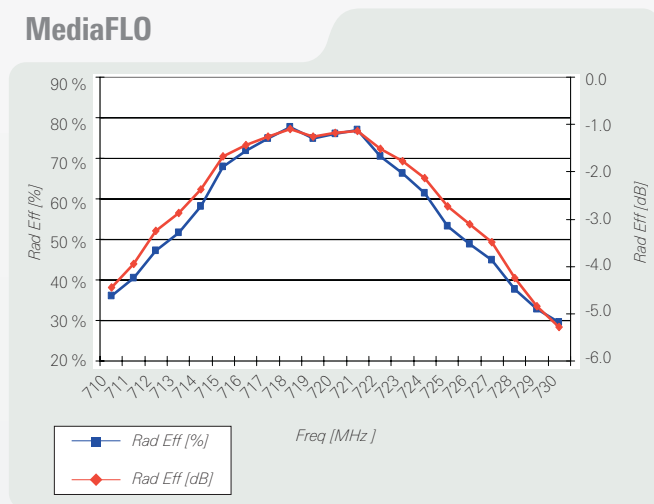

Pulse Antennas





Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501
www.pulseeng.com/antennas



719 MHz MediaFLO Ceramic Chip Antenna

Ground cleared under antenna, clearance area 10.60 mm x 10.25 mm.

Typical Free Space Radiation Patterns

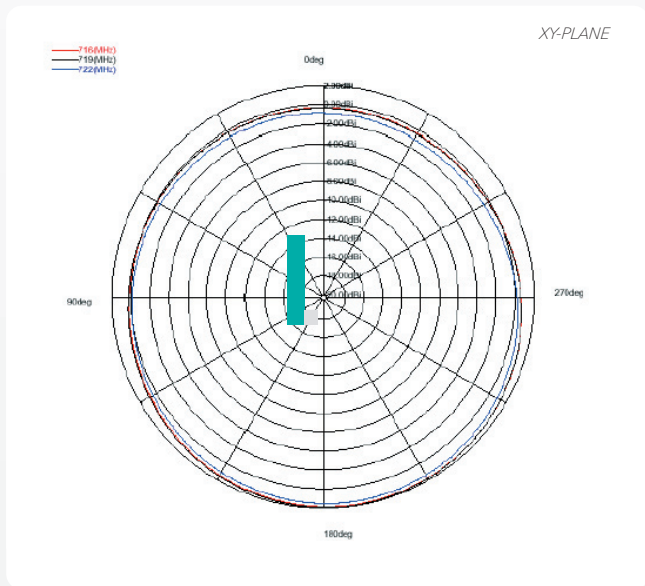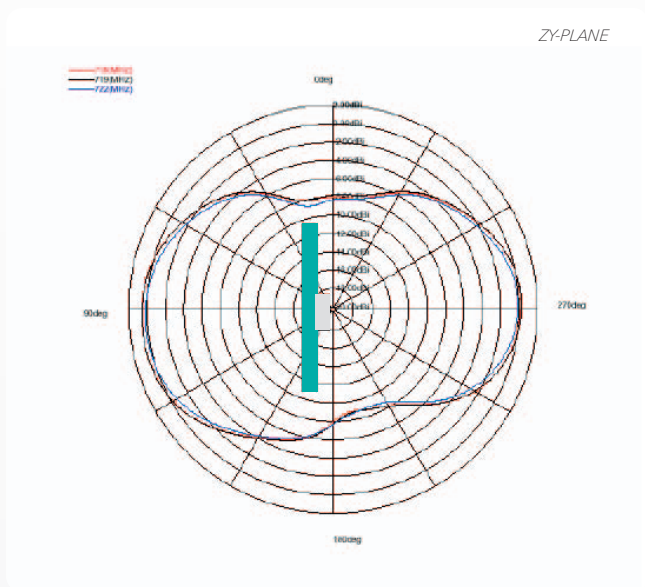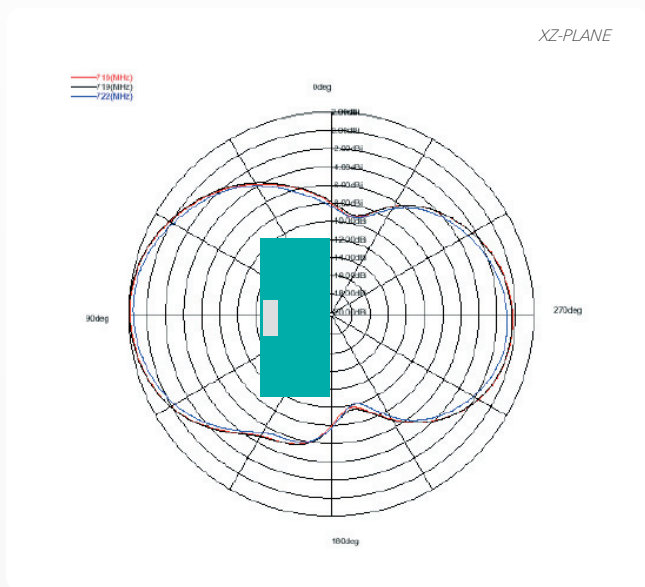

Pulse Antennas

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501

www.pulseeng.com/antennas

