



Three Phase Rectifier Bridge

$I_{dAVM} = 140 \text{ A}$
 $V_{RRM} = 1200-1800 \text{ V}$

V_{RSM}	V_{RRM}	Type
V	V	
1200	1200	VUO 105-12NO7
1400	1400	VUO 105-14NO7
1600	1600	VUO 105-16NO7
1800	1800	VUO 105-18NO7*

* delivery time on request



Symbol	Test Conditions	Maximum Ratings	
I_{dAVM}	$T_C = 85^\circ\text{C}$, module	140 A	
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $V_R = 0$	$t = 10 \text{ ms}$ (50 Hz), sine $t = 8.3 \text{ ms}$ (60 Hz), sine	1500 A 1650 A
	$T_{VJ} = T_{VJM}$ $V_R = 0$	$t = 10 \text{ ms}$ (50 Hz), sine $t = 8.3 \text{ ms}$ (60 Hz), sine	1350 A 1500 A
I^2t	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0$	$t = 10 \text{ ms}$ (50 Hz), sine $t = 8.3 \text{ ms}$ (60 Hz), sine	11250 A ² s 11300 A ² s
	$T_{VJ} = T_{VJM}$ $V_R = 0$	$t = 10 \text{ ms}$ (50 Hz), sine $t = 8.3 \text{ ms}$ (60 Hz), sine	9120 A ² s 9350 A ² s
T_{VJ}		-40...+150 °C	
T_{VJM}		150 °C	
T_{stg}		-40...+150 °C	
V_{ISOL}	50/60 Hz, RMS	$t = 1 \text{ min}$	2500 V~
	$I_{ISOL} \leq 1 \text{ mA}$	$t = 1 \text{ s}$	3000 V~
M_d	Mounting torque (M5)	$5 \pm 15 \%$	Nm
	Terminal connection torque (M5)	$44 \pm 15 \%$	lb.in.
Weight		$5 \pm 15 \%$	Nm
		$44 \pm 15 \%$	lb.in.
	typ.	225	g

Features

- Package with screw terminals
- Isolation voltage 3000 V~
- Planar passivated chips
- Blocking voltage up to 1800 V
- Low forward voltage drop
- UL registered E 72873

Applications

- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors


Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling

Symbol	Test Conditions	Characteristic Values	
I_R	$V_R = V_{RRM}$; $V_R = V_{RRM}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = T_{VJM}$	$\leq 0.3 \text{ mA}$ $\leq 8.0 \text{ mA}$
	$I_F = 150 \text{ A}$;	$T_{VJ} = 25^\circ\text{C}$	$\leq 1.6 \text{ V}$
V_{T0}	For power-loss calculations only	0.8 V	
r_T		5 mΩ	
R_{thJC}	per diode	0.83 K/W	
	per module	0.138 K/W	
R_{thJH}	per diode	1.13 K/W	
	per module	0.188 K/W	

Data according to IEC 60747 and refer to a single diode unless otherwise stated. IXYS reserves the right to change limits, test conditions and dimensions.

Dimensions in mm (1 mm = 0.0394")

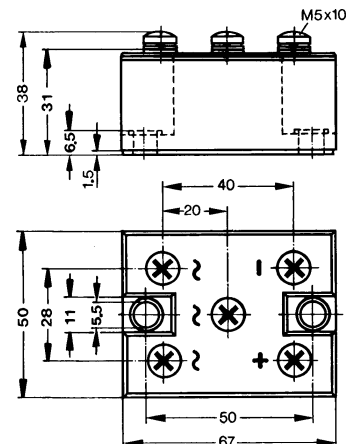

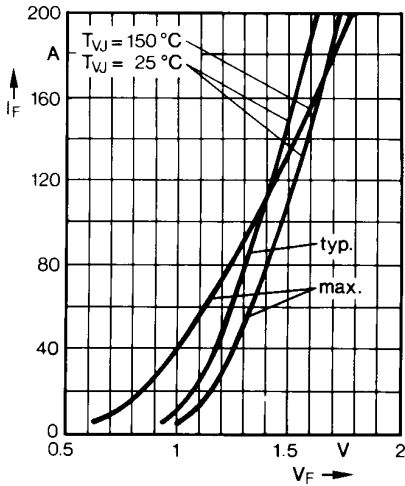


Fig. 1 Forward current versus voltage drop per diode

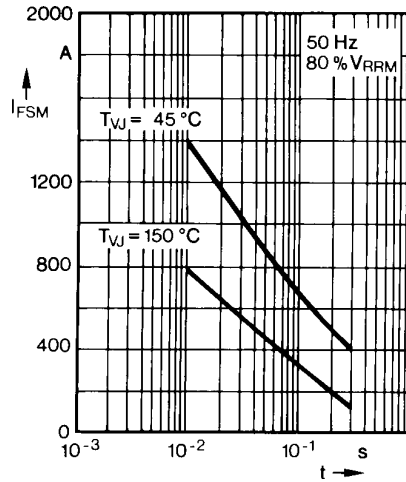


Fig. 2 Surge overload current per diode I_{FSM} : Crest value. t : duration

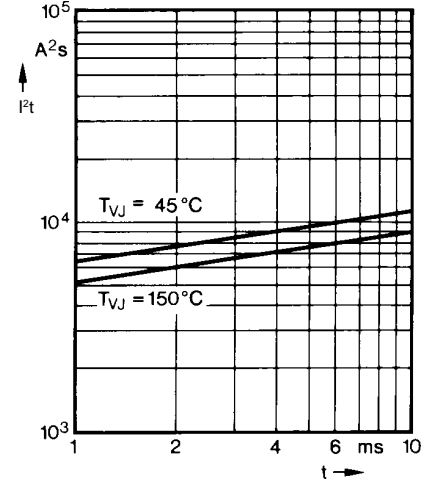


Fig. 3 I^2t versus time (1-10 ms) per diode

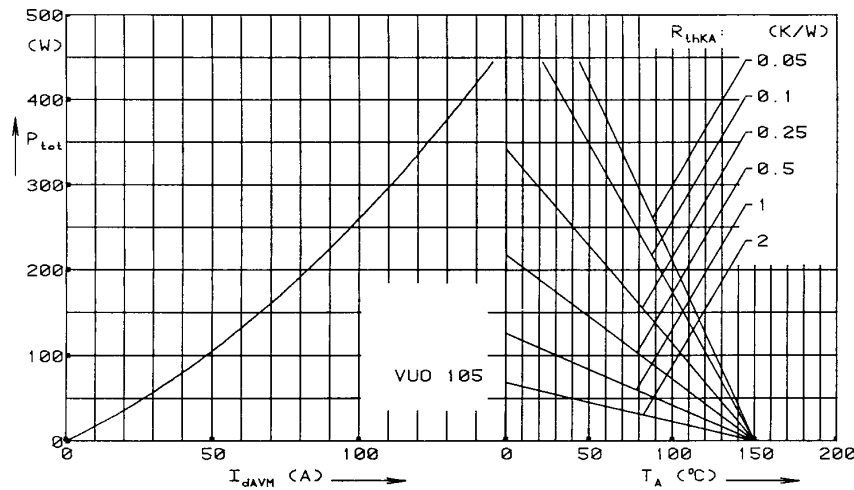


Fig. 4 Power dissipation versus direct output current and ambient temperature

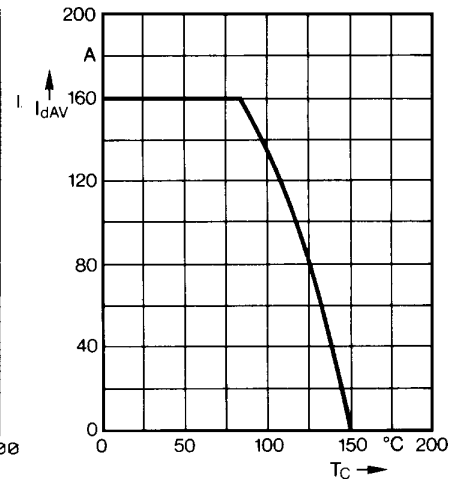


Fig. 5 Maximum forward current at case temperature

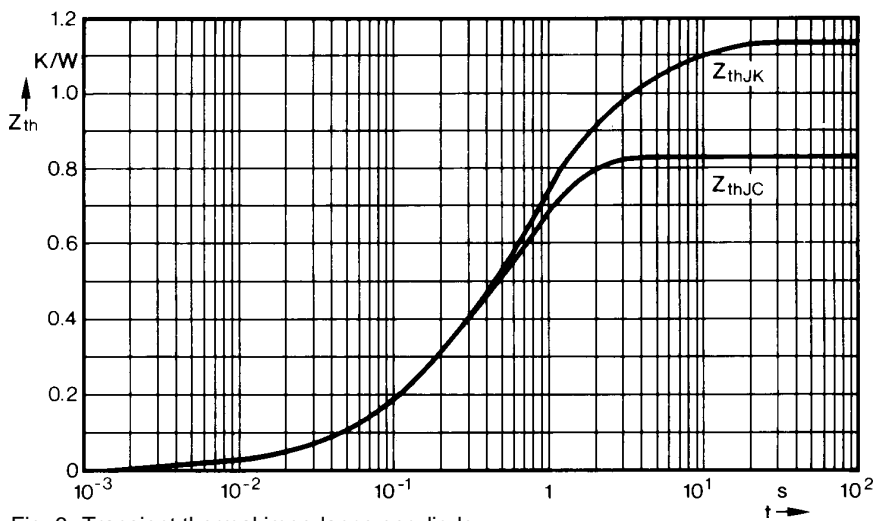


Fig. 6 Transient thermal impedance per diode

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.014	0.011
2	0.067	0.094
3	0.139	0.28
4	0.61	0.7

Constants for Z_{thJK} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.014	0.011
2	0.067	0.094
3	0.139	0.28
4	0.61	0.7
5	0.3	4.2