


#### Features

- Package fully compatible with the industry standard INT-A-pak power modules series
- High thermal conductivity package, electrically insulated case
- Outstanding number of power encapsulated components
- Excellent power volume ratio, outline for easy connections to power transistor and IGBT modules
- 4000 V<sub>RMS</sub> isolating voltage
- UL E78996 approved 

130 A  
160 A

#### Description

A range of extremely compact, encapsulated three phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and heavy duty applications.

#### Major Ratings and Characteristics

Parameters	130MT.KB	160MT.KB	Units	
I <sub>O</sub>	130 (160)	160 (200)	A	
@ T <sub>C</sub>	85 (62)	85 (60)	°C	
I <sub>FSM</sub>	@ 50Hz	1130	1430	A
	@ 60Hz	1180	1500	A
I <sup>2</sup> t	@ 50Hz	6400	10200	A <sup>2</sup> s
	@ 60Hz	5800	9300	A <sup>2</sup> s
I <sup>2</sup> v <sub>t</sub>		64000	102000	A <sup>2</sup> v <sub>s</sub>
V <sub>RRM</sub> range	800 to 1600		V	
T <sub>STG</sub> range	- 40 to 150		°C	
T <sub>J</sub> range	- 40 to 150		°C	

## 130-160MT..KB Series

Bulletin I27502 rev. A 05/03

International  
 Rectifier

### ELECTRICAL SPECIFICATIONS

#### Voltage Ratings

Type number	Voltage Code	$V_{RRM}$ , maximum repetitive peak reverse voltage V	$V_{RSM}$ , maximum non-repetitive peak rev. voltage V	$I_{RRM}$ max. @ $T_J$ max. mA
130-160MT..KB	80	800	900	10
	100	1000	1100	
	120	1200	1300	
	140	1400	1500	
	160	1600	1700	

#### Forward Conduction

Parameter	130MT.KB	160MT.KB	Units	Conditions
$I_O$ Maximum DC output current @ Case temperature	130 (160) 85 (62)	160 (200) 85 (60)	A °C	120° Rect conduction angle
$I_{FSM}$ Maximum peak, one-cycle forward, non-repetitive surge current	1130	1430	A	t = 10ms No voltage reappplied
	1180	1500		t = 8.3ms reappplied
	950	1200		t = 10ms 100% $V_{RRM}$ reappplied
	1000	1260		t = 8.3ms reappplied
$I^2t$ Maximum $I^2t$ for fusing	64000	10200	A <sup>2</sup> s	t = 10ms No voltage reappplied
	5800	9300		t = 8.3ms reappplied
	4500	7200		t = 10ms 100% $V_{RRM}$ reappplied
	4100	6600		t = 8.3ms reappplied
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	64000	102000	A <sup>2</sup> √s	t = 0.1 to 10ms, no voltage reappplied
$V_{F(TO)1}$ Low level value of threshold voltage	0.78	0.81	V	(16.7% $\times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}$ ), @ $T_J$ max.
$V_{F(TO)2}$ High level value of threshold voltage	0.99	1.04		( $I > \pi \times I_{F(AV)}$ ), @ $T_J$ max.
$r_{F1}$ Low level value of forward slope resistance	4.59	3.52	mΩ	(16.7% $\times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}$ ), @ $T_J$ max.
$r_{F2}$ High level value of forward slope resistance	4.17	3.13		( $I > \pi \times I_{F(AV)}$ ), @ $T_J$ max.
$V_{FM}$ Maximum forward voltage drop	1.63	1.49	V	$I_{pk} = 200A$ , $T_J = 25^\circ C$ , $t_p = 400\mu s$ single junction
$V_{INS}$ RMS isolation voltage	4000	4000	V	$T_J = 25^\circ C$ , all terminal shorted f = 50Hz, t = 1s

#### Thermal and Mechanical Specifications

Parameter	130MT.KB	160MT.KB	Units	Conditions
$T_J$ Max. junction operating temperature range	-40 to 150		°C	
$T_{stg}$ Max. storage temperature range	-40 to 150		°C	
$R_{thJC}$ Max. thermal resistance, junction to case	0.16	0.12	K/W	DC operation per module
	0.93	0.73		DC operation per junction
	0.18	0.15		120° Rect conduction angle per module
	1.08	0.88		120° Rect conduction angle per junction
$R_{thCS}$ Max. thermal resistance, case to heatsink	0.03		K/W	Per module Mounting surface smooth, flat and greased
T Mounting torque $\pm 10\%$	4 to 6		Nm	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Lubricated threads.
	to terminal 3 to 4			
wt Approximate weight	176		g	

Document Number: 93558

www.vishay.com

2

Ordering Information Table

Device Code					
16	0	MT	160	K	B
①	②	③	④	⑤	

- 1** - Current rating code: 13 = 130 A (Avg)  
16 = 160 A (Avg)
- 2** - Three phase diodes bridge
- 3** - Essential part number
- 4** - Voltage code: Code x 10 =  $V_{RRM}$  (See Voltage Ratings Table)
- 5** - Generation II

Outline Table (without optional barriers)

Screws M5 x 0.8 Length 10

All dimensions in millimeters (inches)

**NOTE: To order the Optional Hardware see Bulletin I27900**

# 130-160MT..KB Series

Bulletin I27502 rev. A 05/03

International  
**IOR** Rectifier

## Outline Table (with optional barriers)

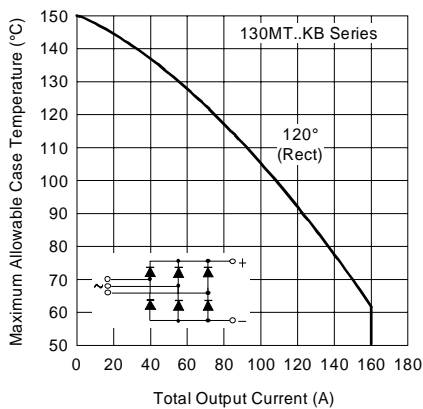
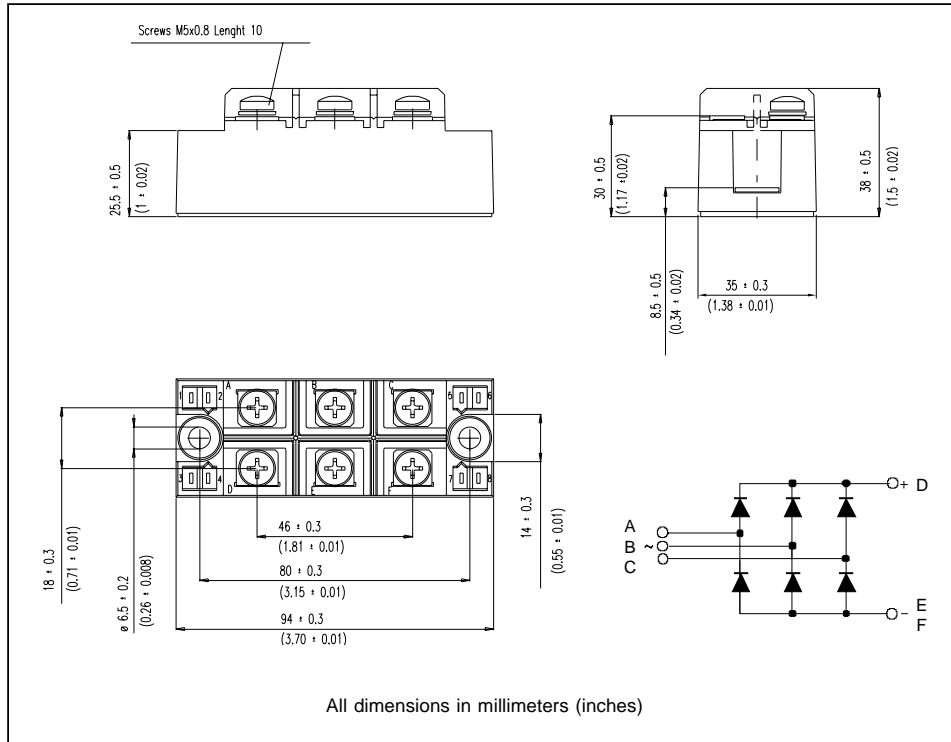


Fig. 1 - Current Ratings Characteristics

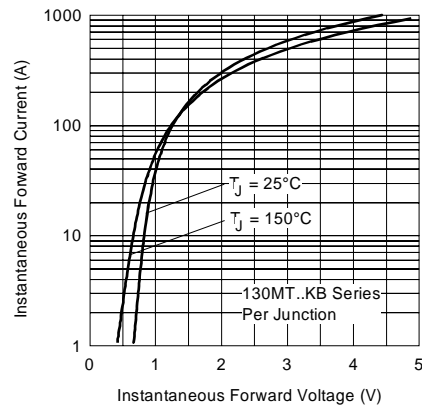


Fig. 2 - Forward Voltage Drop Characteristics

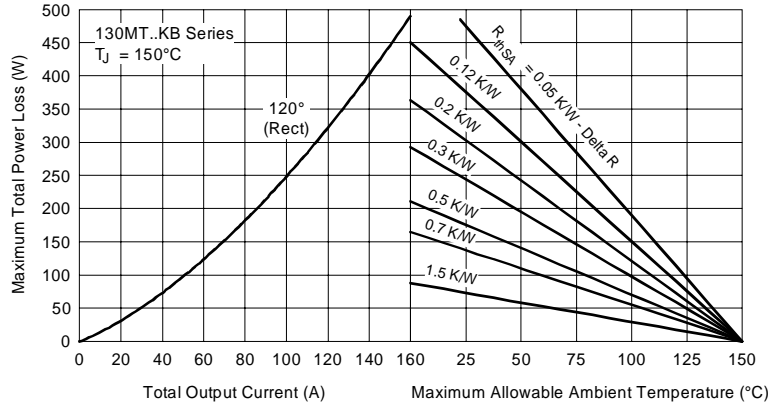


Fig. 3 - Total Power Loss Characteristics

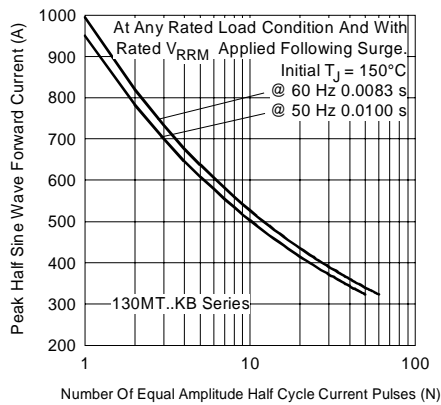


Fig. 4 - Maximum Non-Repetitive Surge Current

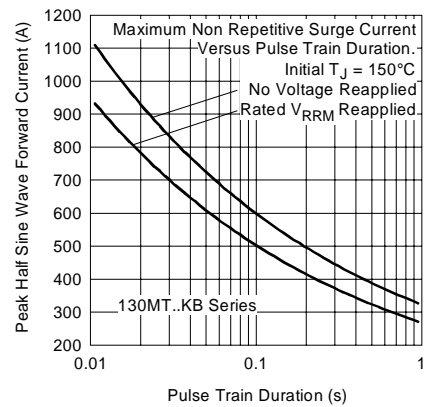


Fig. 5 - Maximum Non-Repetitive Surge Current

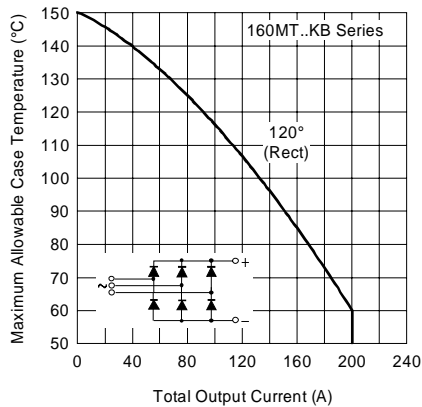


Fig. 6 - Current Ratings Characteristics

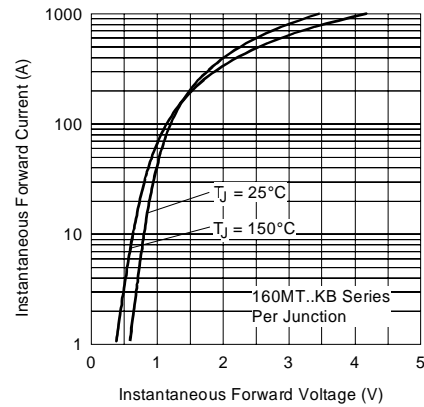


Fig. 7 - Forward Voltage Drop Characteristics

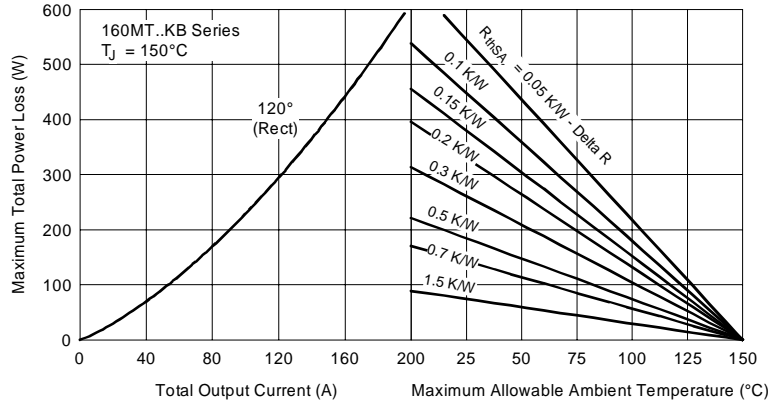


Fig. 8 - Total Power Loss Characteristics

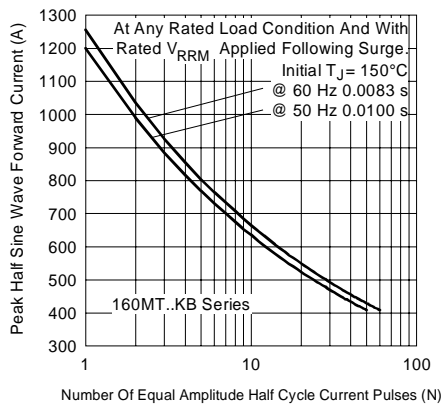


Fig. 9 - Maximum Non-Repetitive Surge Current

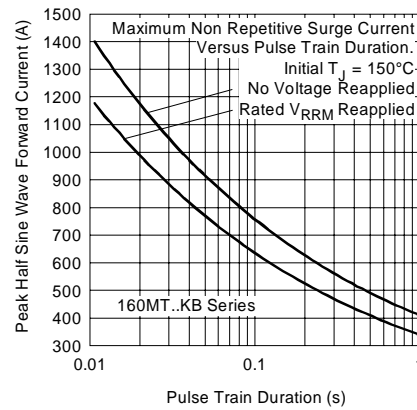


Fig. 10 - Maximum Non-Repetitive Surge Current

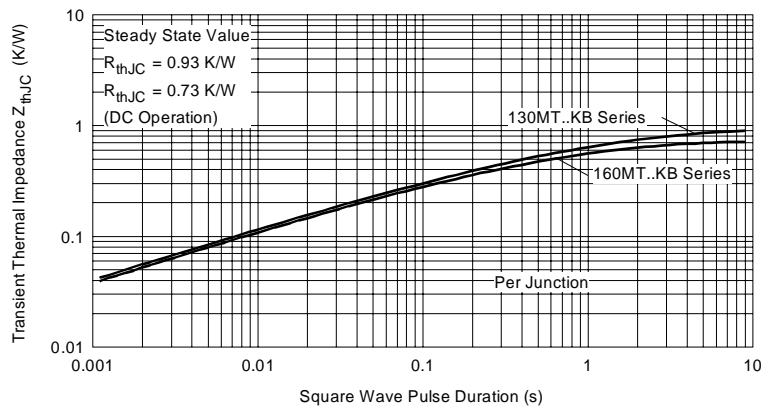


Fig. 11 - Thermal Impedance  $Z_{thJC}$  Characteristic

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
05 /03



## Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.