



Photomicrosensor (Actuator) EE-SA105

⚠ Be sure to read *Precautions* on page 25.

■ Dimensions

Note: All units are in millimeters unless otherwise indicated.

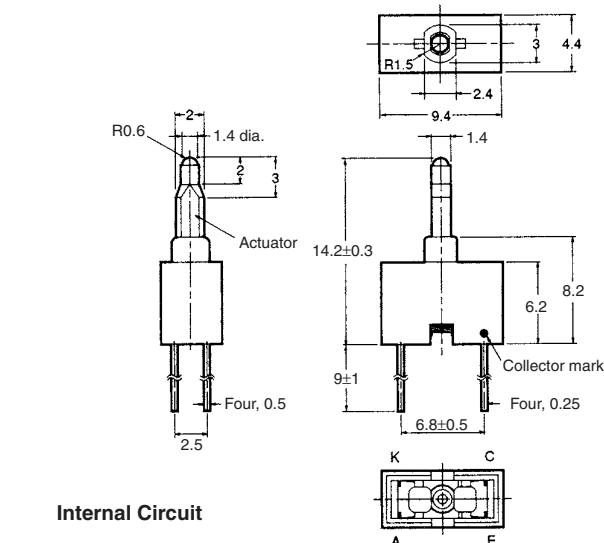

Terminal No.	Name
A	Anode
K	Cathode
C	Collector
E	Emitter

Dimensions	Tolerance
3 mm max.	±0.3
3 < mm ≤ 6	±0.375
6 < mm ≤ 10	±0.45
10 < mm ≤ 18	±0.55
18 < mm ≤ 30	±0.65

Unless otherwise specified, the tolerances are as shown below.

■ Features

- Model has an actuator.
- Low operating force (0.15 N (15 gf)).
- Connects to circuits with ease.

■ Absolute Maximum Ratings (Ta = 25°C)

	Item	Symbol	Rated value
Emitter	Forward current	I _F	50 mA (see note 1)
	Pulse forward current	I _{FP}	1 A (see note 2)
	Reverse voltage	V _R	4 V
	Collector-Emitter voltage	V _{CEO}	30 V
Detector	Emitter-Collector voltage	V _{ECO}	5 V
	Collector current	I _C	20 mA
	Collector dissipation	P _C	100 mW (see note 1)
Ambient temperature	Operating	T _{opr}	-25°C to 70°C
	Storage	T _{stg}	-40°C to 100°C
Soldering temperature		T _{sol}	260°C (see note 3)

- Note: 1. Refer to the temperature rating chart if the ambient temperature exceeds 25°C.
 2. The pulse width is 10 µs maximum with a frequency of 100 Hz.
 3. Complete soldering within 10 seconds.

■ Electrical and Optical Characteristics (Ta = 25°C)

	Item	Symbol	Value	Condition
Emitter	Forward voltage	V _F	1.2 V typ., 1.5 V max.	I _F = 30 mA
	Reverse current	I _R	0.01 µA typ., 10 µA max.	V _R = 4 V
	Peak emission wavelength	λ _P	940 nm typ.	I _F = 20 mA
Detector	Light current	I _L	0.5 mA min.	I _F = 20 mA, V _{CE} = 5 V at free position (FP)
	Dark current	I _D	2 nA typ., 200 nA max.	V _{CE} = 10 V, 0 lux
	Leakage current	I _{LEAK}	10 µA max.	I _F = 20 mA, V _{CE} = 5 V at operating position (OP)
	Collector-Emitter saturated voltage	V _{CE} (sat)	0.15 V typ., 0.4 V max.	I _F = 20 mA, I _L = 0.1 mA
	Peak spectral sensitivity wavelength	λ _P	850 nm typ.	V _{CE} = 10 V
Rising time		tr	---	---
Falling time		tf	---	---

■ Mechanical Characteristics

Actuator operation (I _F = 20 mA, V _{CE} = 5 V) (see note 1)	Free position (FP): 14.2±0.3 mm Operating position (OP): 13.0 mm min. Total travel position (TTP): 12.1 mm max.
Operating force (see note 2)	0.15 N (15 gf) max.
Mechanical life expectancy	500,000 operations min. (The actuator traveling from its FP to FP via TTP is regarded as one operation.)

Note: 1. Free position (FP):

The distance between the bottom of the housing to the top of the actuator without any external force imposed on the actuator.


Operating position (OP):

The distance between the bottom of the housing to the top of the actuator when the actuator is pressed and the I_L becomes I_{LEAK} or less.

Total travel position (TPP):


The distance between the bottom of the housing to the top of the actuator when the actuator is fully pressed.

2. Operating force: The force required to press the actuator from its FP to OP.




■ Engineering Data


Forward Current vs. Collector Dissipation Temperature Rating

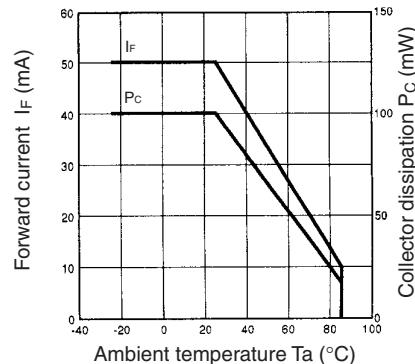


Forward Current vs. Forward Voltage Characteristics (Typical)

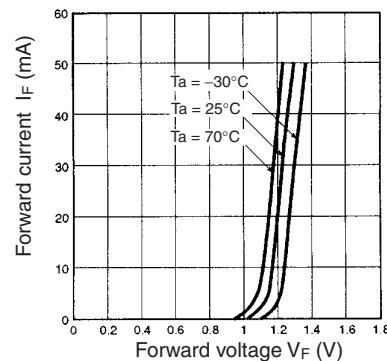


Light Current vs. Forward Current Characteristics (Typical)

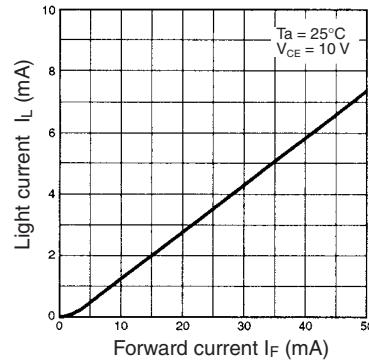


Light Current vs. Collector-Emitter Voltage Characteristics (Typical)

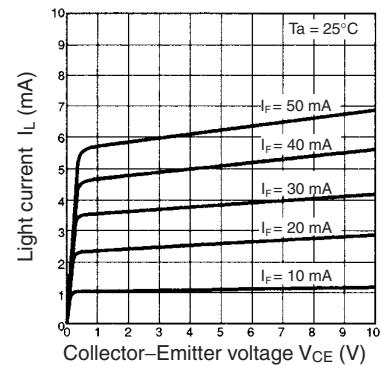

Relative Light Current vs. Ambient Temperature Characteristics (Typical)

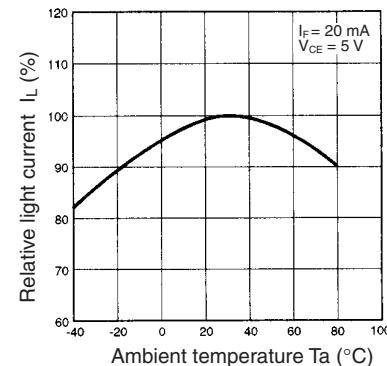

Dark Current vs. Ambient Temperature Characteristics (Typical)

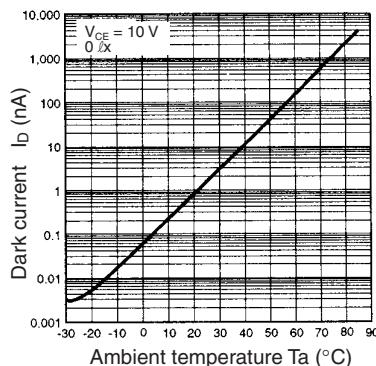

Sensing Position Characteristics (Typical)

