


HOA0149

Reflective Sensor

FEATURES

- Phototransistor output
- Focused for maximum response
- Low profile housing

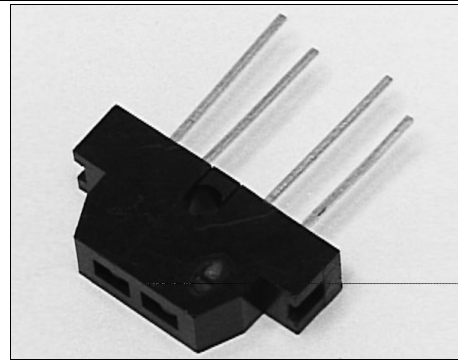

INFRA-59.TIF


DESCRIPTION

The HOA0149 consists of an infrared emitting diode and an NPN silicon phototransistor encased side-by-side on converging optical axes in a black thermoplastic housing. The phototransistor responds to radiation from the IRED only when a reflective object passes within its field of view. The HOA0149 employs plastic molded components. For additional component information see SEP8505 and SDP8405.

Housing material is ABS. Housings are soluble in chlorinated hydrocarbons and ketones. Recommended cleaning agents are methanol and isopropanol.

OUTLINE DIMENSIONS in inches (mm)

Tolerance 3 plc decimals ±0.010(0.25)
2 plc decimals ±0.020(0.51)

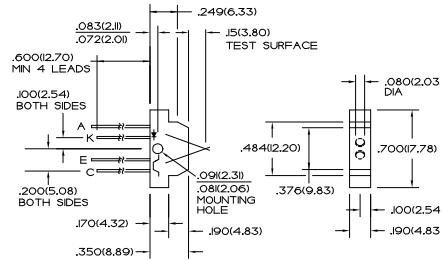

DIM_038.cdr

HOA0149

Reflective Sensor

ELECTRICAL CHARACTERISTICS (25°C unless otherwise noted)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
IR EMITTER						
Forward Voltage	V_F		1.6		V	$I_F=20\text{ mA}$
Reverse Leakage Current	I_R		10		μA	$V_R=3\text{ V}$
DETECTOR						
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	30			V	$I_C=100\ \mu\text{A}$
Emitter-Collector Breakdown Voltage	$V_{(BR)ECO}$	5.0			V	$I_E=100\ \mu\text{A}$
Collector Dark Current	I_{CEO}		100		nA	$V_{CE}=15\text{ V}, I_F=0$
COUPLED CHARACTERISTICS						
On-State Collector Current HOA0149-001	$I_{C(ON)}$	1.0			mA	$V_{CE}=5\text{ V}, I_F=40\text{ mA}$ (1)
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$		0.4		V	$I_C=125\ \mu\text{A}, I_F=40\text{ mA}$ (1)
Rise And Fall Time	t_r, t_f		15		μs	$V_{CC}=5\text{ V}, I_C=1\text{ mA}$

Notes

1. Test surface is a front surface mirror (polished aluminum, 85% reflectance) located 0.15 in.(3.80 mm) from the front surface of the device.

ABSOLUTE MAXIMUM RATINGS

(25°C Free-Air Temperature unless otherwise noted)

Operating Temperature Range	-40°C to 85°C
Storage Temperature Range	-40°C to 85°C
Soldering Temperature (5 sec)	240°C


IR EMITTER

Power Dissipation	70 mW (1)
Reverse Voltage	3 V
Continuous Forward Current	50 mA

DETECTOR

Collector-Emitter Voltage	30 V
Emitter-Collector Voltage	5 V
Power Dissipation	70 mW (1)
Collector DC Current	30 mA

SCHEMATIC



Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

Honeywell

229

HOA0149

Reflective Sensor

Fig. 1 IRED Forward Bias Characteristics

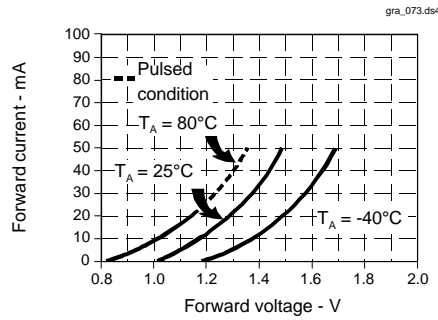


Fig. 2 Non-Saturated Switching Time vs Load Resistance

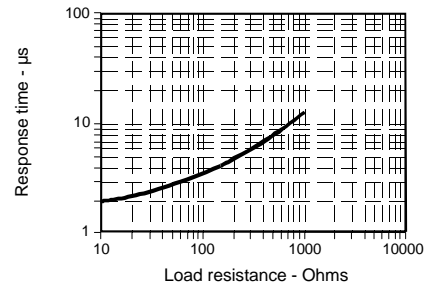


Fig. 3 Dark Current vs Temperature

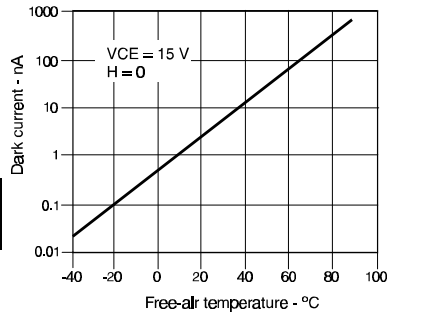


Fig. 4 Collector Current vs Ambient Temperature

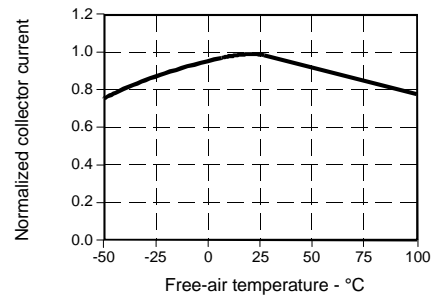


Fig. 5 Collector Current vs Distance to Reflective Surface


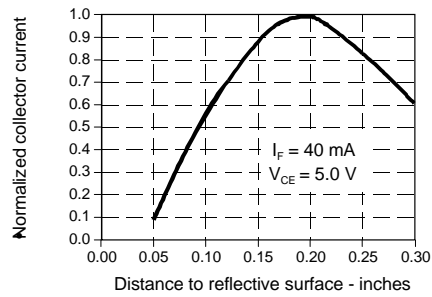


Fig. 6 Collector Current vs IRED Forward Current



All Performance Curves Show Typical Values

HOA0149
Reflective Sensor

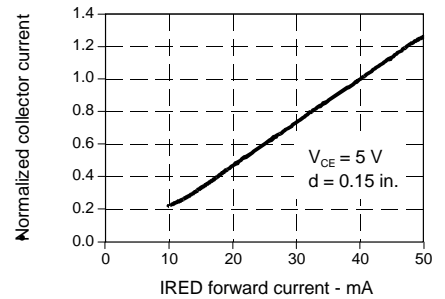

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

Honeywell

231