

Installation Instructions for the ASDX Series Silicon Pressure Sensors with Analog Output

ISSUE 5
50042440

GENERAL INFORMATION

The ASDX Series are Silicon Pressure Sensors offering a ratiometric analog output for reading pressure over the specified full scale pressure span and temperature range. These sensors are fully calibrated and temperature compensated for sensor offset, sensitivity, temperature effects and non-linearity using an on-board Application Specific Integrated Circuit (ASIC). They are available to measure absolute, differential and gage pressures. The absolute versions have an internal vacuum reference and an output value proportional to absolute pressure. Differential versions allow application of pressure to either side of the sensing diaphragm. Gage versions are referenced to atmospheric pressure and provide an output proportional to pressure variations from atmosphere. These sensors are intended for use with non-corrosive, non-ionic working fluids such as air and dry gases.

SOLDERING

Limit soldering to 250 °C [482 °F] max., with a duration of 2 s to 4 s.

CLEANING

Proper cleaning fluids should be selected based on the type of contaminants to be removed. Honeywell recommends alcohols or fluorinated solvents. Do not immerse the sensor.

Table 1. Environmental Specifications

Parameter	Characteristic
Humidity	0% to 95% RH non-condensing
Vibration	10 G at 20 Hz to 2000 Hz
Shock	100 G for 11 ms
Life	1 million cycles minimum

Table 2. Specifications

Parameter	Min.	Typ.	Max.	Unit
Supply voltage				
3.3 Vdc	3.0	3.3	3.6	Vdc
5.0 Vdc	4.75	5.0	5.25	
Supply current	1.5	2.5	3.5	mA
Compensated temperature range	0 [32]	-	85 [185]	°C [°F]
Operating temperature range	-20 [-4]	-	105 [221]	°C [°F]
Storage temperature range	-50 [-58]	-	125 [257]	°C [°F]
Proof pressure	2X operating pressure range minimum			
Burst pressure	3X operating pressure range minimum			
Startup time (power up to data ready)	-	-	5	ms

General Notes:

- The sensor is not reverse polarity protected. Incorrect application of excitation voltage or ground to the wrong pin may cause electrical failure.
- Proof pressure is the maximum pressure allowed without damaging calibration.
- Burst pressure is the maximum pressure allowed without damaging the sensor.
- The compensated temperature range is the temperature range (or ranges) over which the sensor will produce an output proportional to pressure within the specified performance limits.
- The operating temperature range is the temperature range over which the sensor will produce an output proportional to pressure but may not remain within the specified performance limits.
- Application of supply voltage above the maximum value may cause electrical failure.
- An external bypass capacitor is **required** across the supply voltage as close to the sensor supply pin as possible for correct sensor operation.

Figure 1. Mounting Dimensions and Pinout (For reference only. mm/[in])

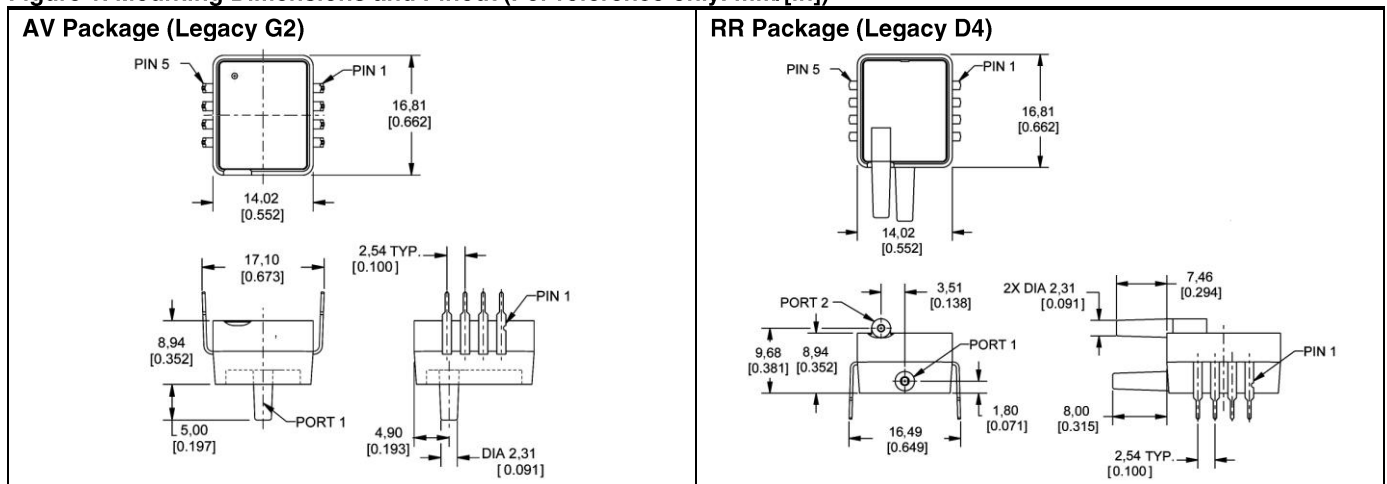


Figure 2. Mounting Dimensions and Pinout (For reference only. mm/[in]) Continued

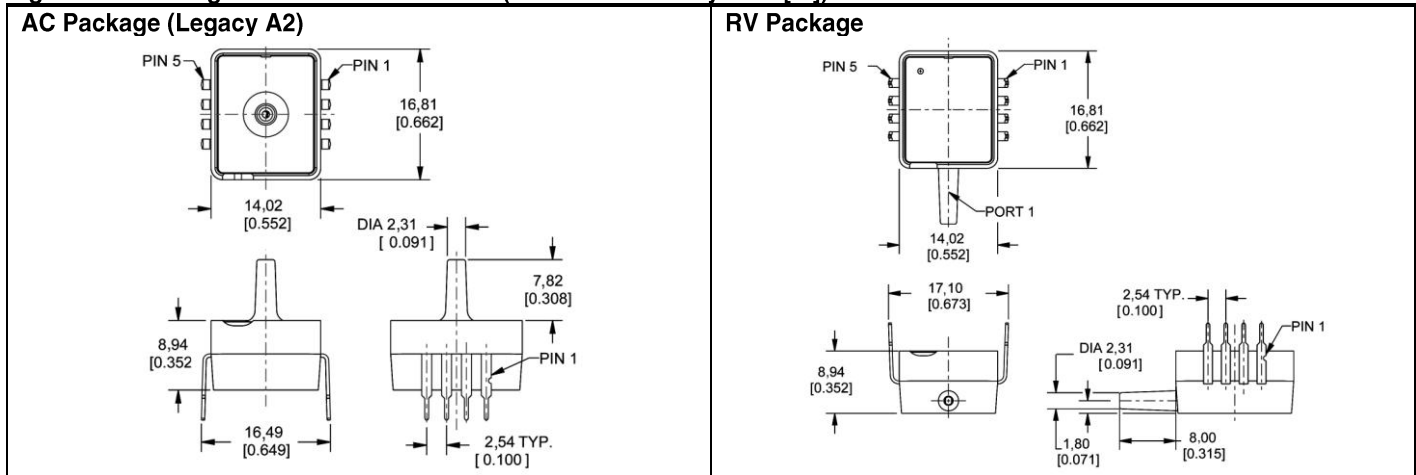


Table 3. Pinout

Pin	Definition	Type	Description
1	VDD	supply	power supply source
2	Vout	analog output	provides the analog output
3	GND	supply	power supply ground
4	N/C	not used	do not connect in the application
5	N/C	not used	do not connect in the application
6	N/C	not used	do not connect in the application
7	N/C	not used	do not connect in the application
8	N/C	not used	do not connect in the application

⚠ WARNING
PERSONAL INJURY
 DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.
Failure to comply with these instructions could result in death or serious injury.

WARRANTY/REMEDY
 Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

SALES AND SERVICE
 Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office or:

E-mail: info.sc@honeywell.com

Internet: www.honeywell.com/sensing

Phone and Fax:
 Asia Pacific +65 6355-2828
 +65 6445-3033 Fax
 Europe +44 (0) 1698 481481
 +44 (0) 1698 481676 Fax
 Latin America +1-305-805-8188
 +1-305-883-8257 Fax
 USA/Canada +1-800-537-6945
 +1-815-235-6847
 +1-815-235-6545 Fax

Sensing and Control
 Honeywell
 1985 Douglas Drive North
 Golden Valley, MN 55422
www.honeywell.com/sensing

50042440-5-EN IL50 GLO Printed in USA
 July 2010
 Copyright © 2010 Honeywell International Inc. All rights reserved.

