

Pomona®

Model 6087 Field Service Kit, Red, ESD

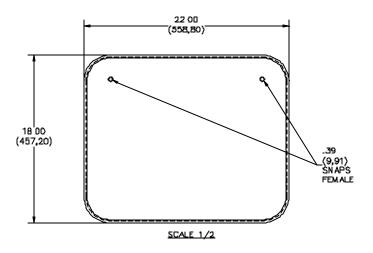



FEATURES:

- Complete and durable service kit for static sensitive work.
- Features is a static-safe 460 x 560 mm (18" x 22") laminated red vinyl mat.
- Kit includes a mat with two 10mm snap sockets, common point ground connector with two Banana Plug Jacks and a 15' ground lead, an adjustable elastic wrist strap (Model 6081) and a resistive coil cord (Model 5534)
- Folds down to fit into your tool kit

MATERIALS:

Anti-Static Ground Cord

Body: Plug – Brass, nickel plate, fits 4,2 (.17) standard Banana Jack

Insulation: Banana Plug – Thermoplastic elastomer, Black Cord: Coiled Tinsel Cord, vinyl jacket, 2,5 (.10) O.D. Body: Snap – Brass, nickel plate, fits 4,0 (.16) snap stud Insulation: Snap – Thermoplastic elastomer, Black

Wrist Strap

Body: Impact resistant plastic, Blue

Strap: Elastic fibers with silver plated Nylon, Yarn, Circumference: 64,0 (2.50) min., 330,0 (13.00) Max.

Snap and Cam: Stainless Steel, 4,0 (.16) snap stud

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99

SY/FH/LS

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060 Pomona*ACCESS* **90844** (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com

C:\Laura Goldberg\FlukeDataSheet\d6087_1_01.doc

Pomona®

Model 6087 Field Service Kit, Red, ESD

MAT, ESD: 0,46 (.018") thick, vinyl, Red

Common Point Ground Cord Snap W/BananaJacks End:

Body: Snap – Brass, Nickel Plate. 10,0 (.39), Male

Resistor: One Megohm resistor, insulated Insulation: Snap – Thermoplastic elastomer, Black

Cord: 22 AWG, vinyl jacket, 2,5 (.10) O.D., Length: 46,0 (17.0) Banana Jacks: Brass, Nickel plated. Fits 4,2 (.17) STD B-Plug

Insulation: PVC, Black

RATINGS:

Surface Resistivity: 108 to 109 Ohm/Sq.

Volume Resistivity: 109 Ohm cm

Static Decay: 0.01 sec 5000V to 0V 12% RH

ORDERING INFORMATION: Model 6087

Packaging: One Anti-Static ground cord, common point ground cord, Mat, Wrist strap, and two instruction sheets, per bag

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99 SY/EH/LS Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060

Pomona*ACCESS* **90844** (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com

C:\Laura Goldberg\FlukeDataSheet\d6087_1_01.doc