
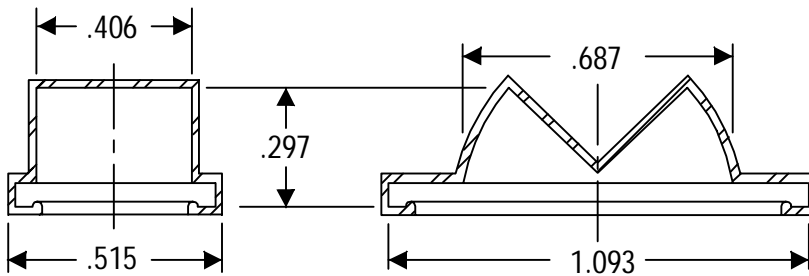


SPECIFICATIONS

Material: APM RUBGLASTM (transparent silicone rubber), polymer type, ASTM D1418
Temperature Range: -80°F to +400°F
Operational Life: 50,000 actuations (minimum).
Resistant to: Salt spray, sunlight, ozone, weather, fungus, and most acids and lubricating oils
Agency Recognition: Rock-R-SeelsTM are UL-listed to UL Std. 50, types 1, 2, 4R, 5, 12, 12k, 13, and meet CSA standard
Shelf Life: Excess of 25 years.

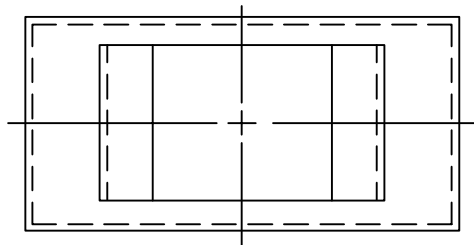

B	CHANGED DWG # FROM C1113/63 to 1113/63, REVISED TITLE FOR ACCURACY		07.22.08
A	CAD COMPUTER GENERATED		10.23.02
REV.	DESCRIPTION		DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.	TITLE	ROCKER SWITCH	ENG. S. GOK 07.22.08
		BOOT 1 POLE	DWN. M.M. 02.21.86
			CHKD. J. CELLA 07.22.08
MAT'L: RUBGLAS®	APM-HEXSEAL CORPORATION	SCALE 2:1	DWG. NO. 1113/63
FINISH: TRANSPARENT			

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.