


### Technical Data

- Max. 250mA/120V/9W AC/6W DC
- 2 pole
- momentary or alternate
- 8 contact functions
- temperature range:
  - low temp: -40/+75°C
  - high temp: -40/+160°C
- through-hole version

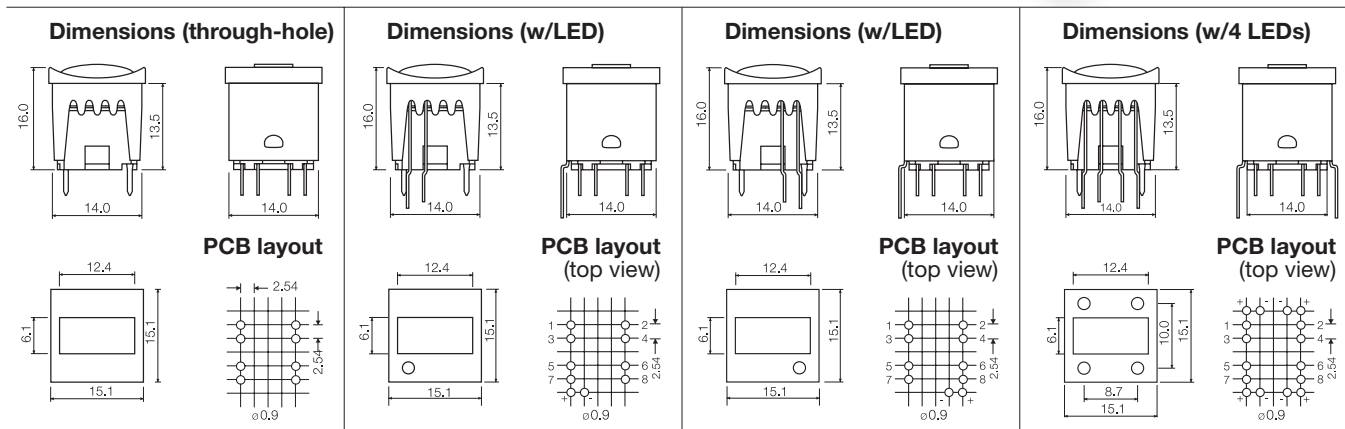

### How to order

	<b>1 5</b>	+	<b>1 6 3 0 0</b>	+	<b>1 6 3 1 0</b>	<b>For 16300 and 16310 only</b> <b>30</b> ultra blue <b>40</b> dusty blue <b>42</b> aqua blue <b>32</b> mint green <b>33</b> tele grey <b>34</b> melon <b>38</b> noble red <b>50</b> metal dark blue <b>53</b> metal light grey <b>57</b> metal dark grey <b>58</b> metal bordeaux
	<b>Switch</b> 15501 mom. silver 15551 alt. silver 15502 mom. gold 15552 alt. gold 15500 silent silver 15401 mom. silver high temp. 15402 mom. gold high temp. 15420 silent gold high temp. 15451 alt. silver high temp.	<b>Cap</b>  00 blue 01 brown 02 green 03 grey 04 yellow 05 golden 06 white 07 orange 08 red 09 black	<b>Bezel</b>  00 blue 01 brown 02 green 03 grey 04 yellow 05 golden 06 white 07 orange 08 red 09 black			

	<b>1 5</b>	+	<b>1 6 3 0 0</b>	+	[ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ]	+	<b>1 6 9 2 1</b>	<b>LED 16921</b> 02 green 04 yellow 08 red
	<b>Switch</b>	<b>Cap</b> 	<b>Bezel 16311</b> 	<b>Bezel 16312</b> 	<b>Bezel 16314</b> 	<b>Bezel 16315</b> 	<b>LED 16920</b> 02 green 04 yellow 08 red	<b>LED 16920</b> 1 required <b>LED 16921</b> 1 required

Ordering example: 15501 + 1630003 + 1631408 + 1692008 + 1692108

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)