

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		AM3		REVISED PER ECO-11-004587	11MAR11	RK	HMR

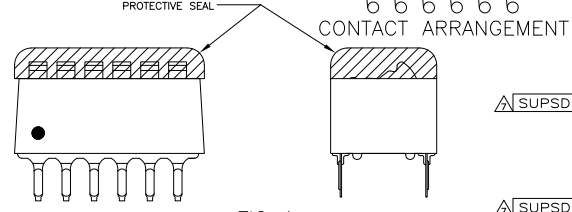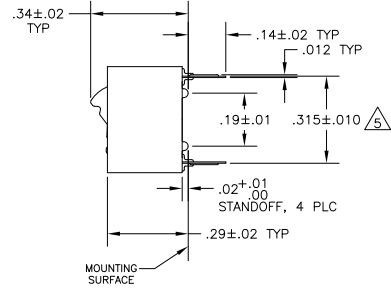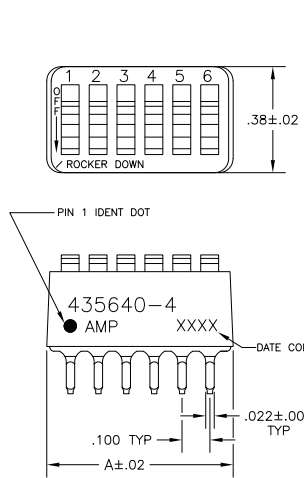

- FOR ADDITIONAL SPECIFICATIONS SEE AMP PRODUCT SPEC 108-7532.
  - SWITCH SHOWN IN OPEN POSITION.
  - ALL CHARACTERS AND ROCKERS ARE WHITE, HOUSING IS BLUE.
  - STAMPING WILL VARY ON 2 AND 3 POSITION SIDES DUE TO SPACE RESTRICTIONS.
- △ .315 DIMENSION APPLIES AT TERMINAL TIPS.  
 TERMINALS ARE .300±.000 AT MOUNTING SURFACE.
- △ STRIPPABLE TRANSPARENT SEAL, SEE FIG 1.




FIG 2




FIG 3




FIG 4




FIG 5




FIG 6




FIG 7

REVISIONS	FIG	DESCRIPTION	DATE	BY	APPD
△ OBSOLETE	FIG 6		11-08	10	6-435640-1
△ OBSOLETE	FIG 7		.58	5	6-435640-0
△ OBSOLETE	FIG 5		.48	4	5-435640-9
△ OBSOLETE	FIG 5		.88	8	5-435640-8
△ OBSOLETE	FIG 2		.98	9	5-435640-7
△ OBSOLETE	FIG 5		.68	6	5-435640-6
△ OBSOLETE	FIG 5		.48	4	5-435640-4
△ OBSOLETE	FIG 3		.88	8	5-435640-3
△ OBSOLETE	FIG 3		1.08	10	5-435640-2
△ OBSOLETE	FIG 3		.88	8	5-435640-0
△ OBSOLETE	FIG 3		.88	8	4-435640-9
△ OBSOLETE	FIG 3		.58	5	4-435640-8
△ OBSOLETE	FIG 3		1.08	10	4-435640-7
△ OBSOLETE	FIG 3		1.28	12	4-435640-3
△ OBSOLETE	FIG 3		1.08	10	4-435640-1
△ OBSOLETE	FIG 3		.98	9	4-435640-0
△ OBSOLETE	FIG 3		.88	8	3-435640-9
△ OBSOLETE	FIG 3		.78	7	3-435640-8
△ OBSOLETE	FIG 3		.68	6	3-435640-7
△ OBSOLETE	FIG 3		.58	5	3-435640-6
△ OBSOLETE	FIG 3		.48	4	3-435640-5
△ OBSOLETE	FIG 3		.38	3	3-435640-4
△ OBSOLETE	FIG 3		.28	2	3-435640-3
△ OBSOLETE	FIG 4		1.28	12	3-435640-2
△ OBSOLETE	FIG 4		.38	3	3-435640-0
△ OBSOLETE	FIG 2		.28	2	2-435640-9
△ OBSOLETE	FIG 2		.78	7	2-435640-2
△ OBSOLETE	FIG 2		1.08	10	435640-7
△ OBSOLETE	FIG 2		.98	9	435640-6
△ OBSOLETE	FIG 2		.88	8	435640-5
△ OBSOLETE	FIG 2		.68	6	435640-4
△ OBSOLETE	FIG 2		.58	5	435640-3
△ OBSOLETE	FIG 2		.48	4	435640-2
△ OBSOLETE	FIG 2		.78	7	435640-1

△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 15NOV09

BY: R.TALLEY  
 CHK: D.MARINO  
 S: L.MILLER  
 J.LLEITER  
 PRODUCT SPEC: 7100 SERIES, SPST, STANDARD

MATERIAL: HOUSING & ROCKERS: POLYESTER  
 CONTACTS: COPPER ALLOY  
 FINISH: CONDUCTIVE PLATED (200000 MIN GOLD IN CONTACT AREA OVER 200000 MIN NICKEL)

SIZE: A2  
 CASE CODE: 00779  
 DRAWING NO: 435640

CUSTOMER DRAWING  
 SCALE: 4:1  
 SHEET: 1 of 1  
 REV: AM3

TE Connectivity  
 SWITCH ASSY, DIP, TYPE C,  
 7100 SERIES, SPST, STANDARD