


THIS DRAWING IS UNPUBLISHED
 UNLESS INDICATED OTHERWISE
 ALL INFORMATION IS UNCLASSIFIED
 UNLESS INDICATED OTHERWISE

REV	DATE	DESCRIPTION	BY	CHKD
AD	00	REVISED PER ECO-08-023819		

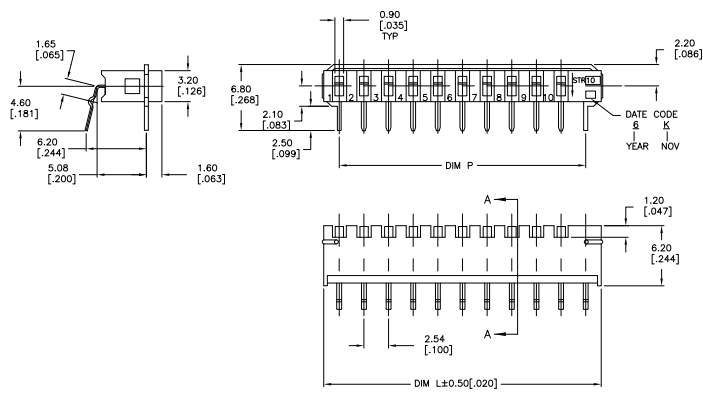

SPECIFICATIONS


MATERIALS:
 CASE, PPS UL94V-0, BLACK
 COVER, PBT UL94V-0, BLACK
 ACTUATOR, 46 NYLON UL94V-0, WHITE
 TERMINAL/FIXED CONTACT- COPPER ALLOY- GOLD OVER NICKEL PLATE
 MOVING CONTACT- COPPER ALLOY- GOLD FLASH OVER NICKEL PLATE
 HOLDER, COPPER ALLOY, TIN OVER NICKEL FINISH

ELECTRICAL:
 RATING- 1a max non-switching
 0.1mA (1mV) min switching
 DC 5V 10mA INITIAL
 CONTACT RESISTANCE- 50milliohm max. (300 milliohms after test)
 INSULATION RESISTANCE- 100Megohms min. at 100V DC
 DIELECTRIC STRENGTH- 300V RMS/50% LEVEL
 LIFE EXPECTANCY- 1,000 CYCLES

MECHANICAL:
 ACTUATION FORCE- 2.45 +/-1.47N (245 +/-147 GF)
 TRAVEL- .35"

ENVIRONMENTAL:
 OPERATING TEMPERATURE- -30 TO +85 DEGREES C
 STORAGE TEMPERATURE- -45 TO +100 DEGREES C
 RESISTANCE TO SOLDER HEAT- 265 +/-3°C for 8 +/-2 seconds
 SOLDERABILITY PER JIS-C-0050 & JIS-C-0053

- 1 ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)
- 2 SWITCH SUPPLIED IN THE "OFF" POSITION AND SHOULD BE SOLDERED IN THE "OFF" POSITION.

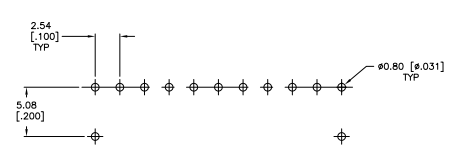

P.C. LAYOUT

DIM P	DIM L	T&B P/N	PART NUMBER
25.40 (1.000)	28.60 (1.126)	STR10	1977105-5
20.32 (.800)	23.52 (.926)	STR08	1977105-4
15.24 (.600)	18.44 (.726)	STR06	1977105-3
10.16 (.400)	13.36 (.526)	STR04	1977105-2
5.08 (.200)	8.28 (.326)	STR02	1977105-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DATE: 10/07/99
 DRAWING NO: 100779
 CUSTOMER DRAWING

DESIGNED BY: [Signature]
 CHECKED BY: [Signature]
 APPROVED BY: [Signature]

DATE: 10/07/99
 DRAWING NO: 100779
 CUSTOMER DRAWING

DATE: 10/07/99
 DRAWING NO: 100779
 CUSTOMER DRAWING

DATE: 10/07/99
 DRAWING NO: 100779
 CUSTOMER DRAWING