SHEET 1 OF 1

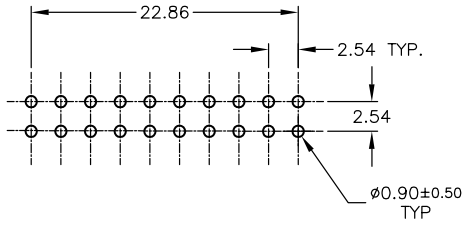

RECOMMENDED P.C.B. LAYOU



CIRCUIT

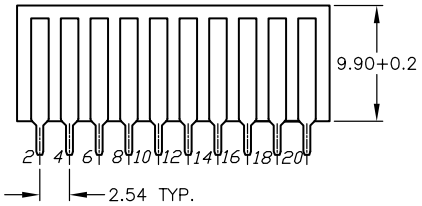

BACK VIEW

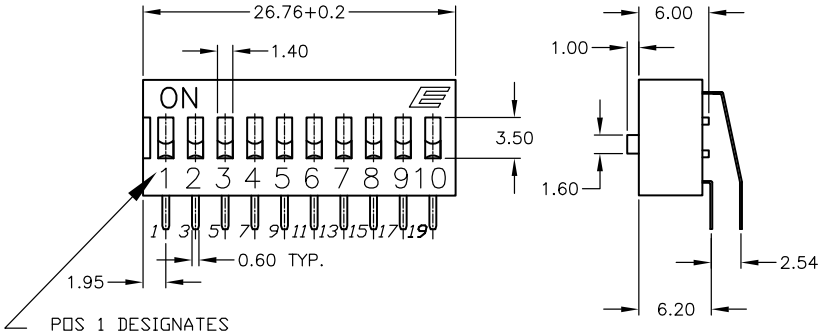

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC.
5. MATERIAL (TERMINALS/CONTACTS):
   PHOSPHOR BRONZE w/GOLD PLATE OVER NICKEL PLATE
6. INSULATION RESISTANCE:
   100MEGA-OHMS MIN @500VDC
7. CONTACT RESISTANCE (INITIAL):
   50mILLI-OHMS @2-4VDC @100mA
8. OPERATING FORCE: 1000GF MAX.
9. TRAVEL: 2MM TYPICAL
10. ▲ PACKAGED: DISPENSING TUBES WITH ALL POLES IN THE "OFF" POSITION.
11. ▲ DENOTES CRITICAL PARAMETER.

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	13541	RELEASED FOR PRODUCTION	10/17/03	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: KAS2110E

SCALE	DATE	DR	DWG	REV
2:1	10/17/03	AR	N321100	A

Downloaded from Elcodis.com electronic components distributor