




THIS DRAWING IS UNPUBLISHED
 UNLESS INDICATED OTHERWISE
 © 2002 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK	APP
AZ	02-06-214542				

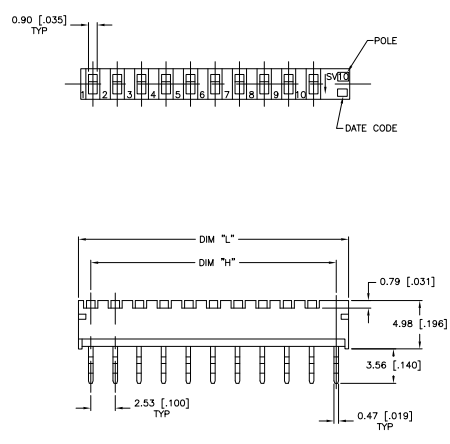

SPECIFICATIONS:

MATERIALS:
 BASE: PPS UL94V-0, BLACK
 COVER: PPS UL94V-0, BLACK
 ACTUATOR: 4/6 NYLON UL94V-0, WHITE
 MOVING CONTACT: COPPER ALLOY, GOLD OVER NICKEL
 FIXED CONTACT/TERMINAL: COPPER ALLOY, GOLD OVER NICKEL

ELECTRICAL:
 CONTACT RATING: 4VA@20V DC MAX
 CONTACT RESISTANCE: 50 MILLIOHMS MAX
 INSULATION RESISTANCE: 100 MEGOHMS MIN AT 100V DC
 DIELECTRIC STRENGTH: 500V AC RMS @ SEA LEVEL
 LIFE EXPECTANCY: 1,000 CYCLES

MECHANICAL:
 ACTUATION FORCE: 800 GRAMS MAX
 TRAVEL: .050

ENVIRONMENTAL:
 OPERATING TEMPERATURE: -30° TO +85°C
 STORAGE TEMPERATURE: -45° TO +100°C
 RESISTANCE TO SOLDER HEAT 265±3°C FOR 8±2 SECONDS
 SOLDERABILITY PER JIS C 0050 & JIS C 0053

NOTES:
 1. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

△ MARK "ALCO" ON THIS SURFACE.

25.40[1.000]	27.89[1.098]	SSV1004	1825152-5
20.32[.800]	22.81[.898]	SSV0804	1825152-4
15.24[.600]	17.73[.698]	SSV0604	1825152-3
10.16[.400]	12.65[.498]	SSV0404	1825152-2
5.08[.200]	7.57[.298]	SSV0204	1825152-1
DIM "h"	DIM "L"	T&B P/N	TYCO P/N

THIS DRAWING IS A CONTROLLED DOCUMENT

DESIGNER: []	ENGINEER: []	DATE: []	REV: []
BY: []	CHK: []	APP: []	DATE: []
SEE SPECIFICATIONS			

Customer Drawing: 100779G-1825152

TYCO ELECTRONICS CORPORATION
 HARRISBURG, PA 17105-3608

SIP SWITCH
 (SSV02 - 10 SERIES)

DATE: 02/06/02
 DRAWING NO: 100779G-1825152
 SHEET: 5 OF 1