


# HiPerFAST™ IGBT


## IXGN 200N60B

$V_{CES} = 600 \text{ V}$   
 $I_{C25} = 200 \text{ A}$   
 $V_{CE(sat)} = 2.1 \text{ V}$



Symbol	Test Conditions	Maximum Ratings
$V_{CES}$	$T_J = 25^\circ\text{C to } 150^\circ\text{C}$	600 V
$V_{CGR}$	$T_J = 25^\circ\text{C to } 150^\circ\text{C}; R_{GE} = 1 \text{ M}\Omega$	600 V
$V_{GES}$	Continuous	$\pm 20$ V
$V_{GEM}$	Transient	$\pm 30$ V
$I_{C25}$	$T_C = 25^\circ\text{C}$	200 A
$I_L$	Terminal Current Limit	100 A
$I_{C90}$	$T_C = 90^\circ\text{C}$	120 A
$I_{CM}$	$T_C = 25^\circ\text{C}, 1 \text{ ms}$	400 A
<b>SSOA (RBSOA)</b>	$V_{GE} = 15 \text{ V}, T_{VJ} = 125^\circ\text{C}, R_G = 2.4 \Omega$ Clamped inductive load, $L = 30 \mu\text{H}$	$I_{CM} = 200$ @ $0.8 V_{CES}$ A
$P_c$	$T_C = 25^\circ\text{C}$	600 W
$T_J$		-55 ... +150 °C
$T_{JM}$		150 °C
$T_{stg}$		-55 ... +150 °C
$V_{ISOL}$	50/60 Hz $t = 1 \text{ min}$ $I_{ISOL} \leq 1 \text{ mA}$ $t = 1 \text{ s}$	2500 V~ 3000 V~
$M_d$	Mounting torque Terminal connection torque (M4)	1.5/13 Nm/lb.in. 1.5/13 Nm/lb.in.
<b>Weight</b>		30 g

### SOT-227B, miniBLOC



G = Gate, C = Collector, E = Emitter  
 Ⓞ either emitter terminal can be used as Main or Kelvin Emitter

### Features

- International standard package miniBLOC
- Aluminium nitride isolation - high power dissipation
- Isolation voltage 3000 V~
- Very high current, fast switching IGBT
- Low  $V_{CE(sat)}$  - for minimum on-state conduction losses
- MOS Gate turn-on - drive simplicity
- Low collector-to-case capacitance (< 50 pF)
- Low package inductance (< 5 nH) - easy to drive and to protect

### Applications

- AC motor speed control
- DC servo and robot drives
- DC choppers
- Uninterruptible power supplies (UPS)
- Switch-mode and resonant-mode power supplies


### Advantages

- Easy to mount with 2 screws
- Space savings
- High power density

Symbol	Test Conditions	Characteristic Values ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)		
		min.	typ.	max.
$BV_{CES}$	$I_C = 1 \text{ mA}, V_{GE} = 0 \text{ V}$	600		V
$V_{GE(th)}$	$I_C = 1 \text{ mA}, V_{CE} = V_{GE}$	2.5		5.5 V
$I_{CES}$	$V_{CE} = V_{CES}$ $V_{GE} = 0 \text{ V}$			$T_J = 25^\circ\text{C}$ : 200 $\mu\text{A}$ $T_J = 125^\circ\text{C}$ : 2 mA
$I_{GES}$	$V_{CE} = 0 \text{ V}, V_{GE} = \pm 20 \text{ V}$			$\pm 400$ nA
$V_{CE(sat)}$	$I_C = I_{C90}, V_{GE} = 15 \text{ V}$			2.1 V

Symbol	Test Conditions	Characteristic Values ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)		
		min.	typ.	max.
$g_{fs}$	$I_C = 60\text{ A}; V_{CE} = 10\text{ V}$ , Pulse test, $t \leq 300\ \mu\text{s}$ , duty cycle $\leq 2\%$	50	75	S
$C_{ies}$	$V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$		11000	pF
$C_{oes}$			680	pF
$C_{res}$			190	pF
$Q_g$	$I_C = I_{C90}, V_{GE} = 15\text{ V}, V_{CE} = 0.5 V_{CES}$		350	nC
$Q_{ge}$			72	nC
$Q_{gc}$			131	nC
$t_{d(on)}$	<b>Inductive load, <math>T_J = 25^\circ\text{C}</math></b> $I_C = 100\text{ A}, V_{GE} = 15\text{ V}$ $V_{CE} = 0.8 V_{CES}, R_G = R_{off} = 2.4\ \Omega$ Remarks: Switching times may increase for higher $T_J$ or increased $R_G$		60	ns
$t_{ri}$			45	ns
$E_{on}$			2.4	mJ
$t_{d(off)}$			200	360 ns
$t_{ri}$			160	280 ns
$E_{off}$			5.5	9.6 mJ
$t_{d(on)}$	<b>Inductive load, <math>T_J = 125^\circ\text{C}</math></b> $I_C = 100\text{ A}, V_{GE} = 15\text{ V}$ $V_{CE} = 0.8 V_{CES}, R_G = R_{off} = 2.4\ \Omega$ Remarks: Switching times may increase for $V_{CE}(\text{Clamp}) > 0.8 \cdot V_{CES}$ , higher $T_J$ or increased $R_G$		60	ns
$t_{ri}$			60	ns
$E_{on}$			4.8	mJ
$t_{d(off)}$			290	ns
$t_{ri}$			250	ns
$E_{off}$			8.7	mJ
$R_{thJC}$			0.21	KW
$R_{thCK}$		0.05		KW

### SOT-227B miniBLOC

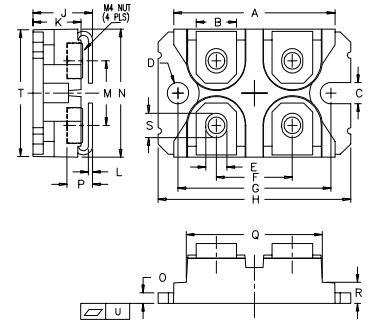


SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.240	1.255	31.50	31.88
B	.307	.323	7.80	8.20
C	.161	.169	4.09	4.29
D	.161	.169	4.09	4.29
E	.161	.169	4.09	4.29
F	.587	.595	14.91	15.11
G	1.186	1.193	30.12	30.30
H	1.496	1.505	38.00	38.23
J	.460	.481	11.68	12.22
K	.351	.378	8.92	9.60
L	.030	.033	0.76	0.84
M	.496	.506	12.60	12.85
N	.990	1.001	25.15	25.42
O	.078	.084	1.98	2.13
P	.195	.235	4.95	5.97
Q	1.045	1.059	26.54	26.90
R	.155	.174	3.94	4.42
S	.186	.191	4.72	4.85
T	.968	.987	24.59	25.07
U	-.002	.004	-0.05	0.1


IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:	4,835,592	4,931,844	5,049,961	5,237,481	6,162,665	6,404,065 B1	6,683,344	6,727,585
	4,850,072	5,017,508	5,063,307	5,381,025	6,259,123 B1	6,534,343	6,710,405 B2	6,759,692
	4,881,106	5,034,796	5,187,117	5,486,715	6,306,728 B1	6,583,505	6,710,463	


**Fig. 1. Output Characteristics @ 25 °C**

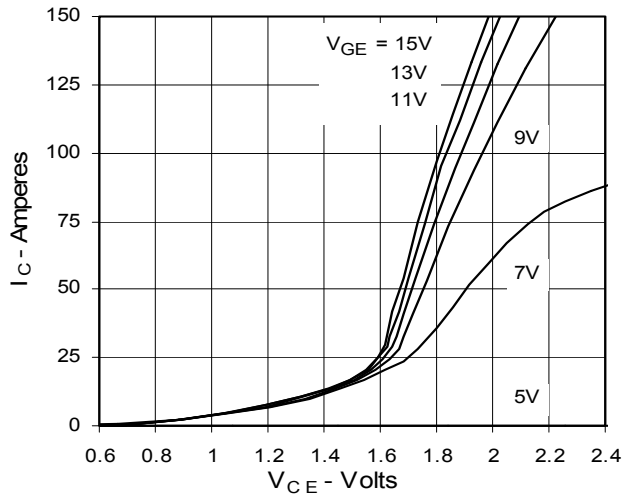


**Fig. 2. Extended Output Characteristics @ 25 °C**

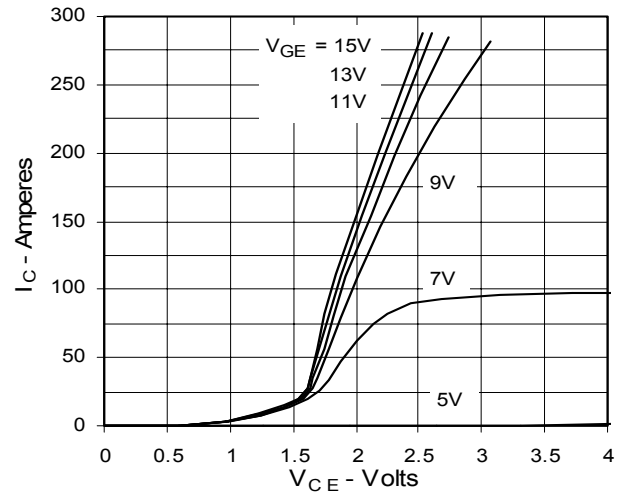


**Fig. 3. Output Characteristics @ 125 °C**

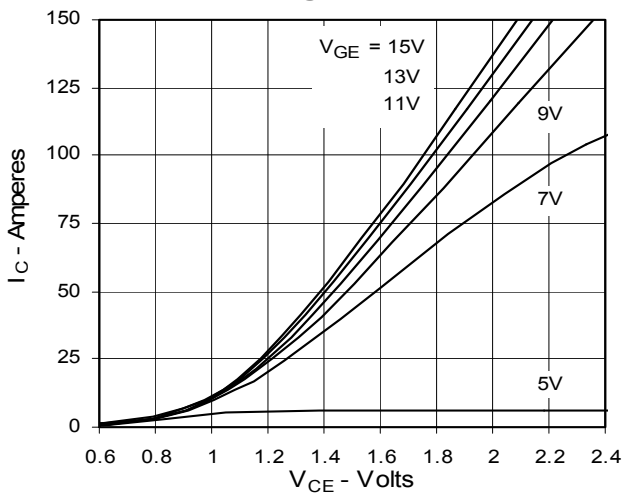


**Fig. 4. Dependence of  $V_{CE(sat)}$  on Temperature**

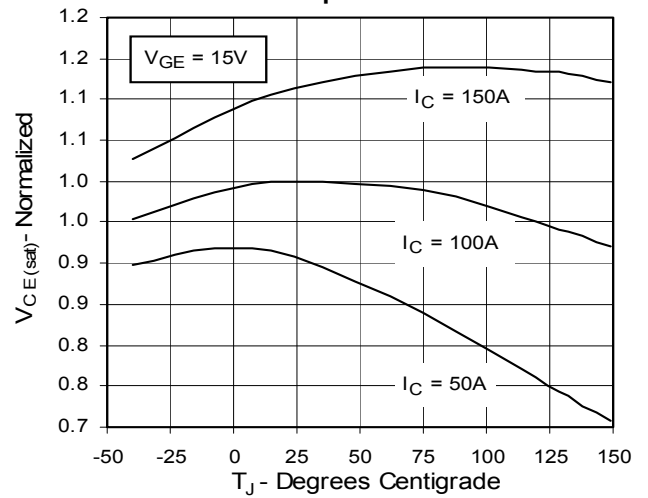


**Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter voltage**

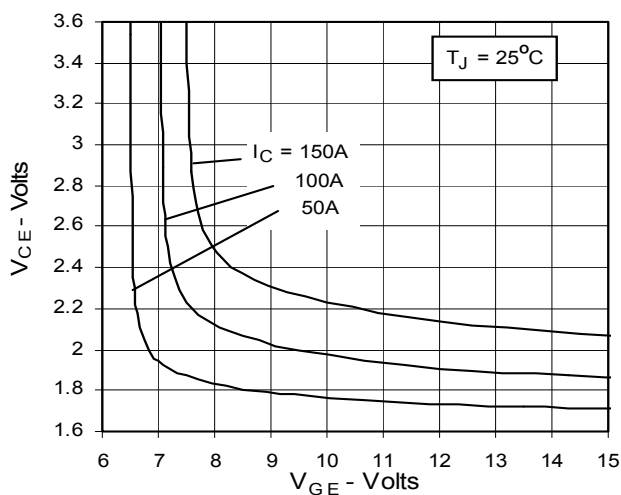


**Fig. 6. Input Admittance**

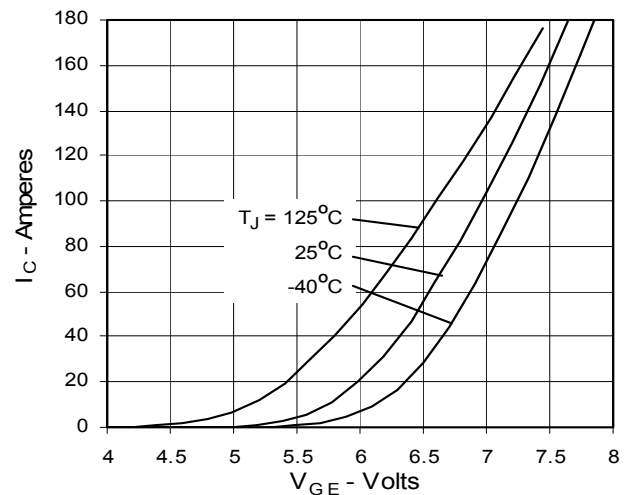


**Fig. 7. Transconductance**

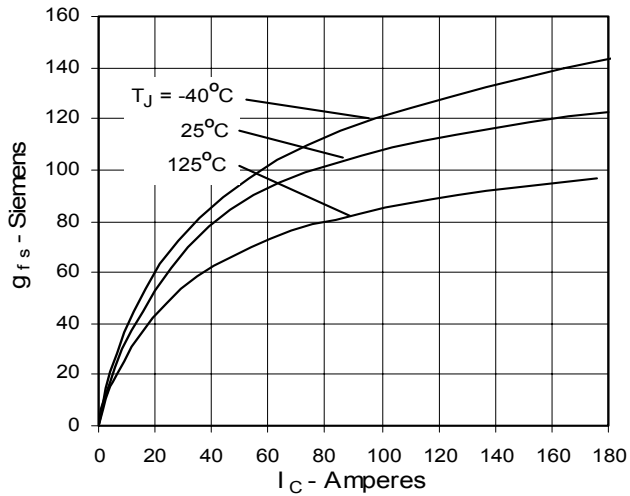


**Fig. 8. Dependence of Turn-off Energy Loss on  $R_G$**

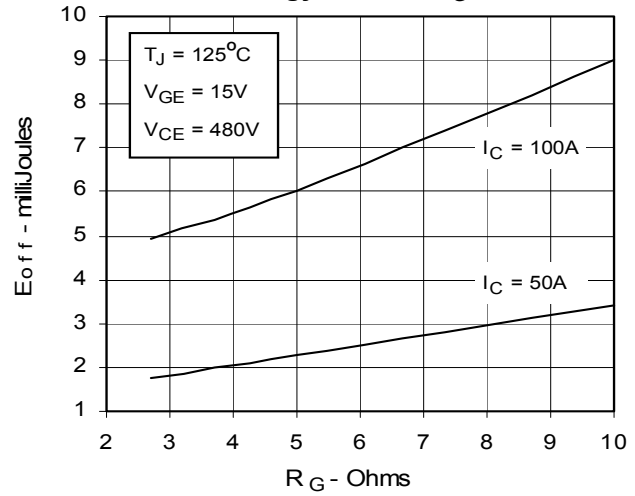


**Fig. 9. Dependence of Turn-Off Energy Loss on  $I_C$**

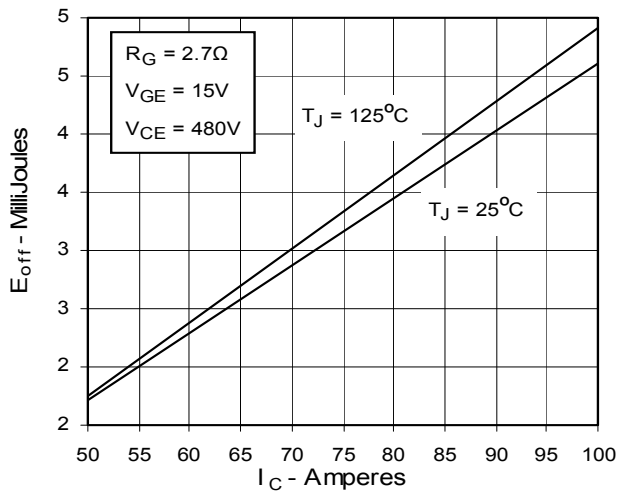


**Fig. 10. Dependence of Turn-off Energy Loss on Temperature**

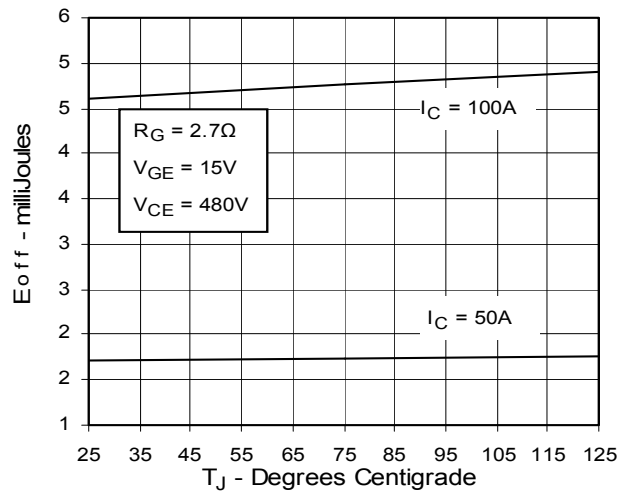


**Fig. 11. Dependence of Turn-off Switching Time on  $R_G$**

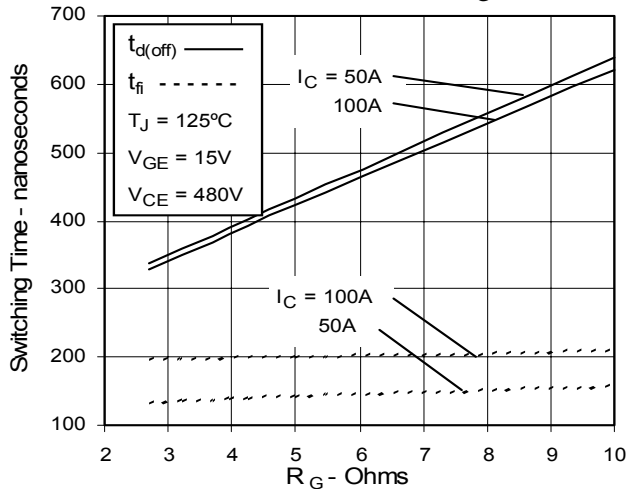


**Fig. 12. Dependence of Turn-off Switching Time on  $I_C$**

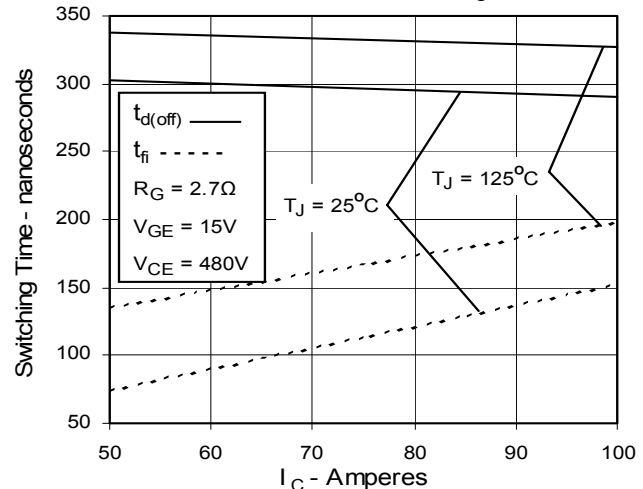


**Fig. 13. Dependence of Turn-off Switching Time on Temperature**

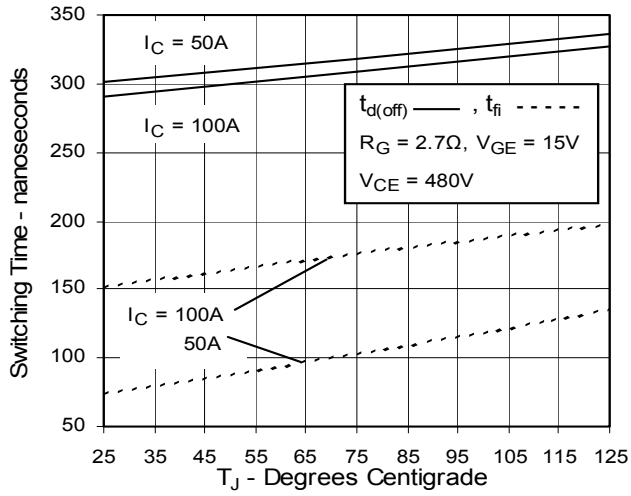


**Fig. 14. Gate Charge**

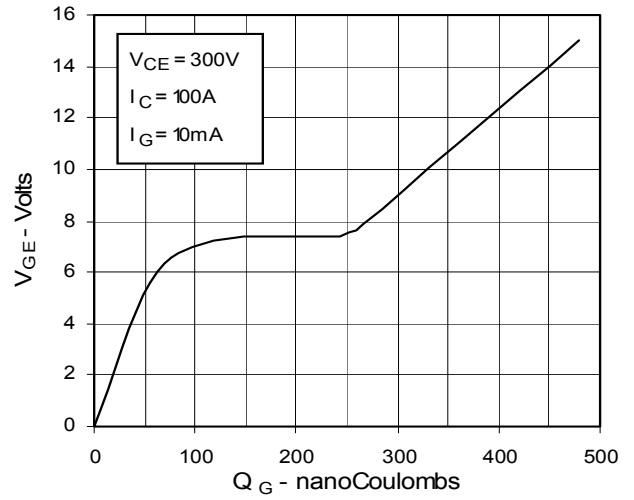

**Fig. 15. Capacitance**

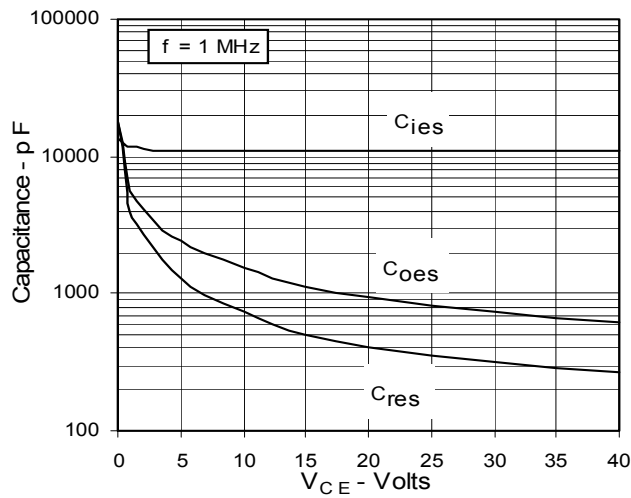

**Fig. 16. Reverse-Bias Safe Operating Area**

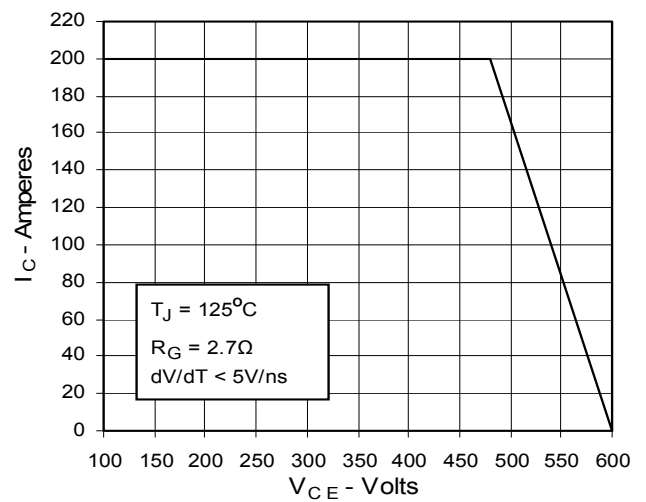

**Fig. 17. Maximum Transient Thermal Resistance**

