



Converter - Brake - Inverter Module

Low Loss Trench IGBT

Three Phase Rectifier	Brake Chopper	Three Phase Inverter
$V_{RRM} = 1600 \text{ V}$	$V_{CES} = 1200 \text{ V}$	$V_{CES} = 1200 \text{ V}$
$I_{DAVM25} = 90 \text{ A}$	$I_{C25} = 29 \text{ A}$	$I_{C25} = 29 \text{ A}$
$I_{FSM} = 300 \text{ A}$	$V_{CE(sat)} = 1.7 \text{ V}$	$V_{CE(sat)} = 1.7 \text{ V}$

Part name (Marking on product)

MITB15WB1200TMH

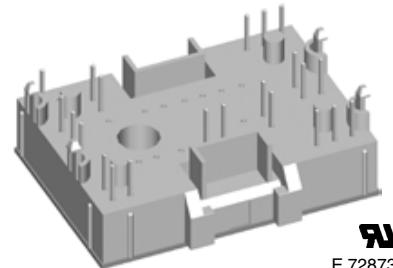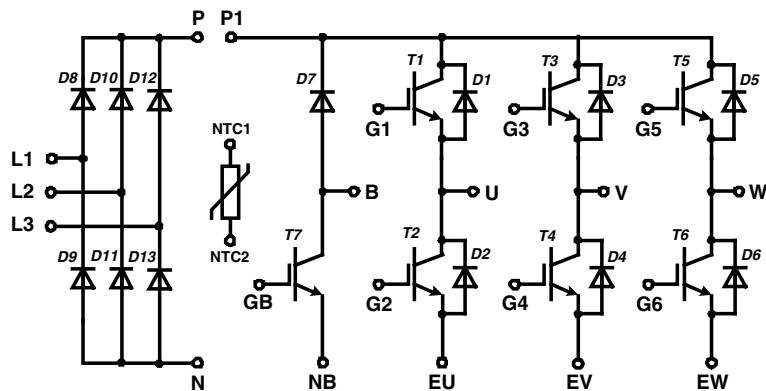

Pin configuration see outlines.

Features:

- High level of integration - only one power semiconductor module required for the whole drive
- Inverter with low loss Trench IGBTs
 - very low saturation voltage
 - positive temperature coefficient
 - short tail current
- Epitaxial free wheeling diodes with hiperfast soft reverse recovery
- Temperature sense included

Application:

- AC motor drives
- Pumps, Fans
- Washing machines
- Air-conditioning system
- Inverter and power supplies

Package:

- "Mini" package
- Assembly height is 17 mm
- Insulated base plate
- Pins suitable for wave soldering and PCB mounting
- Assembly clips available
 - IXKU 5-505 screw clamp
 - IXRB 5-506 click clamp
- UL registered E72873

Output Inverter T1 - T6

Ratings						
Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_{CES}	collector emitter voltage		$T_{VJ} = 150^\circ\text{C}$		1200	V
V_{GES}	max. DC gate voltage				± 20	V
V_{GEM}	max. transient collector gate voltage	continuous transient			± 30	V
I_{C25}	collector current		$T_C = 25^\circ\text{C}$		29	A
I_{C80}			$T_C = 80^\circ\text{C}$		20	A
P_{tot}	total power dissipation		$T_C = 25^\circ\text{C}$		100	W
$V_{CE(\text{sat})}$	collector emitter saturation voltage	$I_C = 15 \text{ A}; V_{GE} = 15 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	1.7 2.0	2.2	V
$V_{GE(\text{th})}$	gate emitter threshold voltage	$I_C = 0.5 \text{ mA}; V_{GE} = V_{CE}$	$T_{VJ} = 25^\circ\text{C}$	5	5.5	V
I_{CES}	collector emitter leakage current	$V_{CE} = V_{CES}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		0.6	mA
I_{GES}	gate emitter leakage current	$V_{GE} = \pm 20 \text{ V}$			150	nA
C_{ies}	input capacitance	$V_{CE} = 25 \text{ V}; V_{GE} = 0 \text{ V}; f = 1 \text{ MHz}$		1100		pF
$Q_{G(\text{on})}$	total gate charge	$V_{CE} = 600 \text{ V}; V_{GE} = 15 \text{ V}; I_C = 15 \text{ A}$		92		nC
$t_{d(on)}$ t_r $t_{d(off)}$ t_f E_{on} E_{off}	turn-on delay time current rise time turn-off delay time current fall time turn-on energy per pulse turn-off energy per pulse	inductive load $V_{CE} = 600 \text{ V}; I_C = 15 \text{ A}$ $V_{GE} = \pm 15 \text{ V}; R_G = 75 \Omega$	$T_{VJ} = 25^\circ\text{C}$	55 30 320 200 1.2 1.3		ns ns ns ns mJ mJ
$t_{d(on)}$ t_r $t_{d(off)}$ t_f E_{on} E_{off}	turn-on delay time current rise time turn-off delay time current fall time turn-on energy per pulse turn-off energy per pulse	inductive load $V_{CE} = 600 \text{ V}; I_C = 15 \text{ A}$ $V_{GE} = \pm 15 \text{ V}; R_G = 75 \Omega$	$T_{VJ} = 125^\circ\text{C}$	60 35 360 340 2 1.7		ns ns ns ns mJ mJ
RBSOA	reverse bias safe operating area	$V_{GE} = \pm 15 \text{ V}; R_G = 75 \Omega; I_C = 30 \text{ A}; T_{VJ} = 125^\circ\text{C}$	$V_{CEK} \leq V_{CES} \cdot d_i/dt$			V
I_{sc} (SCSOA)	short circuit safe operating area	$V_{CE} = 720 \text{ V}; V_{GE} = \pm 15 \text{ V}; T_{VJ} = 125^\circ\text{C}$ $R_G = 75 \Omega; t_p = 10 \mu\text{s}; \text{non-repetitive}$		68		A
R_{thJC} R_{thCH}	thermal resistance junction to case thermal resistance case to heatsink	(per IGBT)		0.4	1.2	K/W K/W

Output Inverter D1 - D6

Ratings						
Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_{RRM}	max. repetitive reverse voltage		$T_{VJ} = 150^\circ\text{C}$		1200	V
I_{F25}	forward current		$T_C = 25^\circ\text{C}$		24	A
I_{F80}			$T_C = 80^\circ\text{C}$		16	A
V_F	forward voltage	$I_F = 15 \text{ A}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	2.3 1.9	2.7	V
Q_{rr} I_{RM} t_{rr} E_{rec}	reverse recovery charge max. reverse recovery current reverse recovery time reverse recovery energy	$V_R = 600 \text{ V}$ $di_F/dt = -420 \text{ A}/\mu\text{s}$ $I_F = 15 \text{ A}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 125^\circ\text{C}$	2.3 19.6 330 0.68		μC A ns mJ
R_{thJC} R_{thCH}	thermal resistance junction to case thermal resistance case to heatsink	(per diode)		0.55	1.6	K/W K/W

 $T_C = 25^\circ\text{C}$ unless otherwise stated

IXYS reserves the right to change limits, test conditions and dimensions.

20100906a

Brake T7

Ratings						
Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_{CES}	collector emitter voltage		$T_{VJ} = 150^\circ\text{C}$		1200	V
V_{GES}	max. DC gate voltage				± 20	V
V_{GEM}	max. transient collector gate voltage	continuous transient			± 30	V
I_{C25}	collector current		$T_C = 25^\circ\text{C}$		29	A
I_{C80}			$T_C = 80^\circ\text{C}$		20	A
P_{tot}	total power dissipation		$T_C = 25^\circ\text{C}$		100	W
$V_{CE(\text{sat})}$	collector emitter saturation voltage	$I_C = 15 \text{ A}; V_{GE} = 15 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	1.7 2.0	2.2	V
$V_{GE(\text{th})}$	gate emitter threshold voltage	$I_C = 0.5 \text{ mA}; V_{GE} = V_{CE}$	$T_{VJ} = 25^\circ\text{C}$	5	5.5	V
I_{CES}	collector emitter leakage current	$V_{CE} = V_{CES}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		0.6	mA
I_{GES}	gate emitter leakage current	$V_{GE} = \pm 20 \text{ V}$			150	nA
C_{ies}	input capacitance	$V_{CE} = 25 \text{ V}; V_{GE} = 0 \text{ V}; f = 1 \text{ MHz}$		1100		pF
$Q_{G(\text{on})}$	total gate charge	$V_{CE} = 600 \text{ V}; V_{GE} = 15 \text{ V}; I_C = 15 \text{ A}$		92		nC
$t_{d(on)}$	turn-on delay time	$V_{CE} = 600 \text{ V}; I_C = 15 \text{ A}$ $V_{GE} = \pm 15 \text{ V}; R_G = 75 \Omega$	$T_{VJ} = 25^\circ\text{C}$	55		ns
t_r	current rise time			30		ns
$t_{d(off)}$	turn-off delay time			320		ns
t_f	current fall time			200		ns
E_{on}	turn-on energy per pulse			1.0		mJ
E_{off}	turn-off energy per pulse			1.3		mJ
$t_{d(on)}$	turn-on delay time	$V_{CE} = 600 \text{ V}; I_C = 15 \text{ A}$ $V_{GE} = \pm 15 \text{ V}; R_G = 75 \Omega$	$T_{VJ} = 125^\circ\text{C}$	60		ns
t_r	current rise time			35		ns
$t_{d(off)}$	turn-off delay time			360		ns
t_f	current fall time			340		ns
E_{on}	turn-on energy per pulse			1.6		mJ
E_{off}	turn-off energy per pulse			1.7		mJ
RBSOA	reverse bias safe operating area	$V_{GE} = \pm 15 \text{ V}; R_G = 75 \Omega; I_C = 30 \text{ A}; T_{VJ} = 125^\circ\text{C}$	$V_{CEK} \leq V_{CES} \cdot d_i/dt$			V
I_{SC} (SCSOA)	short circuit safe operating area	$V_{CE} = 720 \text{ V}; V_{GE} = \pm 15 \text{ V}; R_G = 75 \Omega; t_p = 10 \mu\text{s}$; non-repetitive	$T_{VJ} = 125^\circ\text{C}$	68		A
R_{thJC}	thermal resistance junction to case	(per IGBT)		0.4	1.2	K/W
R_{thCH}	thermal resistance case to heatsink					

Brake Chopper D7

Ratings						
Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_{RRM}	max. repetitive reverse voltage		$T_{VJ} = 150^\circ\text{C}$		1200	V
I_{F25}	forward current		$T_C = 25^\circ\text{C}$		15	A
I_{F80}			$T_C = 80^\circ\text{C}$		10	A
V_F	forward voltage	$I_F = 15 \text{ A}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	3.0 2.4	3.3	V
I_R	reverse current	$V_R = V_{RRM}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		0.1	mA
Q_{rr}	reverse recovery charge	$V_R = 600 \text{ V}$ $di_F/dt = tbd \text{ A}/\mu\text{s}$ $I_F = 10 \text{ A}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 125^\circ\text{C}$	tbd		μC
I_{RM}	max. reverse recovery current			tbd		A
t_{rr}	reverse recovery time			tbd		ns
E_{rec}	reverse recovery energy			tbd		μJ
R_{thJC}	thermal resistance junction to case	(per diode)		0.85	2.5	K/W
R_{thCH}	thermal resistance case to heatsink					

 $T_C = 25^\circ\text{C}$ unless otherwise stated

IXYS reserves the right to change limits, test conditions and dimensions.

20100906a

Input Rectifier Bridge D8 - D11

Ratings						
Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_{RRM}	max. repetitive reverse voltage	$T_{VJ} = 25^\circ\text{C}$		1600		V
I_{FAV}	average forward current	sine 180°	$T_C = 80^\circ\text{C}$	22		A
I_{DAVM}	max. average DC output current	rect.; $d = 1/3$	$T_C = 80^\circ\text{C}$	61		A
I_{FSM}	max. forward surge current	$t = 10 \text{ ms}; \text{sine } 50 \text{ Hz}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	300 tbd		A A
I^2t	I^2t value for fusing	$t = 10 \text{ ms}; \text{sine } 50 \text{ Hz}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	450 tbd		A ² s A ² s
P_{tot}	total power dissipation		$T_C = 25^\circ\text{C}$	50		W
V_F	forward voltage	$I_F = 30 \text{ A}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	1.35 1.35	1.6	V V
I_R	reverse current	$V_R = V_{RRM}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	0.01 0.3		mA mA
R_{thJC}	thermal resistance junction to case	(per diode)			2.1	K/W
R_{thCH}	thermal resistance case to heatsink	(per diode)		0.7		K/W


Temperature Sensor NTC

Ratings						
Symbol	Definitions	Conditions	min.	typ.	max.	Unit
R_{25}	resistance		$T_C = 25^\circ\text{C}$	4.75	5.0	kΩ
$B_{25/50}$				3375		K

Module

Ratings						
Symbol	Definitions	Conditions	min.	typ.	max.	Unit
T_{VJ}	operating temperature		-40		125	°C
T_{VJM}	max. virtual junction temperature				150	°C
T_{stg}	storage temperature		-40		125	°C
V_{ISOL}	isolation voltage	$I_{ISOL} \leq 1 \text{ mA}; 50/60 \text{ Hz}$			2500	V~
CTI	comparative tracking index				-	
F_C	mounting force		40		80	N
d_s	creep distance on surface			12.7		mm
d_A	strike distance through air			12		mm
Weight				35		g

Equivalent Circuits for Simulation




Ratings						
Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_0	rectifier diode	D8 - D13	$T_{VJ} = 125^\circ\text{C}$	0.9 16		V mΩ
R_0						
V_0	IGBT	T1 - T6	$T_{VJ} = 125^\circ\text{C}$	1.0 67		V mΩ
R_0						
V_0	free wheeling diode	D1 - D6	$T_{VJ} = 125^\circ\text{C}$	1.15 50		V mΩ
R_0						
V_0	IGBT	T7	$T_{VJ} = 125^\circ\text{C}$	1.0 67		V mΩ
R_0						
V_0	free wheeling diode	D7	$T_{VJ} = 125^\circ\text{C}$	1.6 53		V mΩ
R_0						

IXYS reserves the right to change limits, test conditions and dimensions.

 $T_C = 25^\circ\text{C}$ unless otherwise stated


20100906a

Circuit Diagram

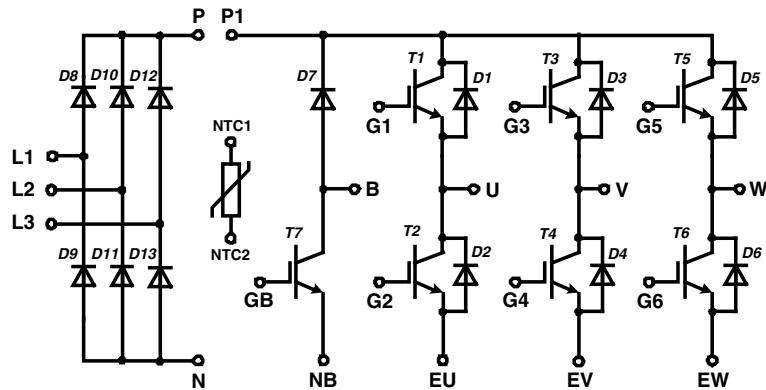


Outline Drawing

Dimensions in mm (1 mm = 0.0394")

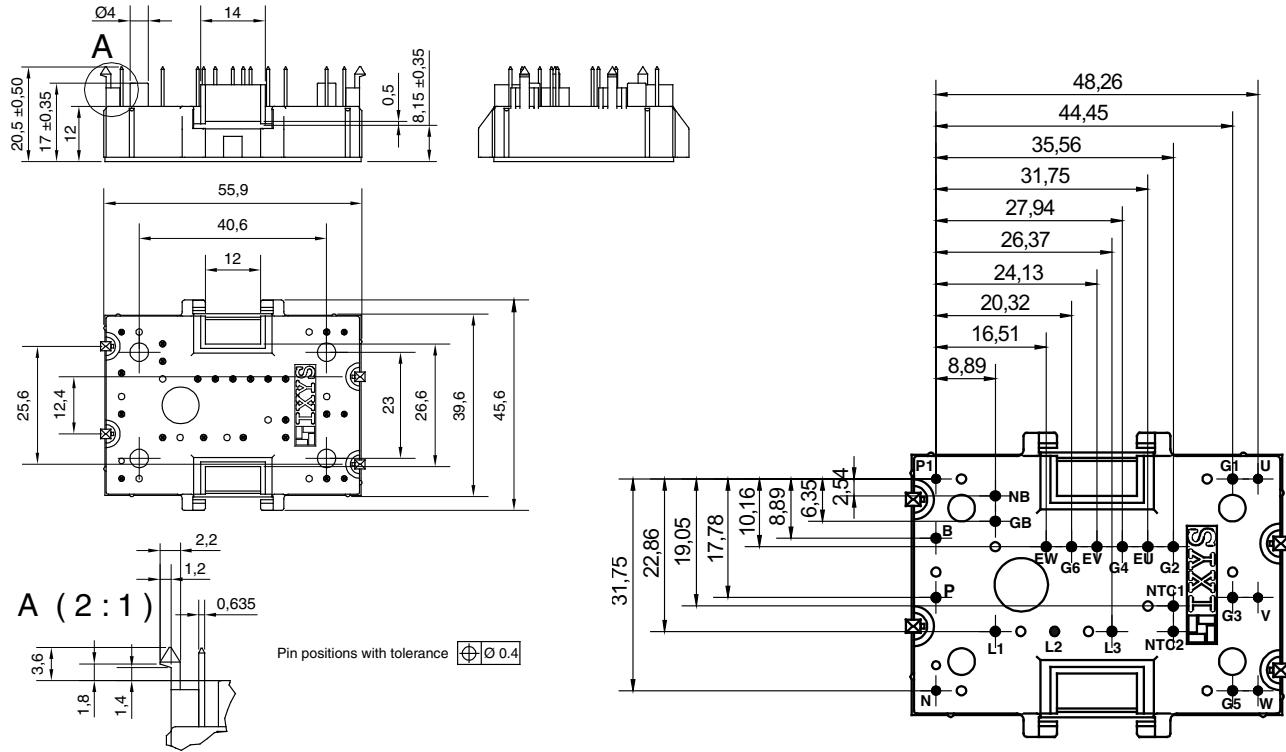

Product Marking



Part number

M = Module
 I = IGBT
 T = Trench
 A = Gen³ / low loss
 10 = Current Rating [A]
 WB = 6-Pack + 3~ Rectifier Bridge & Brake Unit
 1200 = Reverse Voltage [V]
 T = NTC
 MH = MiniPack2




Ordering	Part Name	Marking on Product	Delivering Mode	Base Qty	Ordering Code
Standard	MITB 15 WB 1200 TMH	MITB15WB1200TMH	Box	20	502893

IXYS reserves the right to change limits, test conditions and dimensions.


20100906a

© 2010 IXYS All rights reserved


5 - 8

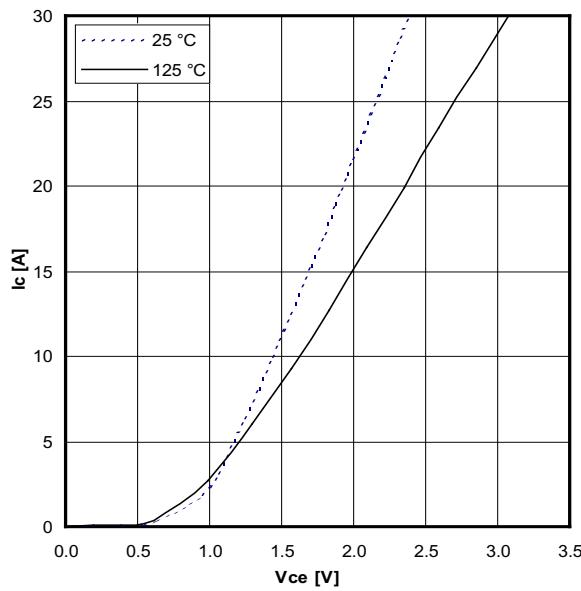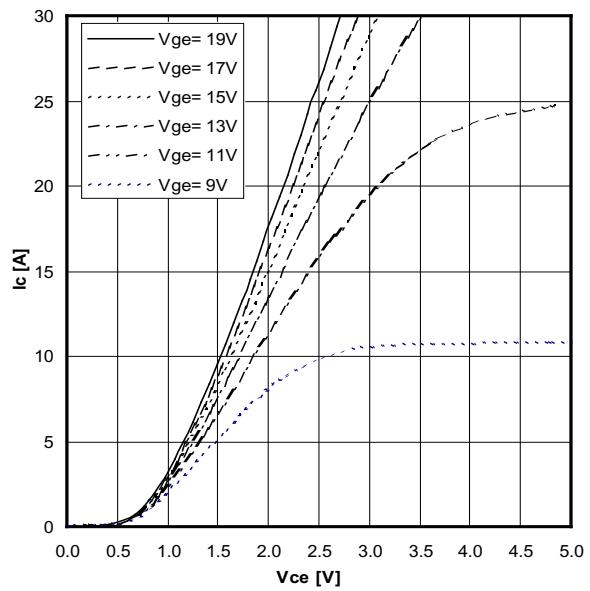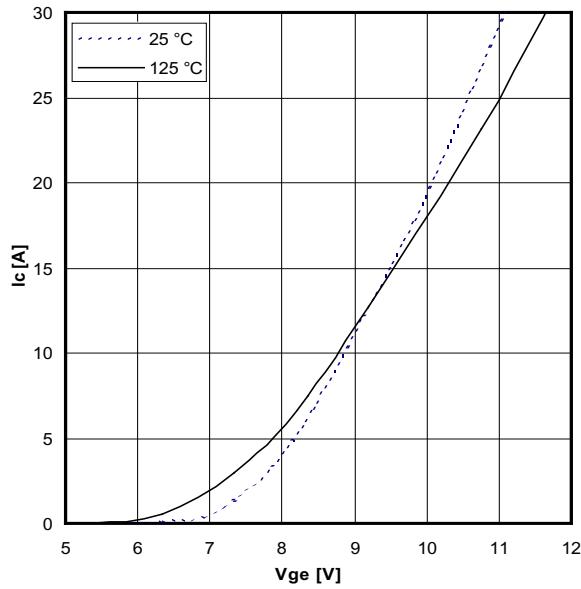Typical output characteristics, $V_{GE} = 15\text{ V}$ Typical output characteristics (125°C)


Typical transfer characteristics

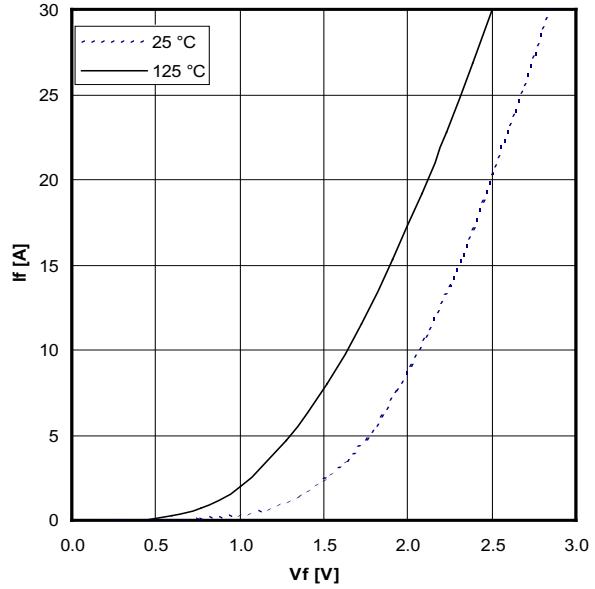


Typical forward characteristics of freewheeling diode

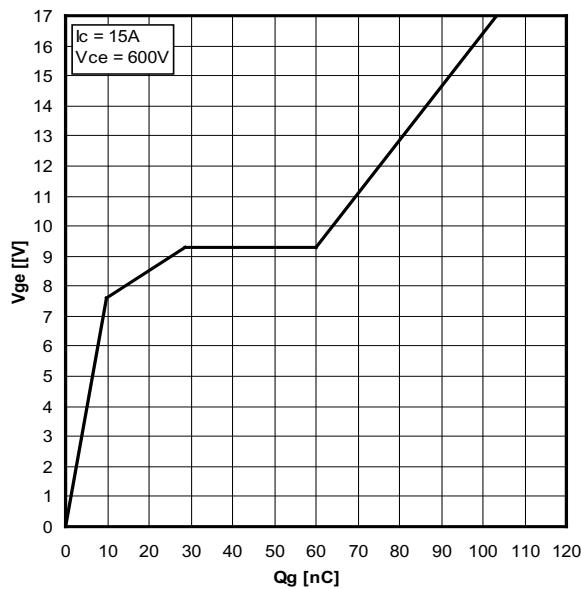


Typical turn on gate charge

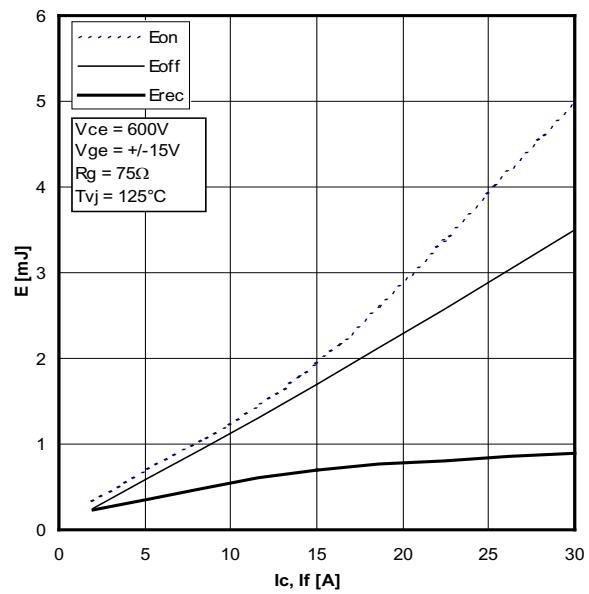


Typical switching energy versus collector current

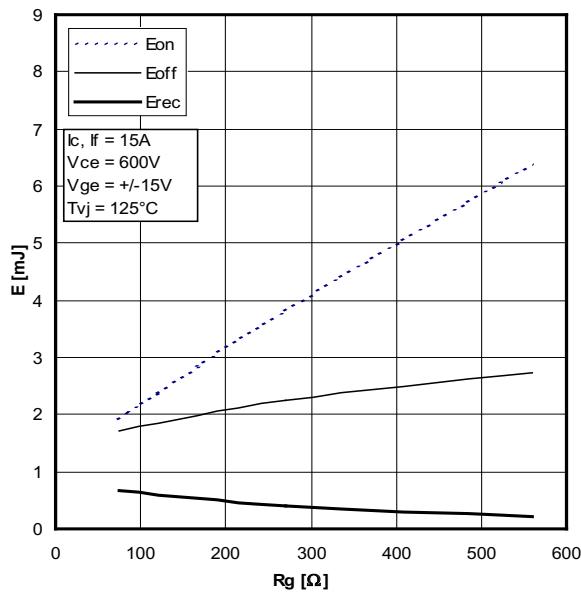


Typical switching energy versus gate resistance

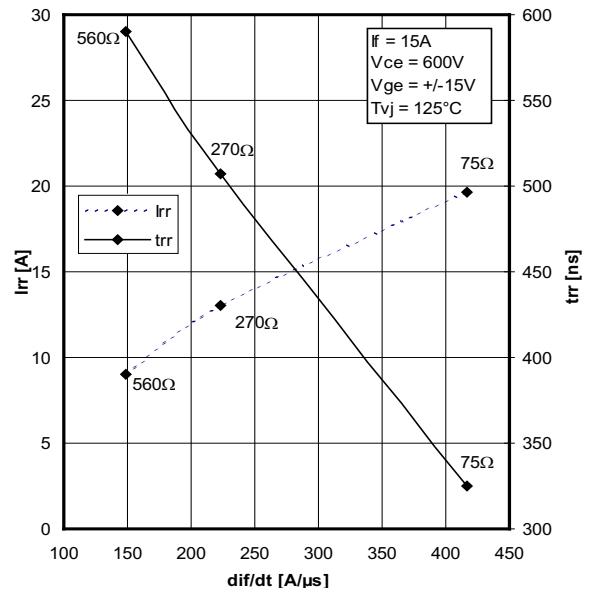


Typical turn-off characteristics of free wheeling diode

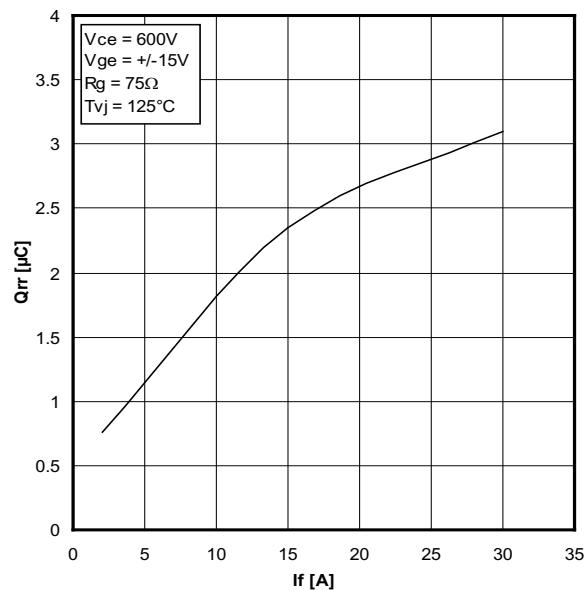


Typical turn-off characteristics of free wheeling diode

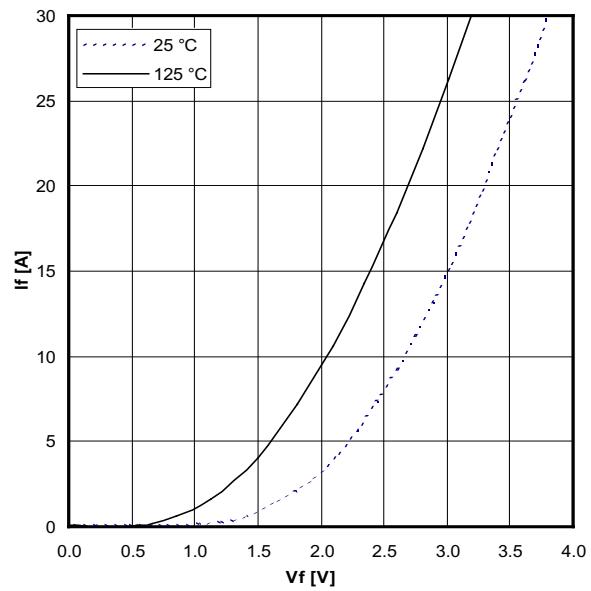

Typical forward characteristics of brake diode

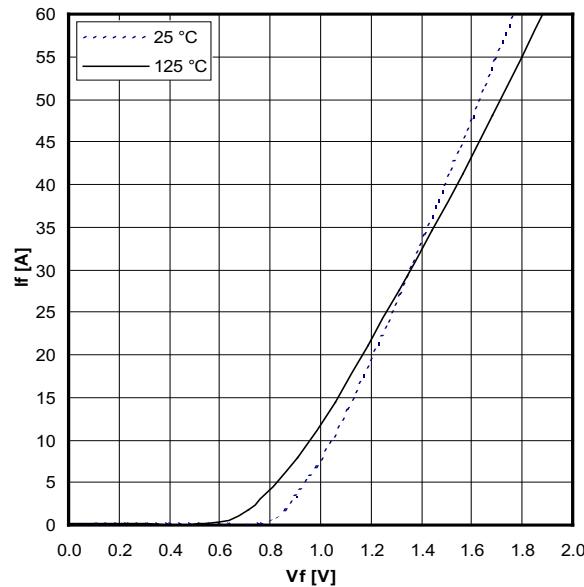

Typical forward characteristics per rectifier

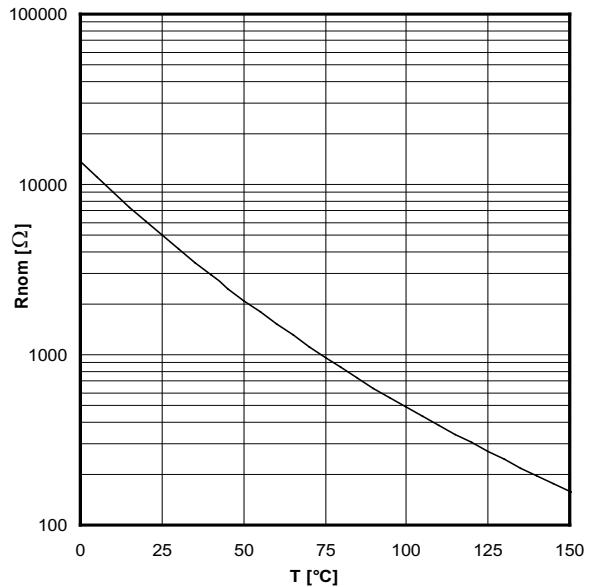

Typical thermistor resistance versus temperature

IXYS reserves the right to change limits, test conditions and dimensions.

20100906a

© 2010 IXYS All rights reserved

8 - 8