


RECOMMENDED PANEL CUTOUT

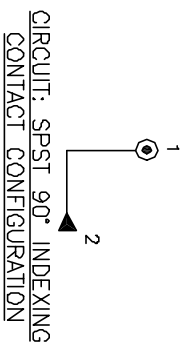

| SWITCH FUNCTION |       |
|-----------------|-------|
| POS 1           | POS 2 |
| ↶               | ↷     |
| DNF             | (DN)  |

- NOTES:
- ALL DIMENSIONS IN MM [INCH]
  - GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  - TERM. NOS. FOR REFERENCE ONLY.
  - RATING: 1A @125VAC, 0.5A @250VAC
  - CONTACT RESISTANCE: 10mILLI-OHMS
  - DIELECTRIC STRENGTH: 1000 VAC-1Minute
  - INSULATION RESISTANCE: 200 Mega-OHMS min.
  - MATERIALS:
- HOUSING: ZINC ALLOY DIE CAST  
 CYLINDER: ZINC ALLOY W/CHROME PLATING  
 TERMINAL AND CONTACTS: SILVER PLATED  
 KEYS (2) KEY CODE 701: TUBULAR  
 ZINC ALLOY, CHROME PLATING

- LEGEND
- =Detent Positions
  - ⊙ =Key pull possible in these positions
  - ▲ =MOMENTARY POS.

| REV. | ECN No. | DESCRIPTION             | DATE    | CHKD |
|------|---------|-------------------------|---------|------|
| A    | 12768   | RELEASED FOR PRODUCTION | 1/27/03 | CJB  |
| B    | 12768   | DESC WAS WRONG          | 1/29/03 | CJB  |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

|            |  |       |  |         |     |         |     |
|------------|--|-------|--|---------|-----|---------|-----|
| TITLE      |  | SCALE |  | DATE    | DR  | DWG     | REV |
| K0103E-701 |  | 1.5:1 |  | 1/27/03 | CJB | K100206 | B   |

**E-SWITCH®**