
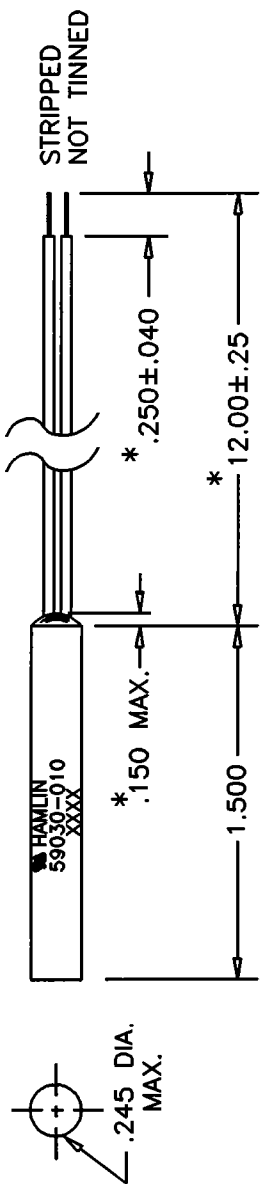



Electrical

CONTACT TYPE: FORM A
 CONTACT RATING: 10 WATTS
 SWITCHING VOLTAGE, MAX.: 150 VDC
 SWITCHING CURRENT, MAX.: 0.25 AMPS
 CARRY CURRENT, MAX.: 0.50 AMPS
 CONTACT RESISTANCE INCLUDING LEADS, MAX.: 200 mΩ
 BREAKDOWN VOLTAGE, MIN.: 250 VDC


Physical

CAPSULE: BLACK UL94V-0 POLYESTER
 POTTING: BLACK EPOXY
 LEADS: WIRE PVC 24 AWG 7/32 UL1569 BLACK
 ACTUATOR: 57030-000
 ACTUATE DISTANCE: .150" MIN.
 DEACTUATE DISTANCE: .800" MAX.



DIMENSIONS ARE IN INCHES
 TOLERANCES: ±.010 UNLESS NOTED
 * KEY ASSEMBLY DIMENSIONS

Print Detail

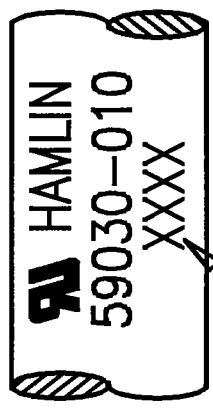

-4 DIGIT DATE CODE

59030-010 SENSOR

AF	UPDATE/FROMAT	A9433	BJW	2/15/02	BJW	3/13/02	Breed Electronics Limited Partnership		DCR No. 1243
REV.	DESCRIPTION OF REVISION	DCR No.	BY	DATE	APP.	DATE	App'd	DATE	D10-59030-010
								5/11/88	Page 1 of 1

HAMLIN

Breed Electronics Limited Partnership

Dwn.

DRR

DATE

5/2/88

App'd

DRR

DATE

5/11/88

D10-59030-010

Page 1 of 1